inédit LIGHTING

Cir Ante SANTA & COLE Pen



Chandelier S



Chandelier M



Chandelier L



С

В

that stands out hugely from its surrounding area. Its dense array of ources may be hung thanks to the enlargeable diameter of the structure,

ts shape, texture and the warmth of its light. The varying shades mospheres: from the porcelain of Sargadelos (Galicia, Spain) that paque elegance of brass.

al lighting by combining structures, shades and light textures. The s to illuminate larger areas, in forms such as the Chandelier, Cascada, ated elements. The fusion of technology and tradition; innovation

ink with black matte finish. ished brass.

Black aluminium circular structure:

(A) ø 100 cm / 39.4" for 20 lampshades

(B) Ø 130cm / 51.2" for 30 lampshades (C) Ø 160 cm / 63" for 40 lampshades

Adjustable black metallic circular canopy + equipment.

2 hanging system options: direct cable to ceiling plate or direct cable to ceiling.

Suitable for Junction Box (UL market).

Electric cable length: 5 m / 196.8"

Approximate weight (unpacked):

(A) Chandelier S: 20 Kg / 44 lb (B) Chandelier M: 30 Kg / 66 lb (C) Chandelier L: 40 Kg / 88 lb

Lampshades:

Porcelain: 0,5 kg / 1.1 lb Glass: 0,6 kg / 1.3 lb Brass: 0,3 Kg / 0.7 lb



LIGHTING




Technical information:

Light source included (dimmable): LED module

Rated input wattage (LED capsule): 5,7 W Operating current: 530 mA Colour Temp.: 2.700 K CRI: 90 Lifetime: 40.000 h

(A) 20 light sources Rated input wattage: 114 W Luminous flux: Porcelain 3.280 lm




(C) 40 light sources Rated input wattage: 228 W Luminous flux: Porcelain 6.560 lm Glass 22.360 lm Brass 7.040 lm


Built-in adjustable LED. Lamp suitable for dimming 1-10V. / DALI. Not included external dimmer switch 1-10V. / DALI Energy efficiency class (E.E.C): A⁺⁺...A. Lamp suitable only for indoor use.

Input voltage: 120 ~ 277 Vac. (50 Hz / 60 Hz). Acording to destination.

White opal glass lampshade



Brass lampshade





LIGHTING




Regulations:

CE UNE-EN 60598 UNE-EN 55015 UNE-EN 62031 UNE-EN 61000-3-2

UNE-EN 60529 UNE-EN 61347-2-13

UL Dry and damp location UL-1598 UL-8750 E-336377

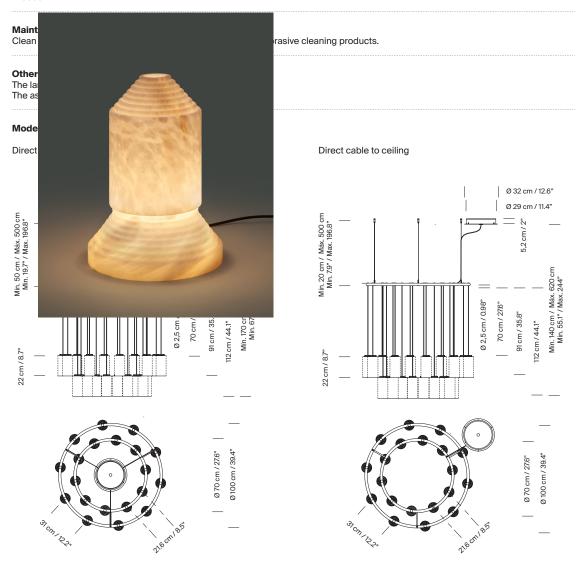







Model B: Cirio Chandelier M

Direct cable to canopy

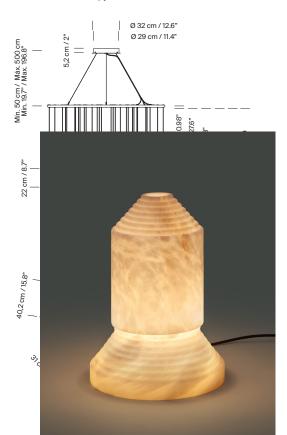

Direct cable to ceiling

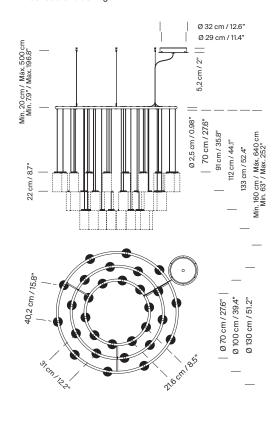




Cir SANTA & COLE

Model C: Cirio Chandelier L

Direct cable to canopy

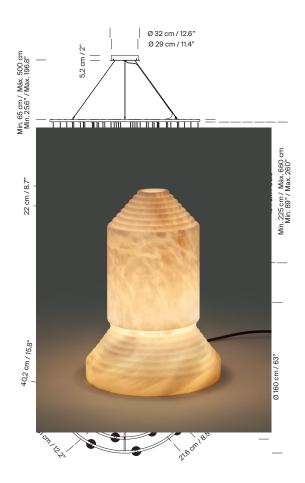




Cir Ante Pen

SANTA & COLE

Model C: Cirio Chandelier L

Direct cable to ceiling

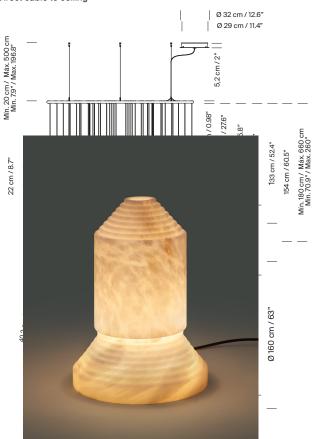

Model: Lampshades

White porcelain

Ø10 cm / 3.9"

21 cm / 8.3"

21 cm / 8.3"

Ø11 cm / 4.3"

White opal glass

Brass



Collection: Pendant lamps











Cirio Múltiple Cirio Cascada Cirio Simple

Cirio Lineal

Cirio Chandelier