

**inédit**

LIGHTING

Name **COD-C**  
Number **N126**  
Collection **NAUTIC**

**TEKNA**


## General

Location	Indoor
Main material	Brass/glass
IP rating	IP20
Class	.
Bathroom zone	Zone 3
Voltage	230V
Driver Required	No
Cable length ( m )	.
Dimensions ( mm/ W-H-D )	100-186-100
Mounting method	CEILING bracket
Brut weight (kg)	.
Gross weight (kg)	.
Packing (mm / W-H-D)	.
Energy Efficiency %	A



## Lamp

	Included
Light source	Caret squirrel cage
Number of light sources	1
Socket Type	E27
Bulb shape	ST64
Max Lamp Length	165 mm
power consumption	7,7W
Luminous Flux	350lm
Colour Temp	2300K
CRI	>80
Lifetime	25000hrs.
Beam angle	360°

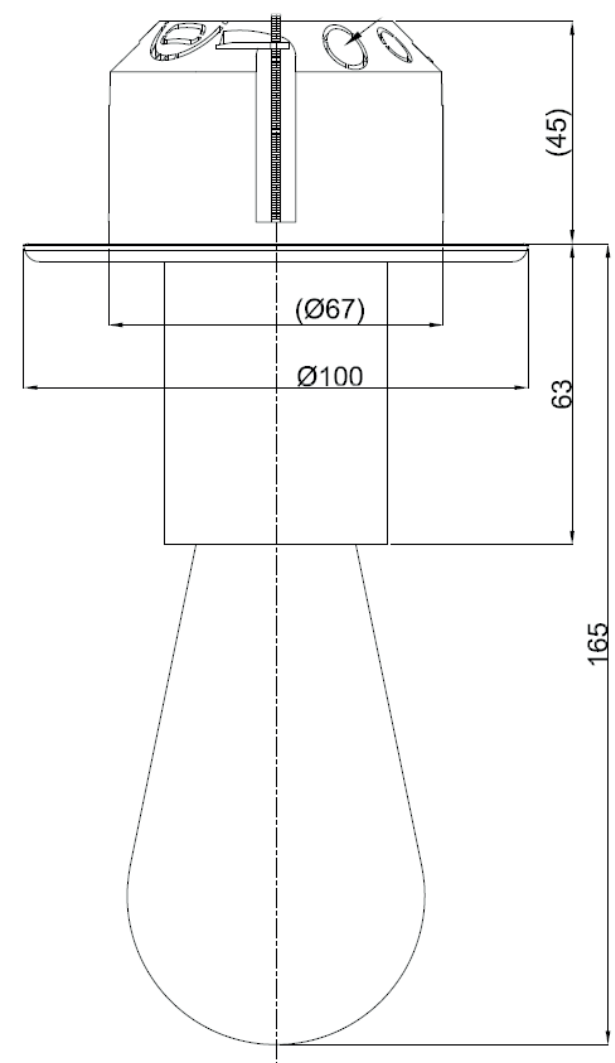

## Electrical

Switched	No
Battery	No
Dimmible	Yes
Dimming Range	See dimming list
Dimming method	Phase dimming
Supply Frequency	50/60Hz
Driver/Ballast Voltage	220-240V
Efficacy	A

## Finishes

	Dark Bronze
	Polished Chrome Plated Brass
	Brushed Nickel Plated Brass
	Brushed Chrome Plated Brass
	Polished Nickel Plated Brass

**inédit**

LIGHTING

**TEKNA**

Name **COD D-C**  
Number **N127**  
Collection **NAUTIC**


## General

Location	Indoor
Main material	Brass/glass
IP rating	IP20
Class	.
Bathroom zone	Zone 3
Voltage	230V
Driver Required	No
Cable length ( m )	.
Dimensions ( mm/ W-H-D )	104-201-104
Mounting method	CEILING bracket
Brut weight (kg)	.
Gross weight (kg)	.
Packing (mm / W-H-D )	.
Energy Efficiency %	A



## Lamp



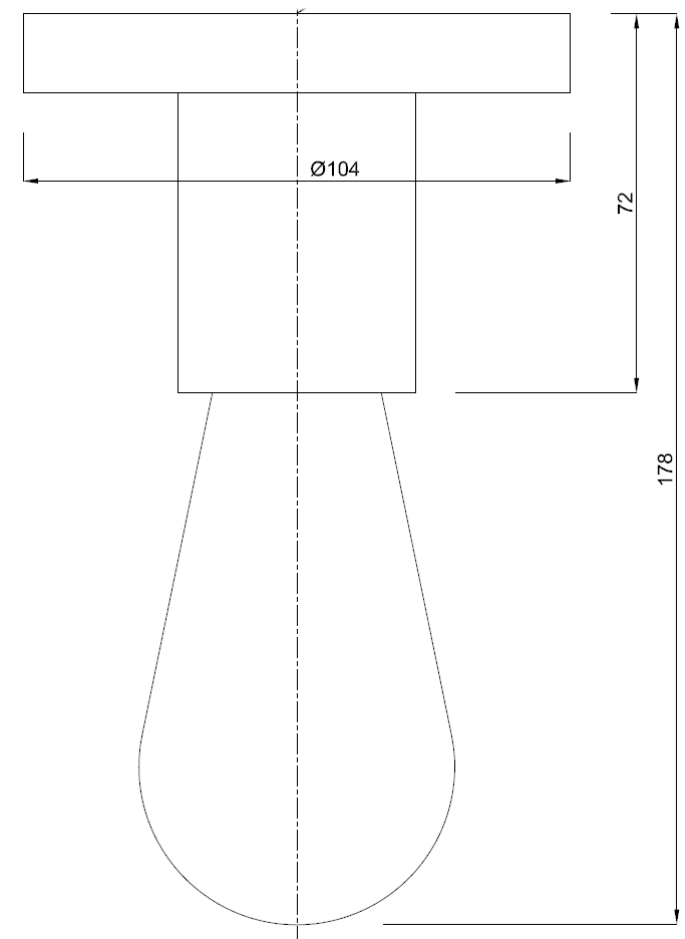

	Included
Light source	Caret squirrel cage
Number of light sources	1
Socket Type	E27
Bulb shape	ST64
Max Lamp Length	165 mm
power consumption	7,7W
Luminous Flux	350lm
Colour Temp	2300K
CRI	>80
Lifetime	25000hrs.
Beam angle	360°



## Electrical

Switched	No
Battery	No
Dimmible	Yes
Dimming Range	See dimming list
Dimming method	Phase dimming
Supply Frequency	50/60Hz
Driver/Ballast Voltage	220-240V
Efficacy	A

## Finishes

	Lacquered Black
	Lacquered White
	Lacquered Bronze
	Lacquered Custom Color