

inédit

LIGHTING

TEKNA

Name **FLATSPOT 2 GU10 - LED**  
Number **F016**  
Collection **FLATSPOT**


## General

Location Indoor  
Main material Aluminum alloy  
IP rating IP20  
Class I  
Bathroom zone Zone 3  
Voltage 230Vac  
CC 0,04A / 0,05A  
Driver Required No  
Cable length ( m ) 0,2  
Dimensions ( mm/ W-H-D ) .  
Mounting method Ceiling installation kit  
Brut weight (kg) 0.300  
Gross weight (kg) 0.200  
Packing (mm / W-H-D) 160x110x90  
Energy Efficiency % .



## Lamp

Light source Soraa retrofit led  
Number of light sources 1  
Socket Type GU10  
Bulb shape MR16  
Max Lamp Length 54,5  
power consumption 7,5W / 9,5W  
Luminous Flux 390lm / 465lm  
Colour Temp 2700k / 3000k  
CRI 95  
Lifetime 35000  
Beam angle 10° / 25° / 36° / 60°

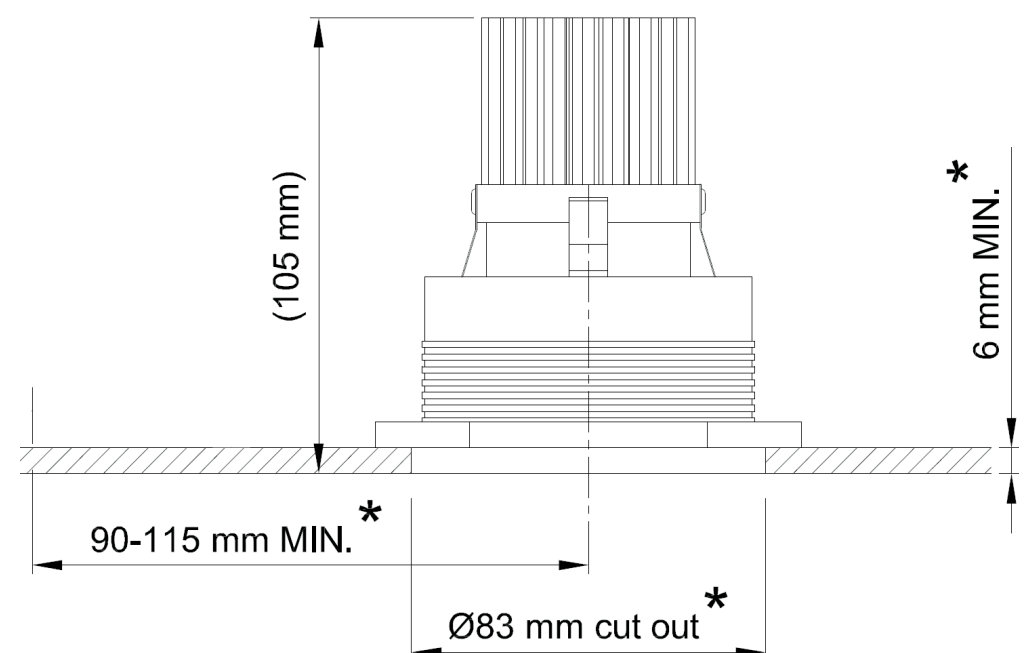

## Electrical

Switched .  
Battery No  
Dimmible Yes  
Dimming Range < 20% to 100%  
Dimming method Phase dim  
Supply Frequency 50Hz / 60Hz  
Driver/Ballast Voltage 230Vac  
Efficacy A

## Finishes

Black  
White  
Custom Color

inédit

LIGHTING

TEKNA

Name **FLATSPOT 2 TRIM CITIZEN**  
Number **F013**  
Collection **FLATSPOT**


## General

Location	Indoor
Main material	Aluminum alloy
IP rating	IP20
Class	I
Bathroom zone	Zone 3
Voltage	35Vdc
CC	350mA
Driver Required	Yes
Cable length ( m )	0,2
Dimensions ( mm / W-H-D )	.
Mounting method	Ceiling installation kit
Brut weight (kg)	0.300
Gross weight (kg)	0.200
Packing (mm / W-H-D)	160x110x90
Energy Efficiency %	.



## Lamp

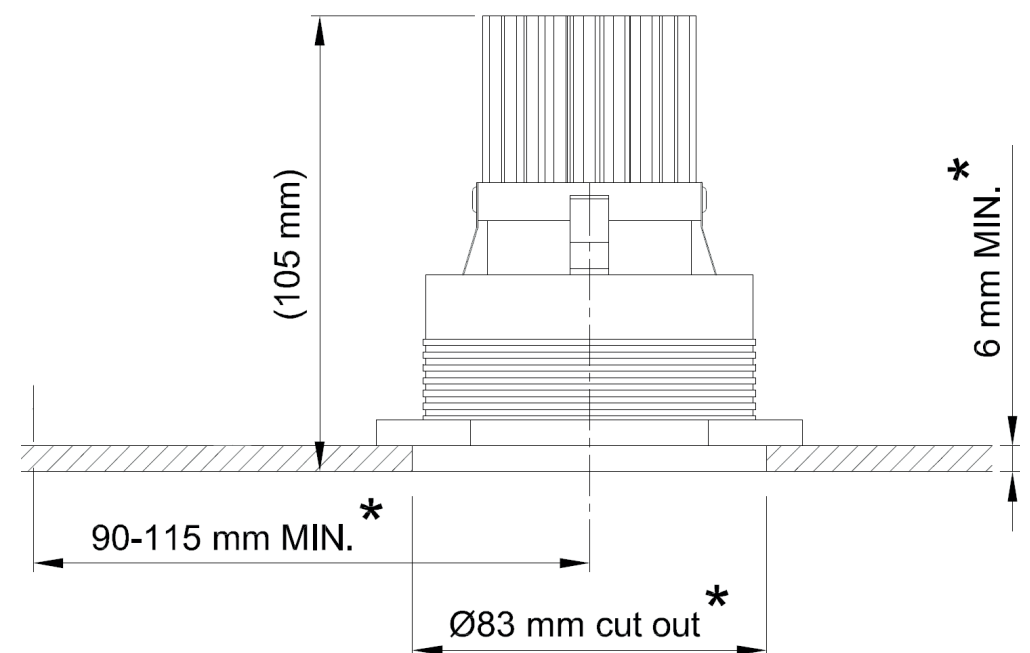


Light source	Citizen COB
Number of light sources	1
Socket Type	.
Bulb shape	Tekna led engine
Max Lamp Length	.
power consumption	12w
Luminous Flux	800
Colour Temp	2700k / 3000k
CRI	97
Lifetime	25000
Beam angle	60*



## Electrical

Switched	.
Battery	No
Dimmible	Yes
Dimming Range	Driver-dependent
Dimming method	DALI / 1-10V / Phase dim
Supply Frequency	50Hz / 60Hz
Driver/Ballast Voltage	110Vac / 230Vac / 48Vdc
Efficacy	A

## Finishes

	Black
	White
	Custom Color

inédit

LIGHTING

TEKNA

Name **FLATSPOT 2 TRIM XICATO**  
Number **f014**  
Collection **Flatspot**


## General

Location Indoor  
Main material Aluminum alloy  
IP rating IP20  
Class I  
Bathroom zone Zone 3  
Voltage 48Vdc  
CC 0,4A  
Driver Required Yes  
Cable length ( m ) 0,3  
Dimensions ( mm/ W-H-D ) .  
Mounting method Ceiling installation kit  
Brut weight (kg) 0.300  
Gross weight (kg) 0.200  
Packing (mm / W-H-D) 160x110x90  
Energy Efficiency % .



## Lamp

Light source Xicato XIM LED Module  
Number of light sources 1  
Socket Type .  
Bulb shape Tekna led engine  
Max Lamp Length .  
power consumption 20W  
Luminous Flux 850  
Colour Temp 2700k / 3000k  
CRI 97  
Lifetime 25000  
Beam angle 60°

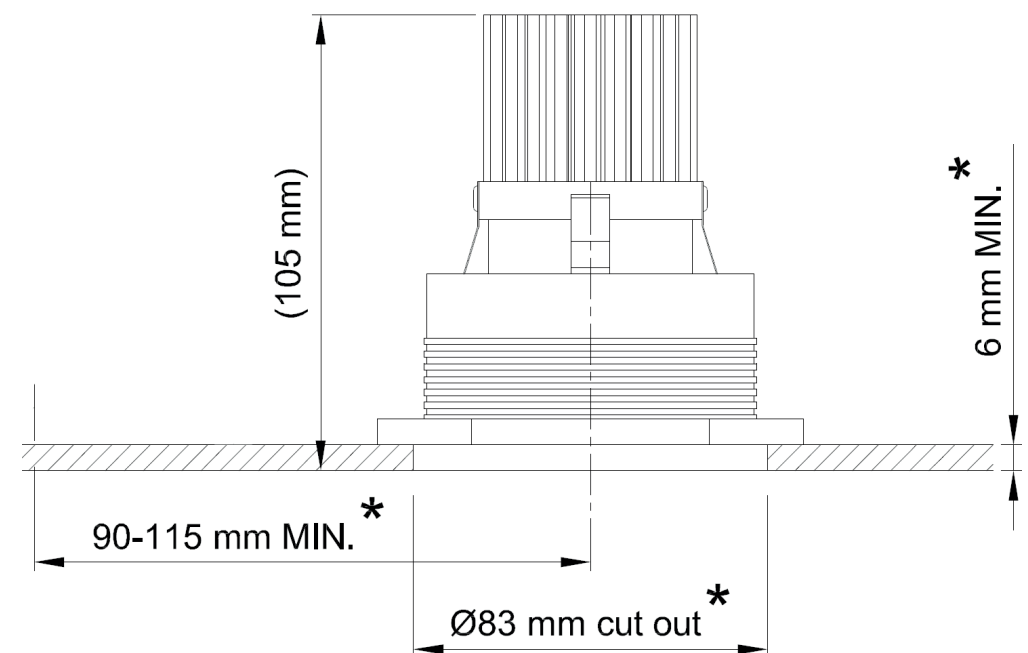

## Electrical

Switched .  
Battery No  
Dimmible Yes  
Dimming Range 0.1% to 100%  
Dimming method DALI / 1-10v  
Supply Frequency .  
Driver/Ballast Voltage 48Vdc  
Efficacy A

## Finishes

Black  
White  
Custom Color

inédit

LIGHTING

TEKNA

Name **FLATSPOT 2 TRIM 12V - LED**  
Number **F015**  
Collection **FLATSPOT**


## General

Location Indoor  
Main material Aluminum alloy  
IP rating IP20  
Class I  
Bathroom zone Zone 3  
Voltage 12V ac/dc  
CC 0,9A  
Driver Required Yes  
Cable length ( m ) 0,3  
Dimensions ( mm/ W-H-D ) .  
Mounting method Ceiling installation kit  
Brut weight (kg) 0.300  
Gross weight (kg) 0.200  
Packing (mm / W-H-D) 160x110x90  
Energy Efficiency % .



## Lamp

Light source Soraa Led  
Number of light sources 1  
Socket Type GU-5.3  
Bulb shape MR16  
Max Lamp Length 46mm  
power consumption 9W  
Luminous Flux 490lm  
Colour Temp 2700k / 3000k  
CRI 96  
Lifetime 35000  
Beam angle 25° / 36°

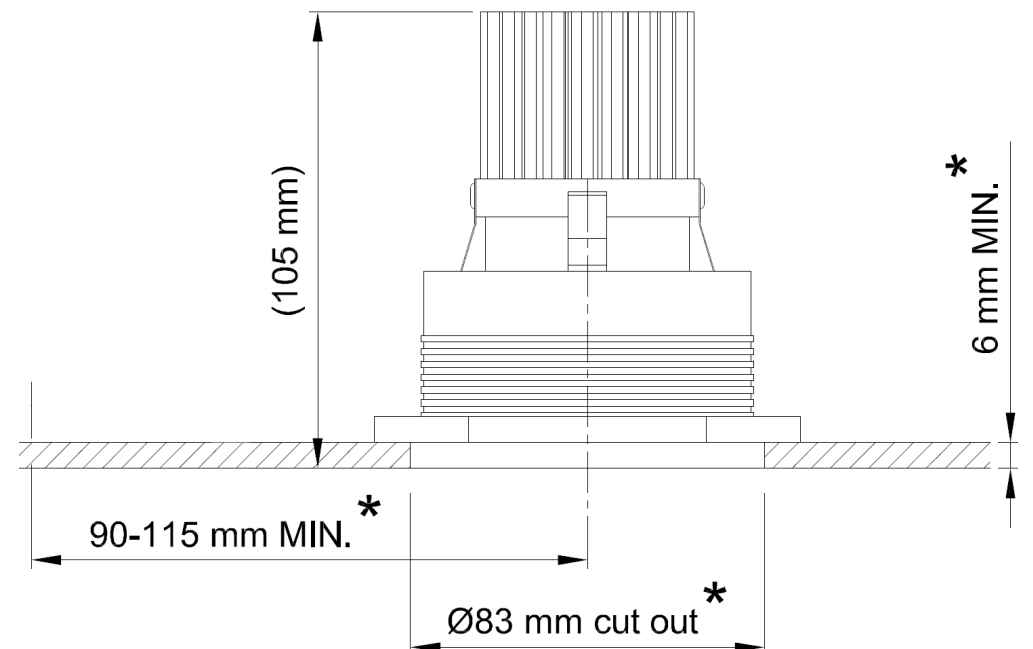

## Electrical

Switched .  
Battery No  
Dimmible Yes  
Dimming Range < 20% to 100%  
Dimming method PWM  
Supply Frequency 50Hz / 60Hz  
Driver/Ballast Voltage 12Vac  
Efficacy A

## Finishes

Black  
White  
Custom Color

inédit

LIGHTING

TEKNA

Name **FLATSPOT 2 TRIMLESS GU10 - LED**  
Number **F012**  
Collection **FLATSPOT**


## General

Location Indoor  
Main material Aluminum alloy  
IP rating IP20  
Class I  
Bathroom zone Zone 3  
Voltage 230Vac  
CC 0,04A / 0,05A  
Driver Required No  
Cable length ( m ) 0,2  
Dimensions ( mm/ W-H-D ) .  
Mounting method Ceiling installation kit  
Brut weight (kg) 0.300  
Gross weight (kg) 0.200  
Packing (mm / W-H-D) 160x110x90  
Energy Efficiency % .



## Lamp

Light source Soraa retrofit led  
Number of light sources 1  
Socket Type GU10  
Bulb shape MR16  
Max Lamp Length 54,5  
power consumption 7,5W / 9,5W  
Luminous Flux 390lm / 465lm  
Colour Temp 2700k / 3000k  
CRI 95  
Lifetime 25000  
Beam angle 10° / 25° / 36° / 60°

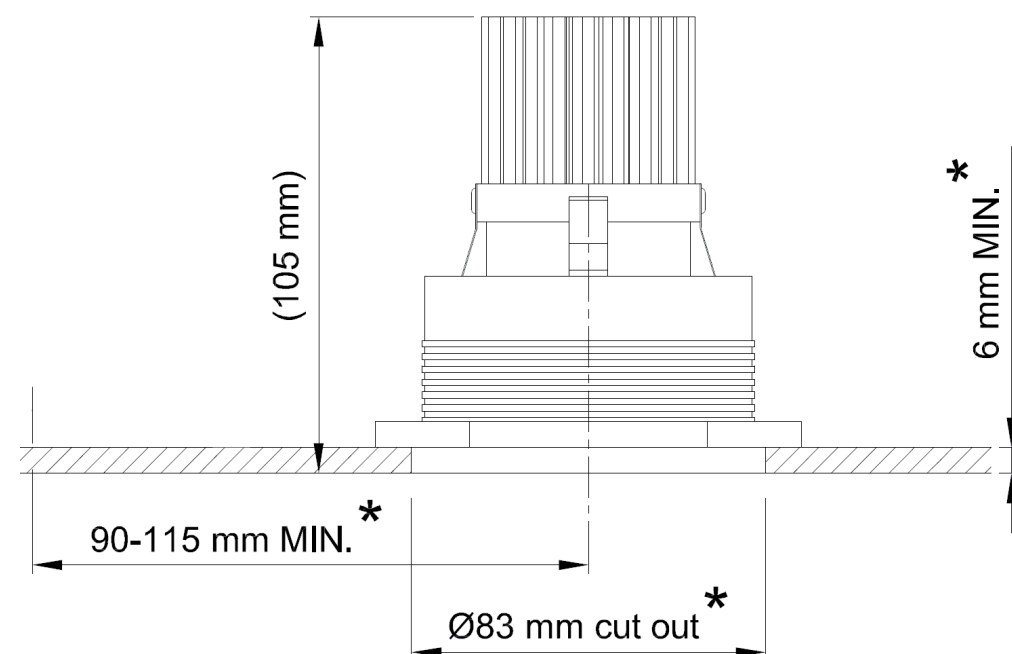

## Electrical

Switched .  
Battery No  
Dimmible Yes  
Dimming Range < 20% to 100%  
Dimming method Phase dim  
Supply Frequency 50Hz / 60Hz  
Driver/Ballast Voltage 230Vac  
Efficacy A

## Finishes

Black  
White  
Custom Color



inédit

LIGHTING

TEKNA

Name **FLATSPOT 2 TRIMLESS LED CITIZEN**  
Number **F009**  
Collection **FLATSPOT**


## General

Location Indoor  
Main material Aluminum alloy  
IP rating IP20  
Class I  
Bathroom zone Zone 3  
Voltage 35Vdc  
CC 350mA  
Driver Required Yes  
Cable length ( m ) 0,2  
Dimenstions ( mm/ W-H-D ) .  
Mounting method Ceiling installation kit  
Brut weight (kg) 0.300  
Gross weight (kg) 0.200  
Packing (mm / W-H-D) 160x110x90  
Energy Efficiency % .



## Lamp

Light source Citizen COB  
Number of light sources 1  
Soket Type .  
Bulb shape Tekna led engine  
Max Lamp Length .  
power consumption 12W  
Luminous Flux 800  
Colour Temp 2700k / 3000k  
CRI 97  
Lifetime 25000  
Beam angle 60\*

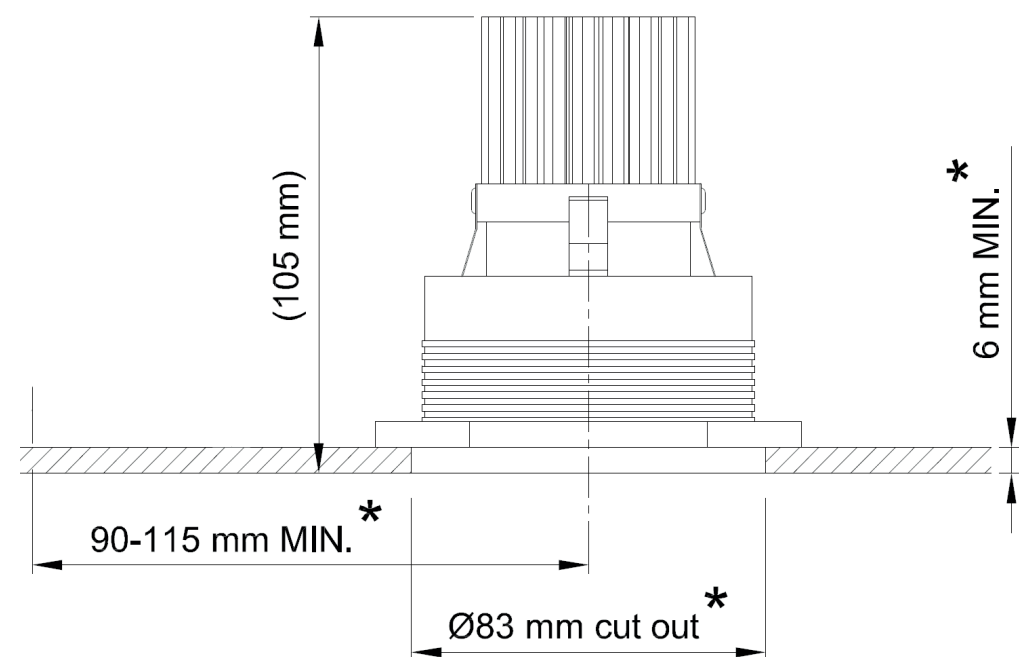

## Electrical

Switched .  
Battery No  
Dimmible Yes  
Dimming Range Driver-dependent  
Dimming method DALI / 1-10V / Phase dim  
Supply Frequency 50Hz / 60Hz  
Driver/Ballast Voltage 110Vac / 230Vac / 48Vdc  
Efficacy A

## Finishes

Black  
White  
Custom Color

**inédit**

LIGHTING

**TEKNA**

Name **FLATSPOT 2 XICATO LED**  
Number **F010**  
Collection **FLATSPOT**


## General

Location Indoor  
Main material Aluminum alloy  
IP rating IP20  
Class I  
Bathroom zone Zone 3  
Voltage 48v  
CC 0,4A  
Driver Required Yes  
Cable length ( m ) 0,2  
Dimenstions ( mm/ W-H-D ) .  
Mounting method Ceiling installation kit  
Brut weight (kg) 0.300  
Gross weight (kg) 0.200  
Packing (mm / W-H-D) 160x110x90  
Energy Efficiency % .



## Lamp

Light source Xicato XIM LED Module  
Number of light sources 1  
Soket Type .  
Bulb shape Tekna led engine  
Max Lamp Length .  
power consumption 20W  
Luminous Flux 850  
Colour Temp 2700k / 3000k  
CRI 97  
Lifetime 25000  
Beam angle 60°

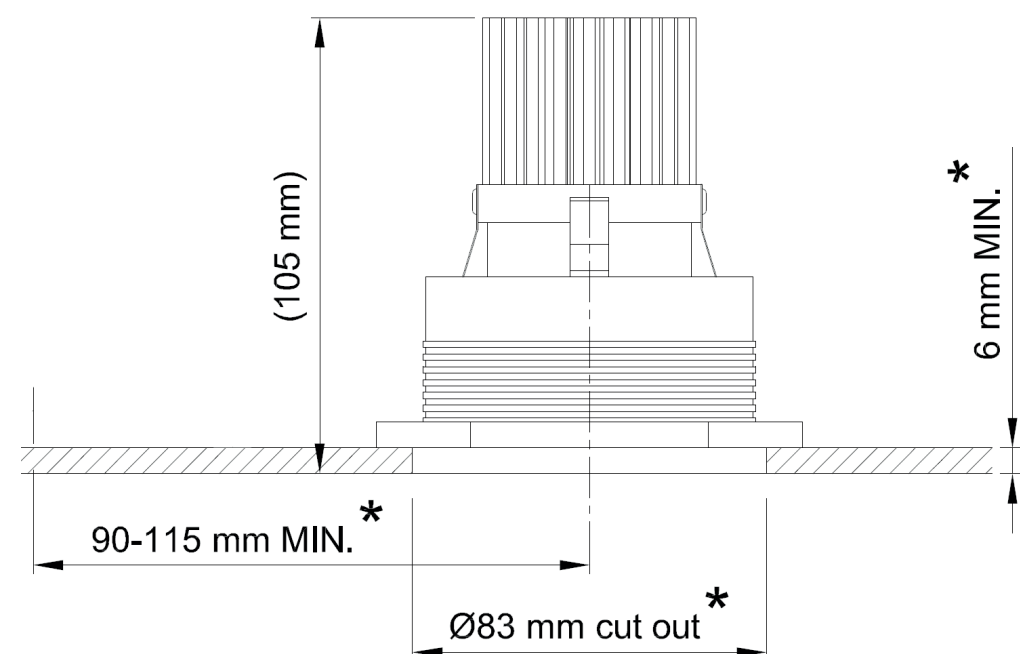

## Electrical

Switched .  
Battery No  
Dimmible Yes  
Dimming Range 0.1% to 100%  
Dimming method DALI / 1-10v  
Supply Frequency .  
Driver/Ballast Voltage 48Vdc  
Efficacy A

## Finishes

Black  
White  
Custom Color