

inédit

LIGHTING

TEKNA

Name **FLATSPOT 3 SURFACE MOUNTED LED**
Number **F020**
Collection **FLATSPOT**


General

Location	Indoor
Main material	Aluminum alloy
IP rating	IP20
Class	I
Bathroom zone	Zone 3
Voltage	28Vdc
CC	240mA
Driver Required	Yes
Cable length (m)	0,2
Dimensions (mm/ W-H-D)	.
Mounting method	Ceiling installation kit
Brut weight (kg)	0.300
Gross weight (kg)	0.200
Packing (mm / W-H-D)	160x110x90
Energy Efficiency %	.



Lamp

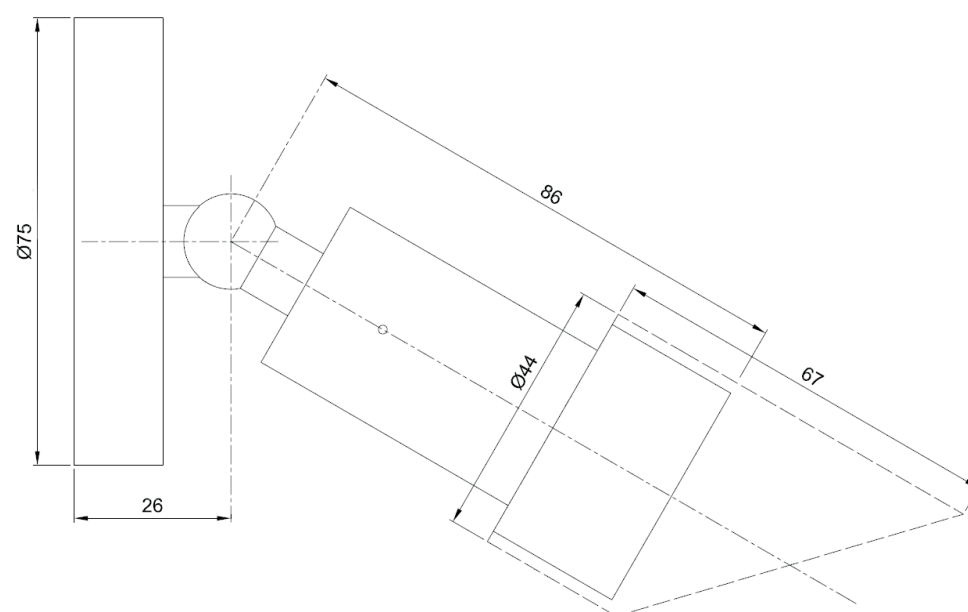


Light source	Soraa LED Licht engines
Number of light sources	1
Socket Type	.
Bulb shape	SLE-11
Max Lamp Length	.
power consumption	6,7W
Luminous Flux	405lm / 430lm
Colour Temp	2700k / 3000k
CRI	95
Lifetime	35000
Beam angle	25° / 36°



Electrical

Switched	.
Battery	No
Dimmible	Yes
Dimming Range	Driver-dependent
Dimming method	DALI / 1-10V / Phase dim
Supply Frequency	50Hz / 60Hz
Driver/Ballast Voltage	110Vac / 230Vac / 48Vdc
Efficacy	A

Finishes

	Black
	White
	Custom Color

inédit

LIGHTING

TEKNA

Name **FLATSPOT 3 TRIMLESS - LED**
Number **F018**
Collection **FLATSPOT**


General

Location	Indoor
Main material	Aluminum alloy
IP rating	IP20
Class	I
Bathroom zone	Zone 3
Voltage	28Vdc
CC	240mA
Driver Required	Yes
Cable length (m)	0,2
Dimensions (mm/ W-H-D)	.
Mounting method	Ceiling installation kit
Brut weight (kg)	0.300
Gross weight (kg)	0.200
Packing (mm / W-H-D)	160x110x90
Energy Efficiency %	.



Lamp

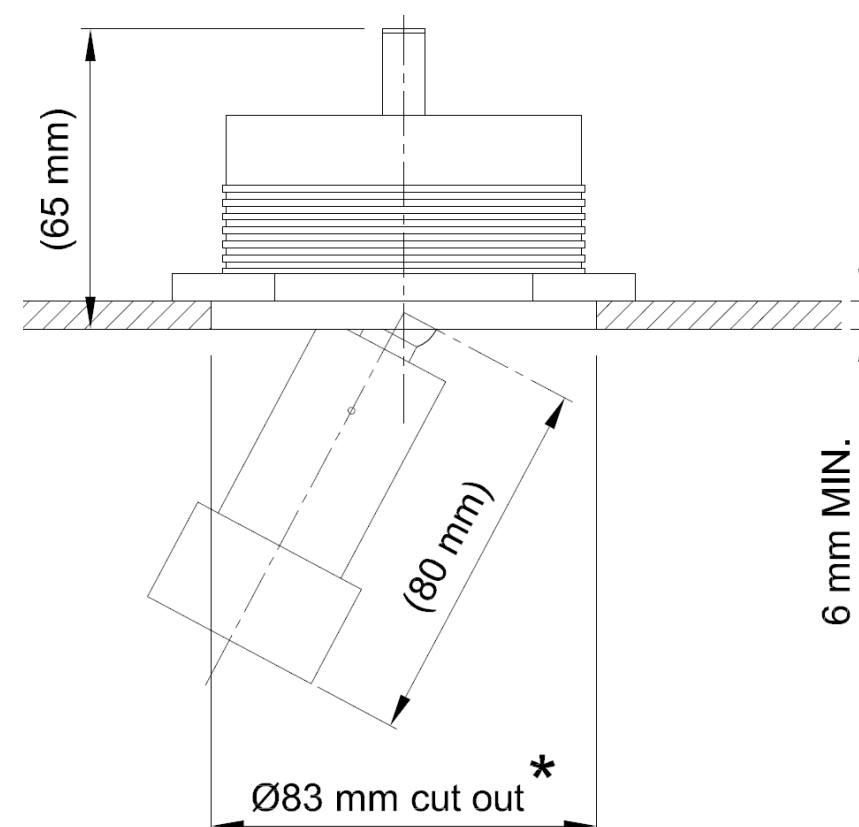


Light source	Soraa LED Licht engines
Number of light sources	1
Socket Type	.
Bulb shape	SLE-11
Max Lamp Length	.
power consumption	6,7W
Luminous Flux	405lm / 430lm
Colour Temp	2700k / 3000k
CRI	95
Lifetime	35000
Beam angle	25° / 36°



Electrical

Switched	.
Battery	No
Dimmible	Yes
Dimming Range	Driver-dependent
Dimming method	DALI / 1-10V / Phase dim
Supply Frequency	50Hz / 60Hz
Driver/Ballast Voltage	110Vac / 230Vac / 48Vdc
Efficacy	A

Finishes

	Black
	White
	Custom Color