



TEKNA

Name **FLATSPOT 6 SURFACE MOUNTED GU10 LED**
Number **F025**
Collection **FLATSPOT**

General

Location Indoor
Main material Aluminum alloy
IP rating IP20
Class I
Bathroom zone Zone 3
Voltage 230Vac
CC 0,04A / 0,05A
Driver Required No
Cable length (m) 0,2
Dimenstions (mm/ W-H-D) .
Mounting method Ceiling installation kit
Brut weight (kg) 0.600
Gross weight (kg) 0.500
Packing (mm / W-H-D) 330x100x100
Energy Efficiency % .



Lamp


Light source Soraa retrofit led
Number of light sources 1
Soket Type GU10
Bulb shape MR16
Max Lamp Length 54,5
power consumption 7,5W / 9,5W
Luminous Flux 390lm / 465lm
Colour Temp 2700k / 3000k
CRI 95
Lifetime 35000
Beam angle 10°+ snap / 25° / 36° /60°

Electrical

Switched .
Battery No
Dimmible Yes
Dimming Range < 20% to 100%
Dimming method Phase dim
Supply Frequency 50Hz / 60Hz
Driver/Ballast Voltage 230Vac
Efficacy A

Finishes

- Black
- White
- Gold Plated
- Custom Color

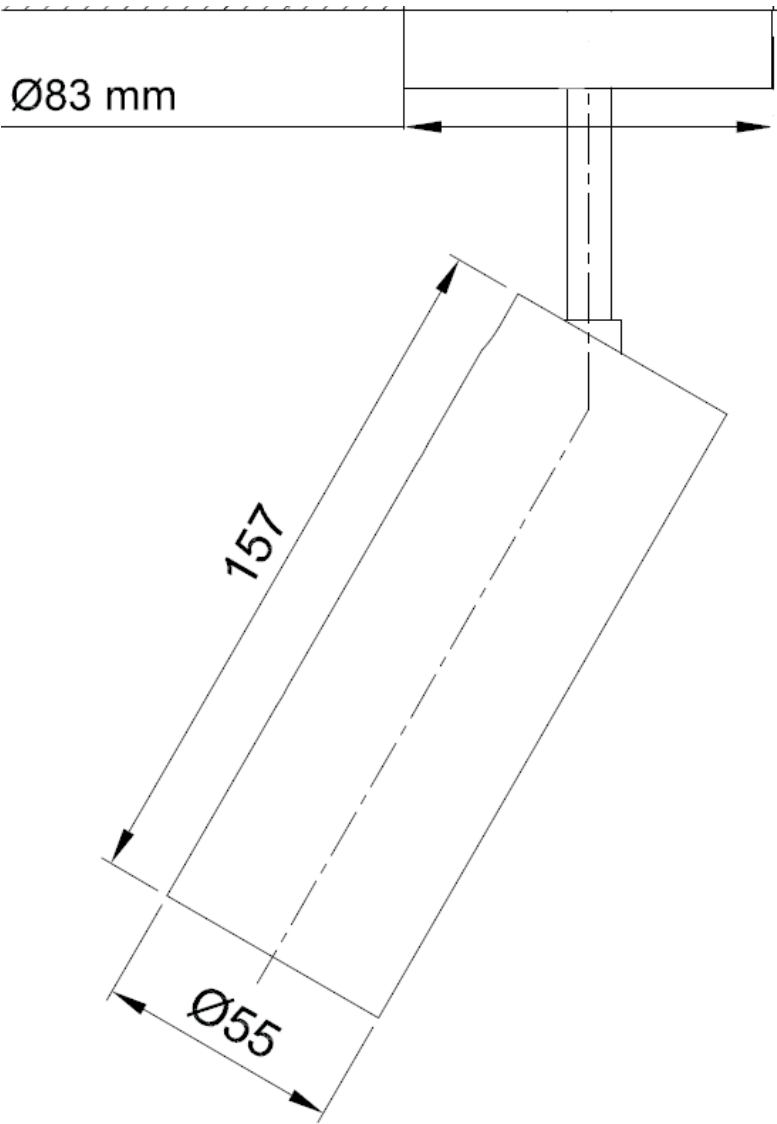



Name **FLATSPOT 6 TRIMLESS GU10 - LED**
Number **F023**
Collection **FLATSPOT**

TEKNA


General

Location	Indoor
Main material	Aluminum alloy
IP rating	IP20
Class	I
Bathroom zone	Zone 3
Voltage	230Vac
CC	0,04A / 0,05A
Driver Required	No
Cable length (m)	0,2
Dimenstions (mm/ W-H-D)	.
Mounting method	Ceiling installation kit
Brut weight (kg)	0.500
Gross weight (kg)	0.400
Packing (mm / W-H-D)	330x100x100
Energy Efficiency %	.



Lamp

Light source	Soraa retrofit led
Number of light sources	1
Soket Type	GU10
Bulb shape	MR16
Max Lamp Length	54,5
power consumption	7,5W / 9,5W
Luminous Flux	390lm / 465lm
Colour Temp	2700k / 3000k
CRI	95
Lifetime	35000
Beam angle	10°+ snap / 25° / 36° / 60°

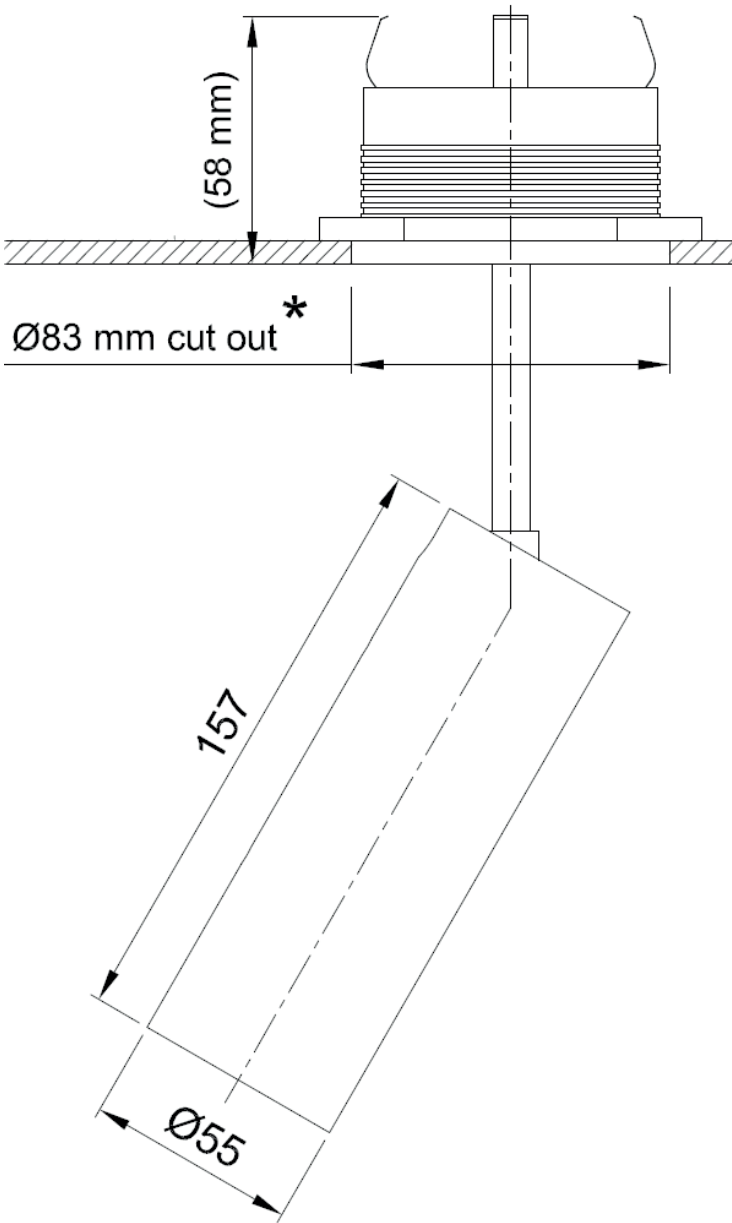

Electrical

Switched	.
Battery	No
Dimmible	Yes
Dimming Range	< 20% to 100%
Dimming method	Phase dim
Supply Frequency	50Hz / 60Hz
Driver/Ballast Voltage	230Vac
Efficacy	A

Finishes

- Black
- White
- Gold Plated
- Custom Color



TEKNA

Name **FLATSPOT 6 TRIMLESS LED**
Number **F022**
Collection **FLATSPOT**

General

Location	Indoor
Main material	Aluminum alloy
IP rating	IP20
Class	I
Bathroom zone	Zone 3
Voltage	28Vdc
CC	290mA / 440mA
Driver Required	Yes
Cable length (m)	0,2
Dimenstions (mm/ W-H-D)	.
Mounting method	Ceiling installation kit
Brut weight (kg)	0.500
Gross weight (kg)	0.400
Packing (mm / W-H-D)	330x100x100
Energy Efficiency %	.



Lamp


Light source	Soraa LED Licht engines
Number of light sources	1
Soket Type	.
Bulb shape	SLE-16
Max Lamp Length	.
power consumption	8,1W / 12,2W
Luminous Flux	435lm / 680lm
Colour Temp	2700k / 3000k
CRI	95
Lifetime	35000
Beam angle	10° + snap / 15° + snap / 25° / 36°

Electrical

Switched	.
Battery	No
Dimmible	Yes
Dimming Range	Driver-dependent
Dimming method	DALI / 1-10V / Phase dim
Supply Frequency	50Hz / 60Hz
Driver/Ballast Voltage	110Vac / 230Vac / 48Vdc
Efficacy	A

Finishes

-  Black
-  White
-  Gold Plated
-  Custom Color

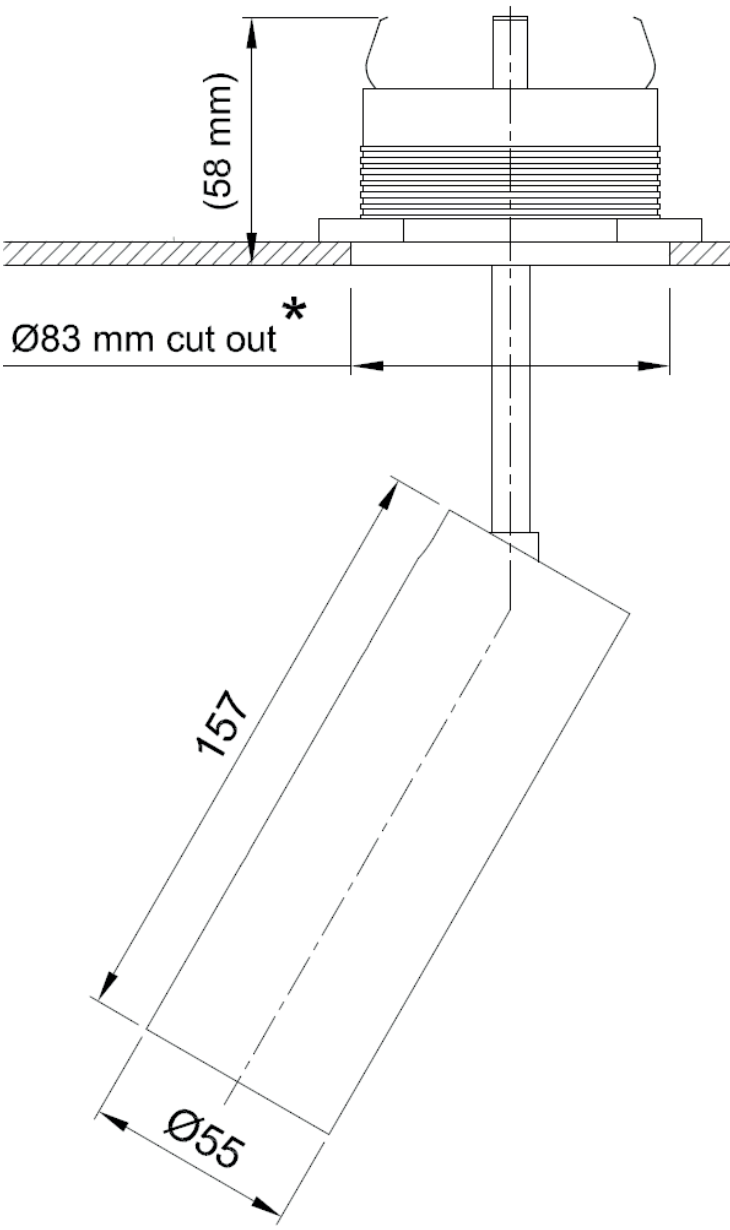



Name **FLATSPOT 6 TRIMLESS GU10 - LED**
Number **F023**
Collection **FLATSPOT**

TEKNA


General

Location Indoor
Main material Aluminum alloy
IP rating IP20
Class I
Bathroom zone Zone 3
Voltage 230Vac
CC 0,04A / 0,05A
Driver Required No
Cable length (m) 0,2
Dimenstions (mm/ W-H-D) .
Mounting method Ceiling installation kit
Brut weight (kg) 0.500
Gross weight (kg) 0.400
Packing (mm / W-H-D) 330x100x100
Energy Efficiency % .



Lamp

Light source Soraa retrofit led
Number of light sources 1
Soket Type GU10
Bulb shape MR16
Max Lamp Length 54,5
power consumption 7,5W / 9,5W
Luminous Flux 390lm / 465lm
Colour Temp 2700k / 3000k
CRI 95
Lifetime 35000
Beam angle 10°+ snap / 25° / 36° / 60°

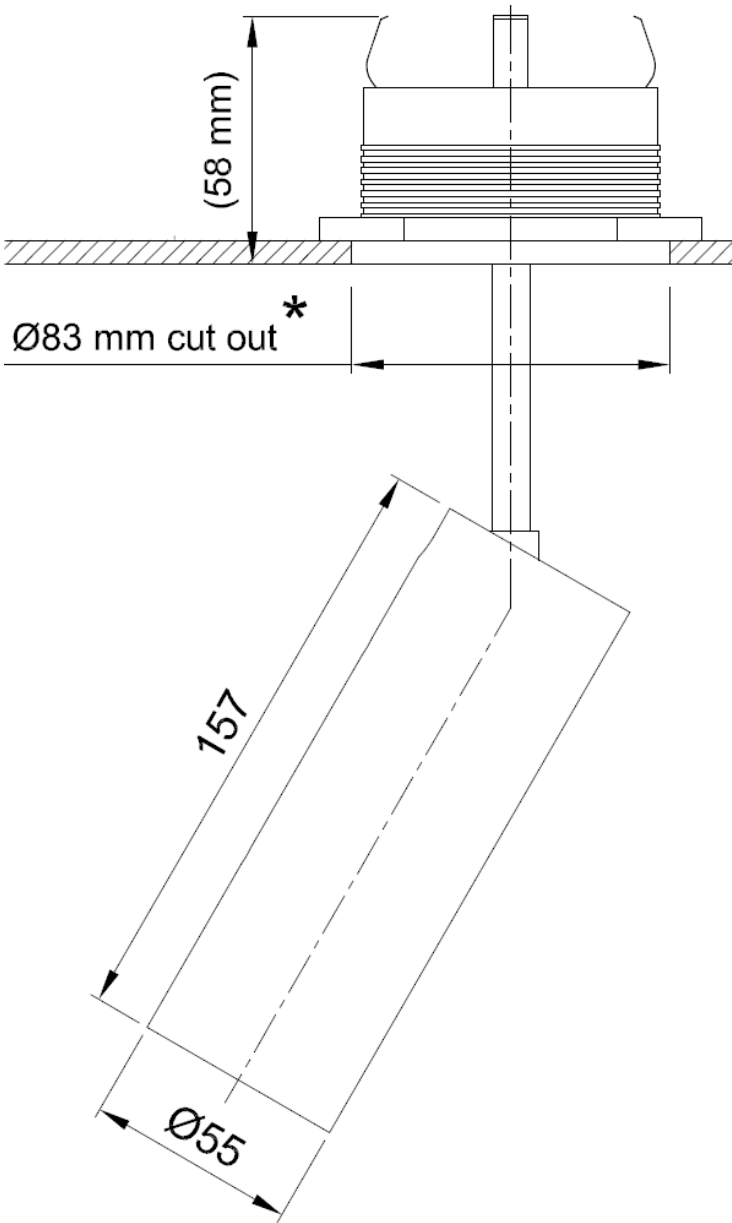

Electrical

Swiched .
Battery No
Dimmible Yes
Dimming Range < 20% to 100%
Dimming method Phase dim
Supply Frequency 50Hz / 60Hz
Driver/Ballast Voltage 230Vac
Efficacy A

Finishes

- Black
- White
- Gold Plated
- Custom Color



TEKNA

Name **FLATSPOT 6 TRIMLESS LED**
Number **F022**
Collection **FLATSPOT**

General

Location Indoor
Main material Aluminum alloy
IP rating IP20
Class I
Bathroom zone Zone 3
Voltage 28Vdc
CC 290mA / 440mA
Driver Required Yes
Cable length (m) 0,2
Dimenstions (mm/ W-H-D) .
Mounting method Ceiling installation kit
Brut weight (kg) 0.500
Gross weight (kg) 0.400
Packing (mm / W-H-D) 330x100x100
Energy Efficiency % .

Lamp

Light source Soraa LED Licht engines
Number of light sources 1
Soket Type .
Bulb shape SLE-16
Max Lamp Length .
power consumption 8,1W / 12,2W
Luminous Flux 435lm / 680lm
Colour Temp 2700k / 3000k
CRI 95
Lifetime 35000
Beam angle 10° + snap / 15° + snap / 25° / 36°

Electrical

Switched .
Battery No
Dimmible Yes
Dimming Range Driver-dependent
Dimming method DALI / 1-10V / Phase dim
Supply Frequency 50Hz / 60Hz
Driver/Ballast Voltage 110Vac / 230Vac / 48Vdc
Efficacy A

Finishes

- Black
- White
- Gold Plated
- Custom Color

