

inédit

LIGHTING

TEKNA

Name **FLATSPOT 7 SURFACE MOUNTED LED**
Number **F030**
Collection **FLATSPOT**

General

Location Indoor
Main material Aluminum alloy
IP rating IP20
Class I
Bathroom zone Zone 3
Voltage 28Vdc
CC 240mA
Driver Required Yes
Cable length (m) 0,2
Dimensions (mm/ W-H-D) .
Mounting method Ceiling installation kit
Brut weight (kg) 0.400
Gross weight (kg) 0.300
Packing (mm / W-H-D) 330x100x100
Energy Efficiency % .




Lamp


Light source Soraa LED Licht engines
Number of light sources 1
Soket Type .
Bulb shape SLE-11
Max Lamp Length .
power consumption 6,7W
Luminous Flux 405lm / 430lm
Colour Temp 2700k / 3000k
CRI 95
Lifetime 35000
Beam angle 25° / 36°

Electrical

Switched .
Battery No
Dimmible Yes
Dimming Range Driver-dependent
Dimming method DALI / 1-10V / Phase dim
Supply Frequency 50Hz / 60Hz
Driver/Ballast Voltage 110Vac / 230Vac / 48Vdc
Efficacy A

Finishes

 Black
 White
 Gold Plated
 Custom Color

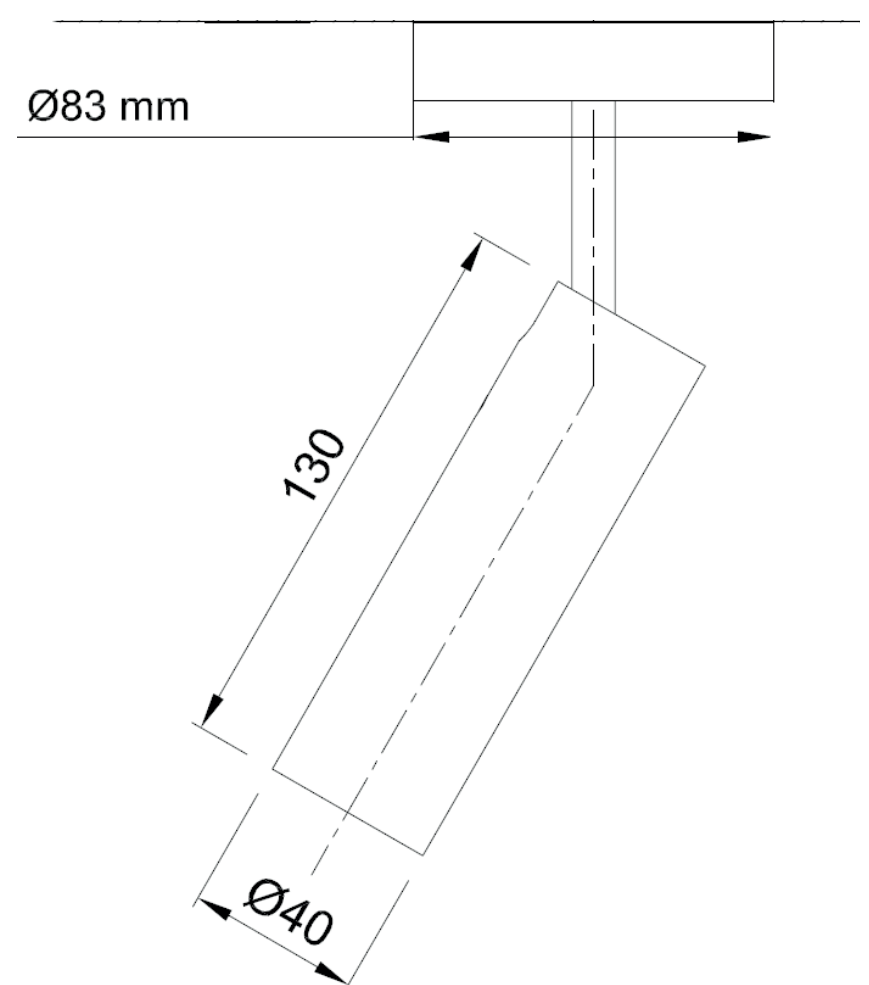

inédit

LIGHTING

TEKNA

Name **FLATSPOT 7 TRIMLESS LED**
Number **F028**
Collection **FLATSPOT**

General

Location Indoor
Main material Aluminum alloy
IP rating IP20
Class I
Bathroom zone Zone 3
Voltage 28Vdc
CC 240mA
Driver Required Yes
Cable length (m) 0,2
Dimensions (mm/ W-H-D) .
Mounting method Ceiling installation kit
Brut weight (kg) 0.400
Gross weight (kg) 0.300
Packing (mm / W-H-D) 330x100x100
Energy Efficiency % .

Lamp

Light source Soraa LED Licht engines
Number of light sources 1
Socket Type .
Bulb shape SLE-11
Max Lamp Length .
power consumption 6,7W
Luminous Flux 405lm / 430lm
Colour Temp 2700k / 3000k
CRI 95
Lifetime 35000
Beam angle 25° / 36°

Electrical

Switched .
Battery No
Dimmible Yes
Dimming Range Driver-dependent
Dimming method DALI / 1-10V / Phase dim
Supply Frequency 50Hz / 60Hz
Driver/Ballast Voltage 110Vac / 230Vac / 48Vdc
Efficacy A

Finishes

 Black
 White
 Gold Plated
 Custom Color

