

inédit

LIGHTING

TEKNA

Name **ILFORD FLOOR LARGE ON BATTERY**
Number **N106**
Collection **NAUTIC**

General

Location	Indoor/outdoor
Main material	Brass/glass
IP rating	IP 44
Class	II/III
Bathroom zone	Zone 2
Voltage	230V
Driver Required	Integrated
Cable length (m)	1,5
Dimensions (mm/ W-H-D)	W315-H540-D316
Mounting method	Floor bracket
Brut weight (kg)	9kg
Gross weight (kg)	5,5kg
Packing (mm / W-H-D)	Cardboard box 460x460x950mm
Energy Efficiency %	A



Lamp


	Included
Light source	High Power LED
Number of light sources	1
Socket Type	.
Bulb shape	COB
Max Lamp Length	.
power consumption	4w
Luminous Flux	240lm
Colour Temp	2700K
CRI	>90
Lifetime	25000hrs.
Beam angle	.

Electrical

Switched	Yes
Battery	Yes
Battery light time	11h
Battery charging time	2h
Dimmible	No
Dimming Range	.
Dimming method	.
Supply Frequency	50/60Hz
Driver/Ballast Voltage	100V-240V
Efficacy	A

Finishes

■ Dark bronze

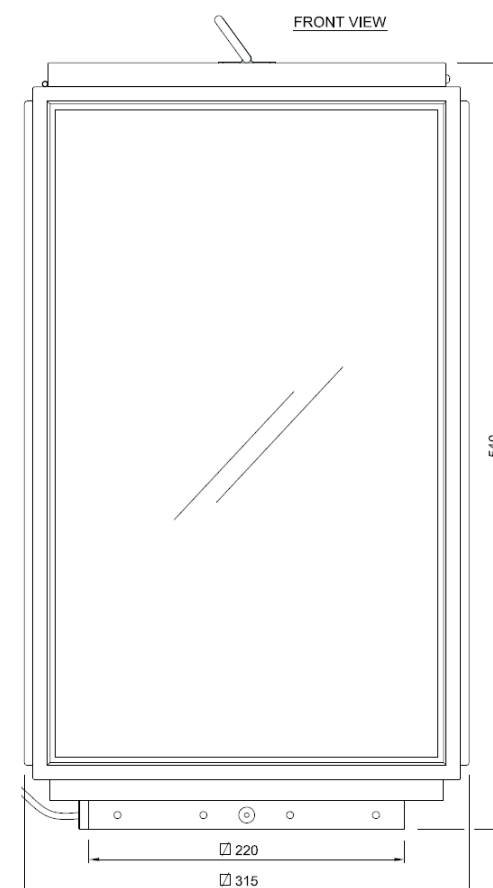

inédit

LIGHTING

TEKNA

Name **ILFORD FLOOR**
Number **N103**
Collection **NAUTIC**

General

Location Indoor/outdoor
Main material Brass/glass
IP rating IP 44
Class I
Bathroom zone Zone 3
Voltage 230V
Driver Required Integrated 1m
Cable length (m) 5 meter cable and plug
Dimensions (mm / W-H-D) W252-H480-D252
Mounting method Floor bracket
Brut weight (kg) 9kg
Gross weight (kg) 5,5kg
Packing (mm / W-H-D) Cardboard box 460x460x950mm
Energy Efficiency % A

Lamp

Included
Light source High Power LED
Number of light sources 1
Soket Type .
Bulb shape COB
Max Lamp Length .
power consumption 8W
Luminous Flux 480lm
Colour Temp 2700K
CRI >90
Lifetime 25000hrs.
Beam angle .

Electrical

Swiched No
Battery .
Dimmible No
Dimming Range .
Dimming method .
Supply Frequency 50/60Hz
Driver/Ballast Voltage 100V-240V
Efficacy A

Finishes

 Dark bronze

