

inédit

LIGHTING

TEKNA

Name **ILFORD WALL LARGE-C**
Number **N110**
Collection **NAUTIC**

General

Location	Indoor/outdoor
Main material	Brass/glass
IP rating	IP43
Class	I
Bathroom zone	Zone 3
Voltage	220-240V
Driver Required	No
Cable length (m)	
Dimensions (mm/ W-H-D)	W395-H737-D527
Mounting method	Wall bracket
Brut weight (kg)	24
Gross weight (kg)	14
Packing (mm / W-H-D)	535x535x770
Energy Efficiency %	0,78

Lamp



Light source	Included
Number of light sources	Caret squirrel cage
Socket Type	4
Bulb shape	E27
Max Lamp Length	ST64
power consumption	165 mm
Luminous Flux	7,7W
Colour Temp	350lm
CRI	2300K
Lifetime	>80
Beam angle	25000hrs.
	360°

Electrical

Switched	No
Battery	No
Dimmible	Yes
Dimming Range	See dimming list
Dimming method	Phase dimming
Supply Frequency	50/60Hz
Driver/Ballast Voltage	220-240V
Efficacy	A

Finishes

■ Dark Bronze

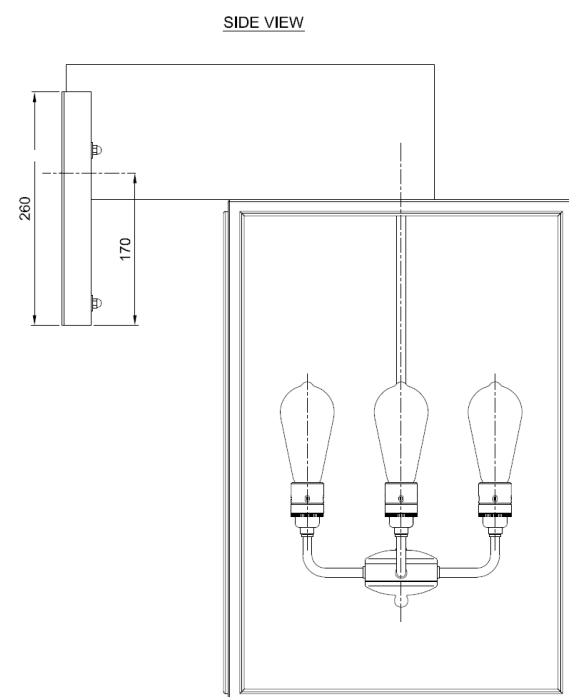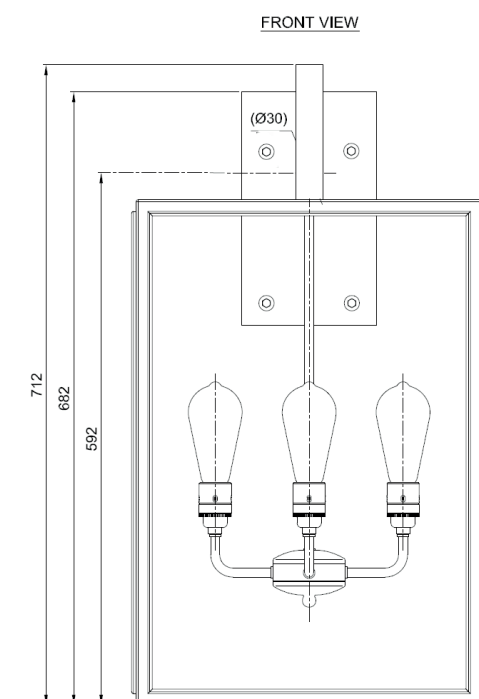

inédit

LIGHTING

TEKNA



Name **ILFORD WALL-C**
Number **N109**
Collection **NAUTIC**

General

Location Indoor
Main material Brass/glass
IP rating IP43
Class I
Bathroom zone Zone 3
Voltage 220-240V
Driver Required No
Cable length (m) Made to order
Dimensions (mm/ W-H-D) W252-H509-D338
Mounting method Wall bracket
Brut weight (kg) 7
Gross weight (kg) 5,5
Packing (mm / W-H-D) 460x460x950
Energy Efficiency % 0,78

Lamp




Light source Included
Number of light sources Caret squirrel cage
1
Socket Type E27
Bulb shape ST64
Max Lamp Length 165 mm
power consumption 7,7W
Luminous Flux 350lm
Colour Temp 2300K
CRI >80
Lifetime 25000hrs.
Beam angle 360°

Electrical

Switched No
Battery No
Dimmible Yes
Dimming Range See dimming list
Dimming method Phase dimming
Supply Frequency 50/60Hz
Driver/Ballast Voltage 220-240V
Efficacy A

Finishes

 Dark Bronze

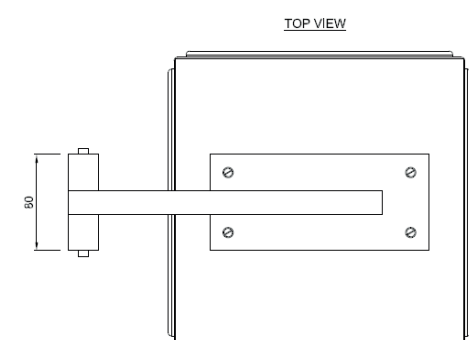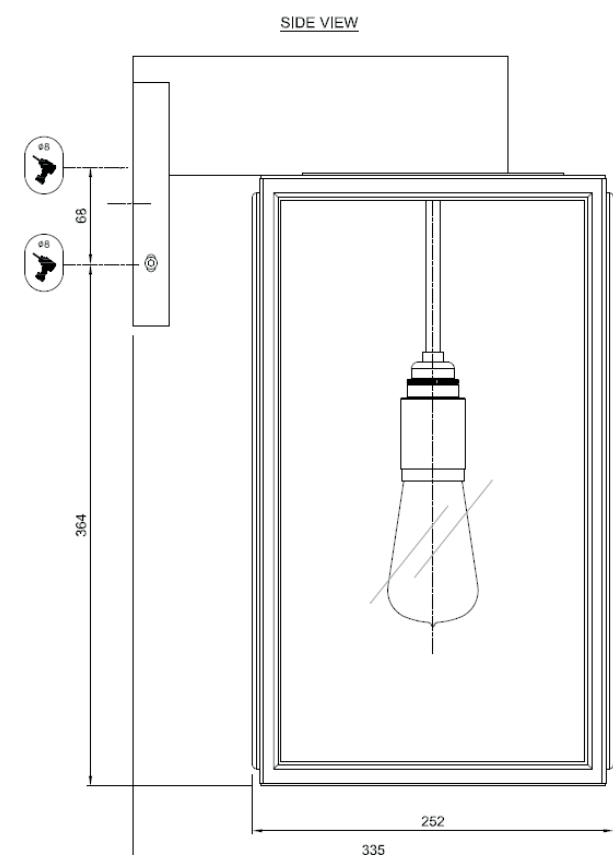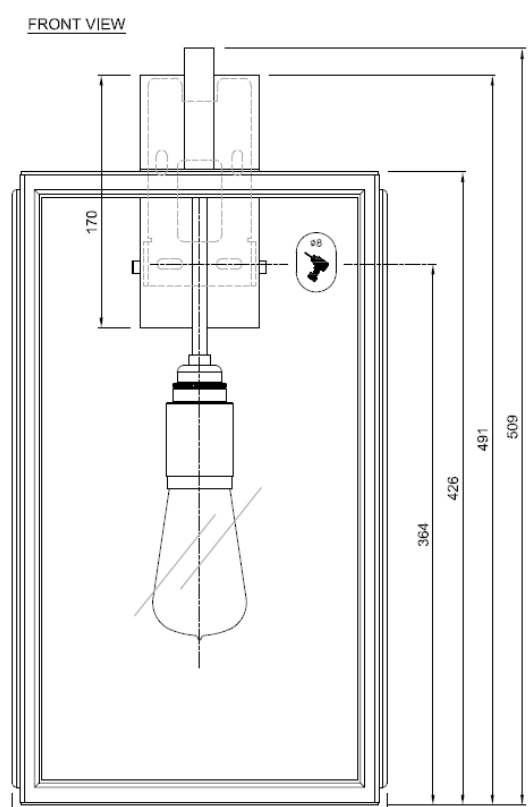

inédit

LIGHTING

TEKNA



Name **ILFORD WALL ON BRACKET 700**
Number **N004**
Collection **NAUTIC**

General

Location Indoor/outdoor
Main material Brass/glass
IP rating IP43
Class I
Bathroom zone Zone 3
Voltage 220-240V
Driver Required No
Cable length (m)
Dimensions (mm/ W-H-D) W252-H879-D453
Mounting method Wall bracket
Brut weight (kg) 20
Gross weight (kg) 14
Packing (mm / W-H-D) 460x460x1060
Energy Efficiency % 0,78

Lamp


Included
Light source Caret squirrel cage
Number of light sources 1
Socket Type E27
Bulb shape ST64
Max Lamp Length 165 mm
power consumption 7,7W
Luminous Flux 350lm
Colour Temp 2300K
CRI >80
Lifetime 25000hrs.
Beam angle 360°

Electrical


Switched No
Battery No
Dimmible Yes
Dimming Range See dimming list
Dimming method Phase dimming
Supply Frequency 50/60Hz
Driver/Ballast Voltage 220-240V
Efficacy A

Finishes


 Dark Bronze

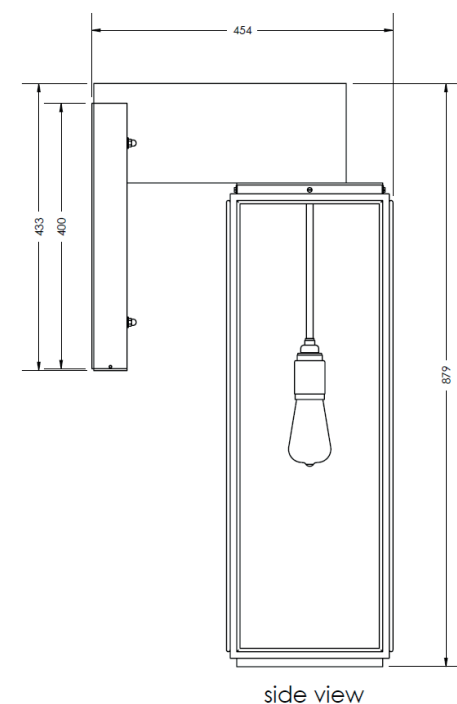

side view

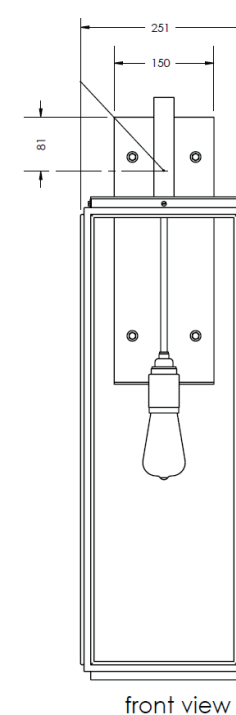

front view

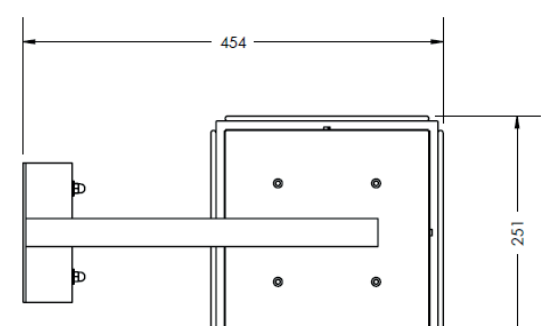

inédit

LIGHTING

TEKNA

Name **ILFORD WALL ON BRACKET 900**
Number **N005**
Collection **NAUTIC**

General

Location	Indoor
Main material	Brass/glass
IP rating	IP20
Class	I
Bathroom zone	Zone 3
Voltage	230V
Driver Required	Integrated
Cable length (m)	0,3
Dimensions (mm/ W-H-D)	W252-H1483-D453
Mounting method	Wall bracket
Brut weight (kg)	20
Gross weight (kg)	14
Packing (mm / W-H-D)	460x460x1060
Energy Efficiency %	A



Lamp


	Included
Light source	Lamp cold cathode 4x12W
Number of light sources	.
Socket Type	.
Bulb shape	.
Max Lamp Length	.
power consumption	50w
Luminous Flux	.
Colour Temp	2300K
CRI	.
Lifetime	200.000hrs.
Beam angle	.

Electrical

Switched	No
Battery	No
Dimmible	No
Dimming Range	.
Dimming method	.
Supply Frequency	50/60Hz
Driver/Ballast Voltage	110/240V
Efficacy	.

Finishes

 Dark bronze

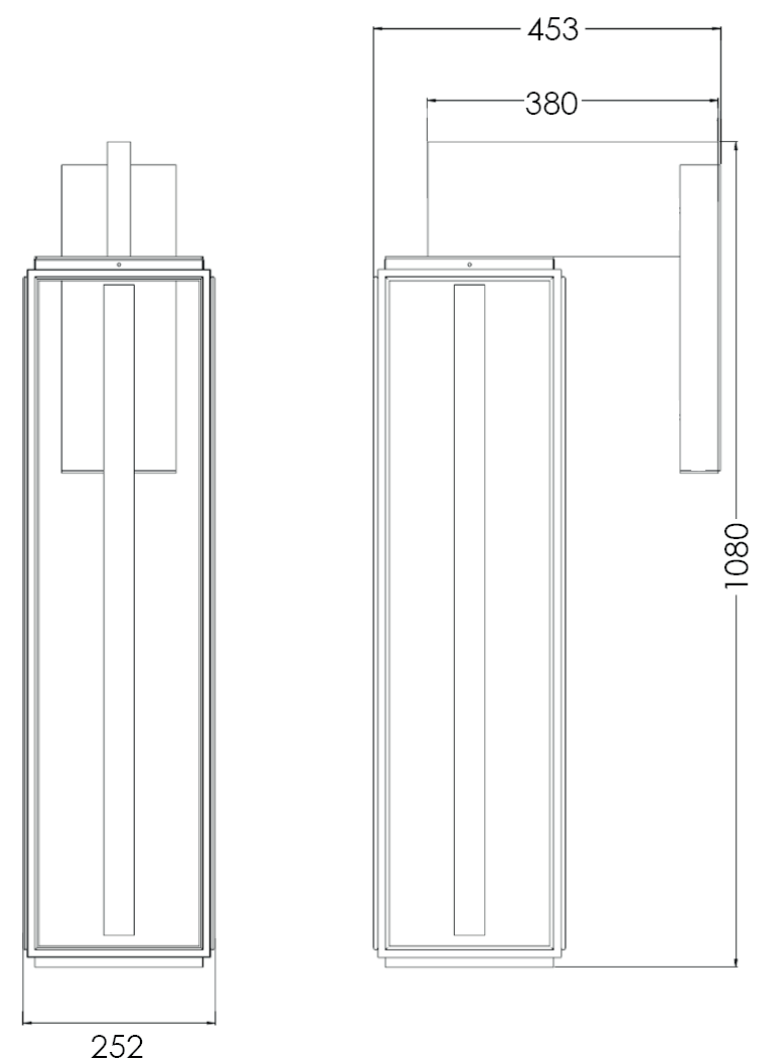

inédit

LIGHTING

TEKNA

Name **ILFORD WALL XL**
Number **N009**
Collection **NAURIC**

General

Location Indoor/outdoor
Main material Brass/glass
IP rating IP43
Class I
Bathroom zone Zone 3
Voltage 230V
Driver Required Integrated
Cable length (m) 0,3
Dimensions (mm/ W-H-D) W255-H1200-D330
Mounting method Wall bracket
Brut weight (kg) 18
Gross weight (kg) 12
Packing (mm / W-H-D) 1410x320x390
Energy Efficiency % A

Lamp

Included
Light source LED Line system
Number of light sources .
Socket Type .
Bulb shape .
Max Lamp Length .
power consumption 12w
Luminous Flux 1300Lm
Colour Temp 3000K
CRI .
Lifetime .
Beam angle .

Electrical

Switched No
Battery No
Dimmible No
Dimming Range .
Dimming method .
Supply Frequency 50/60Hz
Driver/Ballast Voltage 110/240V
Efficacy .

Finishes

 Dark bronze

