


inédit

LIGHTING


# Kalio

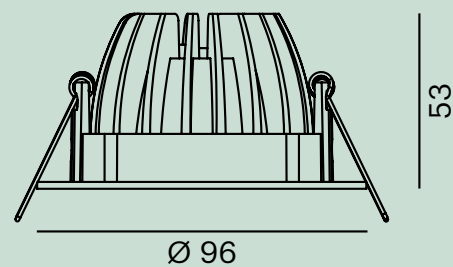

1 - 20 mm

83 mm



Ø 96 mm





## Kalio Round R

LED driver separatly order



LED · 220-240V AC · 8W · 2700K · CRI>90 · 880lm  
beam angel 24°

308-30003500   
308-30003600 



LED · 220-240V AC · 8W · 2700K · CRI>90 · 880lm  
beam angel 38°

308-30013500   
308-30013600 



LED · 220-240V AC · 8W · 3000K · CRI>90 · 880lm  
beam angel 24°

308-30009500   
308-30009600 

LED · 220-240V AC · 8W · 3000K · CRI>90 · 880lm  
beam angel 38°

308-30019500   
308-30019600 


To set accents or cover whole areas. Kalio lights up for various applications.

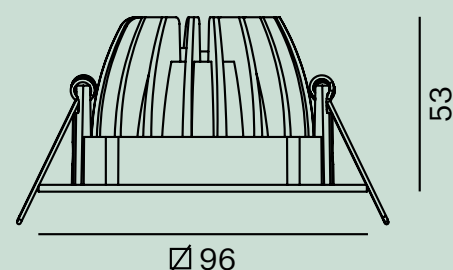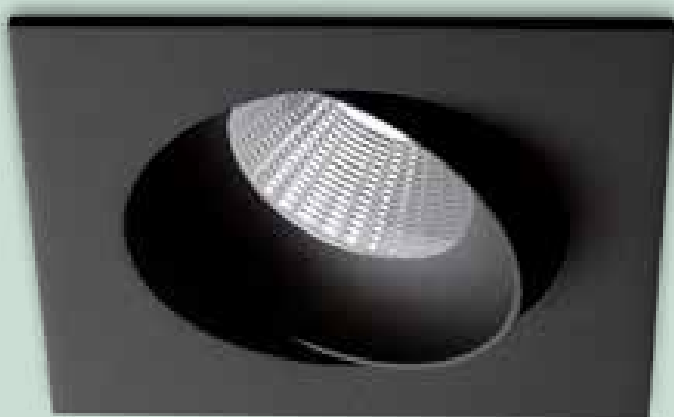

1 - 20 mm

83 mm



Ø 86x86 mm





## Kalio Square R

LED driver separatly order



LED · 220-240V AC · 8W · 2700K · CRI>90 · 880lm  
beam angel 24°

308-30023500   
308-30023600 



LED · 220-240V AC · 8W · 2700K · CRI>90 · 880lm  
beam angel 38°

308-30033500   
308-30033600 

LED · 220-240V AC · 8W · 3000K · CRI>90 · 880lm  
beam angel 24°


308-30029500   
308-30029600 

LED · 220-240V AC · 8W · 3000K · CRI>90 · 880lm  
beam angel 38°


308-30039500   
308-30039600 

## LED driver Kalio R

not dimmable · 11W · 250mA · L: 147 · B: 44 · H: 30mm

24-127570 

DALI dimmable · 12W · 250mA · L: 111 · B: 52 · H: 22mm

24-151403 

  IP 20