

inédit

LIGHTING

TEKNA

Name **LILLEY SPOT TWIN - LED**  
Number **N048**  
Collection **NAUTIC**

## General

Location Indoor  
Main material Brass  
IP rating IP20  
Class .  
Bathroom zone Zone 3  
Voltage 230V  
Driver Required Integrated  
Cable length ( m ) .  
Dimensions ( mm/ W-H-D ) 100-160-100  
Mounting method CEILING bracket  
Brut weight (kg) .  
Gross weight (kg) .  
Packing (mm / W-H-D ) .  
Energy Efficiency % A

## Lamp




Light source Spot  
Number of light sources 2  
Socket Type B15D  
Bulb shape AR70  
Max Lamp Length 48mm  
power consumption 7W  
Luminous Flux 380lm  
Colour Temp 2700K/3000K  
CRI 80  
Lifetime 35000  
Beam angle 40°

## Electrical

Switched .  
Battery No  
Dimmible .  
Dimming Range .  
Dimming method .  
Supply Frequency 50Hz  
Driver/Ballast Voltage .  
Efficacy A

## Finishes

Dark Bronze  
Polished Chrome Plated Brass  
Brushed Nickel Plated Brass  
Polished Nickel Plated Brass

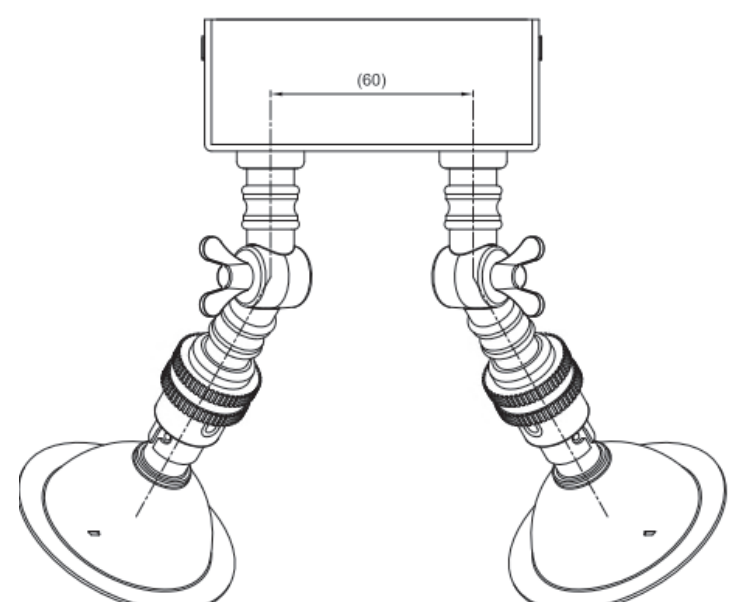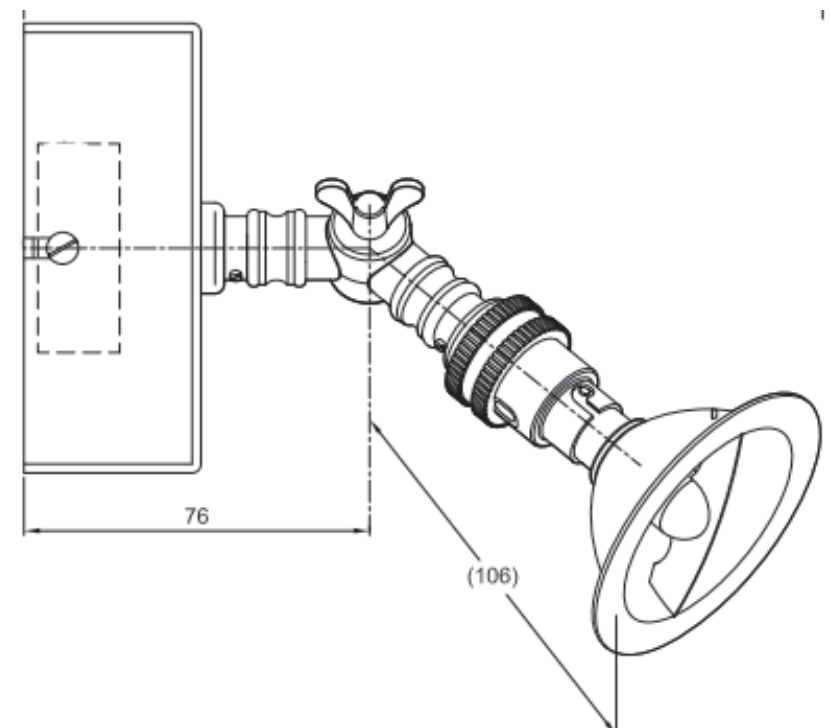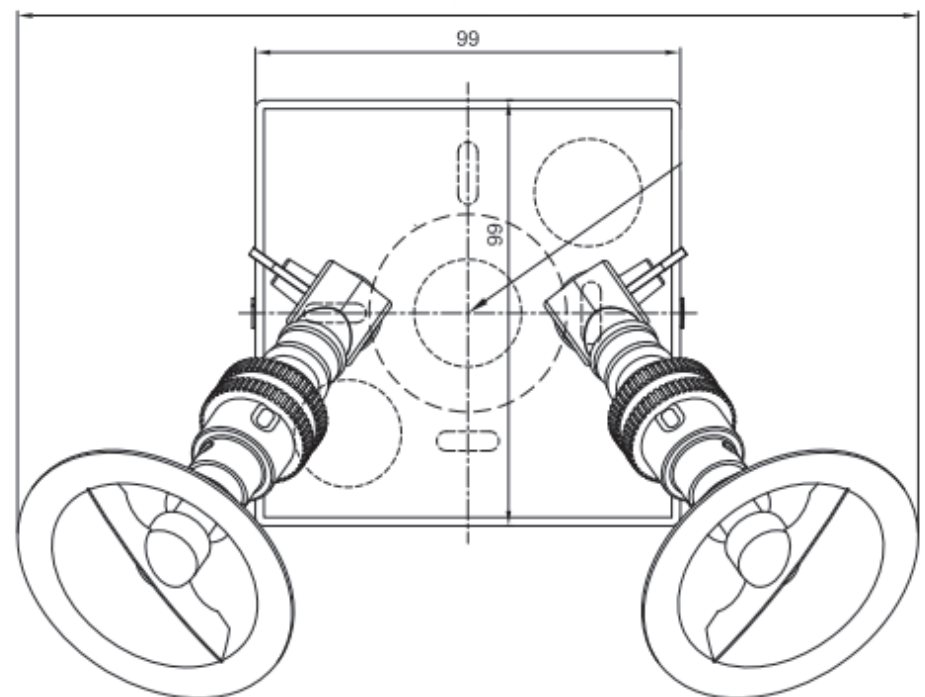

inédit

LIGHTING

TEKNA

Name **LILEY SPOT ON RAIL 6 - LED**  
Number **N056**  
Collection **NAUTIC**

## General

Location Indoor  
Main material Brass  
IP rating IP20  
Class .  
Bathroom zone Zone 3  
Voltage 230V  
Driver Required Integrated  
Cable length ( m ) .  
Dimensions ( mm/ W-H-D ) 40-160-1500  
Mounting method CEILING bracket  
Brut weight (kg) .  
Gross weight (kg) .  
Packing (mm / W-H-D) .  
Energy Efficiency % A





## Lamp



Light source Spot  
Number of light sources 6  
Socket Type B15D  
Bulb shape AR70  
Max Lamp Length 48mm  
power consumption 7W  
Luminous Flux 380lm  
Colour Temp 2700K/3000K  
CRI 80  
Lifetime 35000  
Beam angle 40°

## Electrical

Switched .  
Battery No  
Dimmible .  
Dimming Range .  
Dimming method .  
Supply Frequency 50Hz  
Driver/Ballast Voltage .  
Efficacy A

## Finishes

 Dark Bronze  
 Polished Chrome Plated Brass  
 Brushed Nickel Plated Brass  
 Polished Nickel Plated Brass

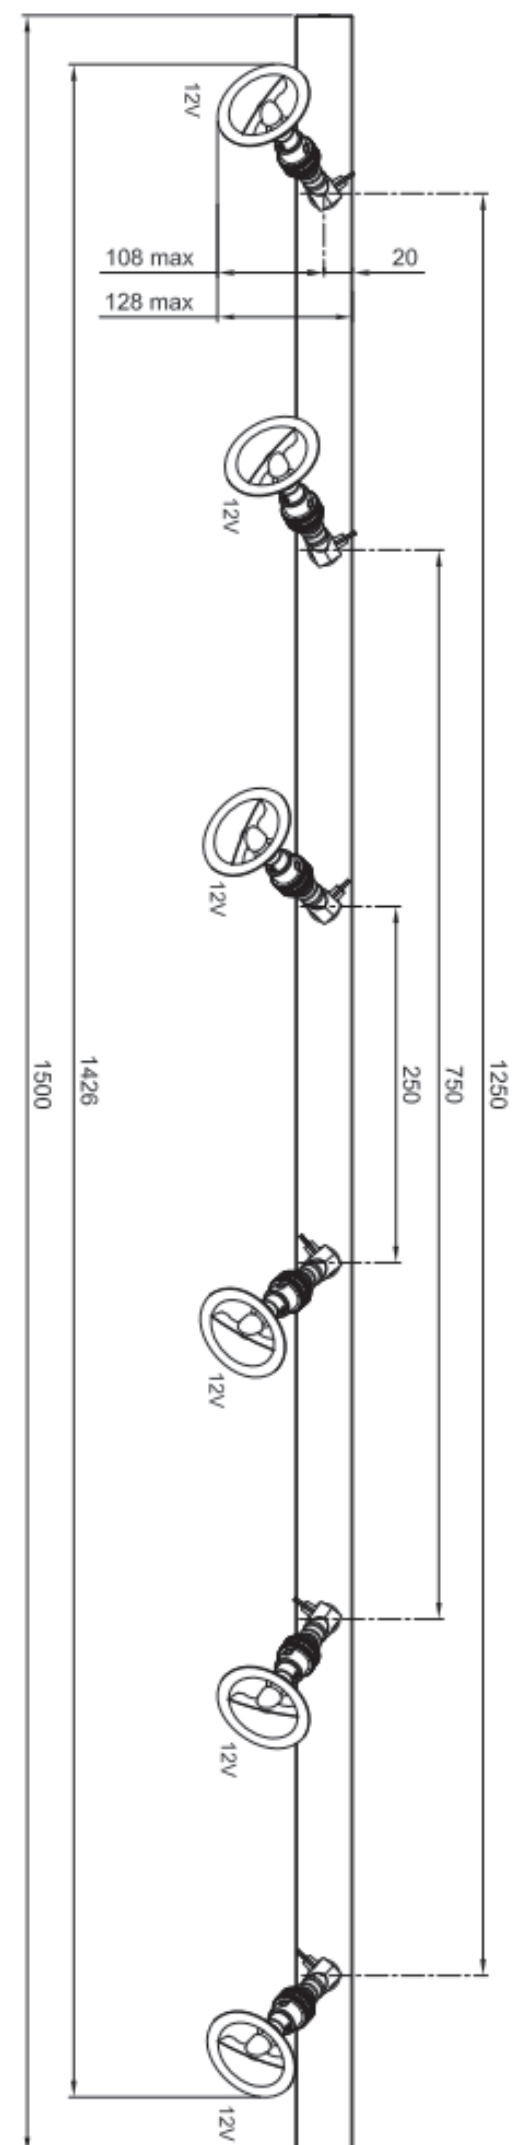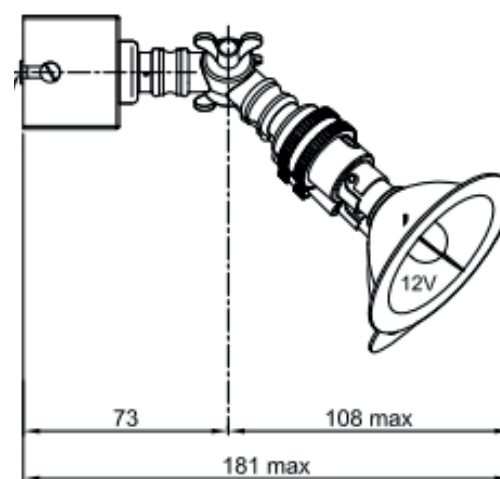

**inédit**

LIGHTING

**TEKNA**

Name **LILLEY SPOT ON RAIL 5 - LED**  
Number **N055**  
Collection **NAUTIC**

## General

Location Indoor  
Main material Brass  
IP rating IP20  
Class .  
Bathroom zone Zone 3  
Voltage 230V  
Driver Required Integrated  
Cable length ( m ) .  
Dimensions ( mm/ W-H-D ) 40-160-1200  
Mounting method CEILING bracket  
Brut weight (kg) .  
Gross weight (kg) .  
Packing (mm / W-H-D ) .  
Energy Efficiency % A



## Lamp



Light source Spot  
Number of light sources 5  
Socket Type B15D  
Bulb shape AR70  
Max Lamp Length 48mm  
power consumption 7W  
Luminous Flux 380lm  
Colour Temp 2700K/3000K  
CRI 80  
Lifetime 35000  
Beam angle 40°

## Electrical

Switched .  
Battery No  
Dimmible .  
Dimming Range .  
Dimming method .  
Supply Frequency 50Hz  
Driver/Ballast Voltage .  
Efficacy A

## Finishes

-  Dark Bronze
-  Polished Chrome Plated Brass
-  Brushed Nickel Plated Brass
-  Polished Nickel Plated Brass

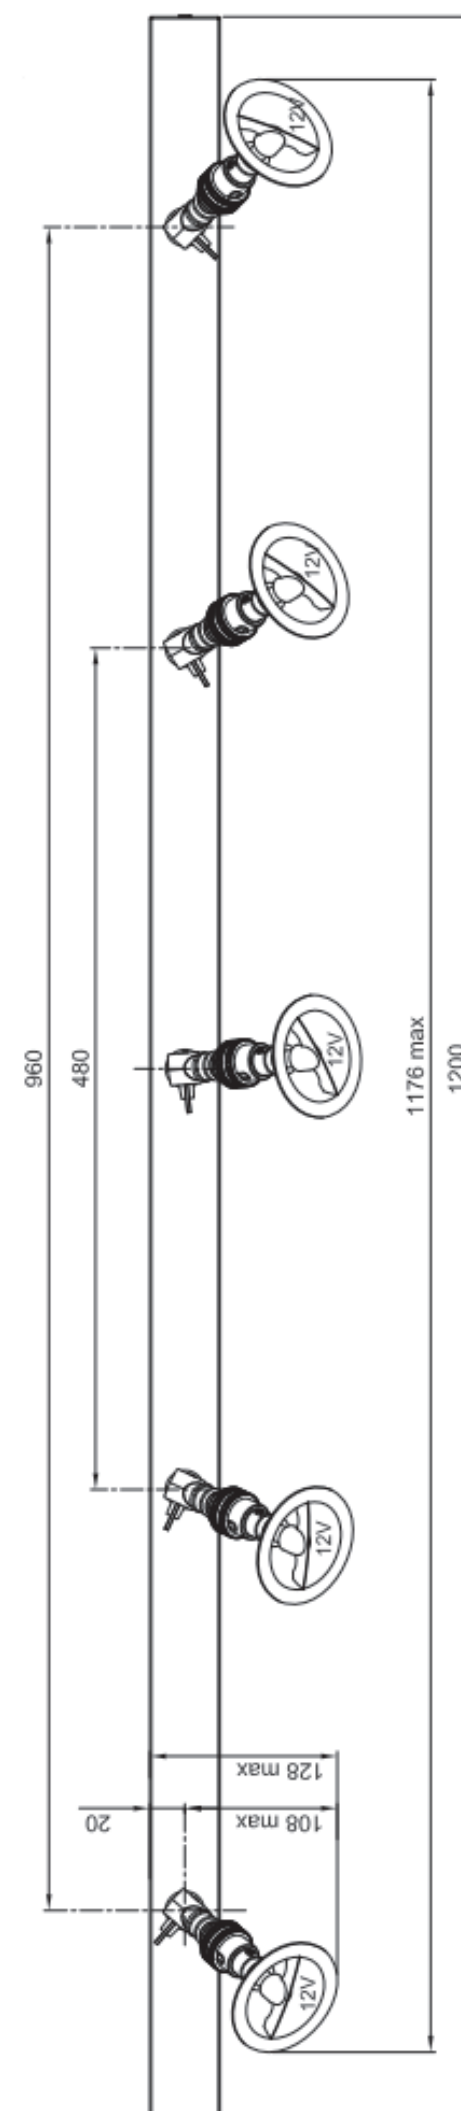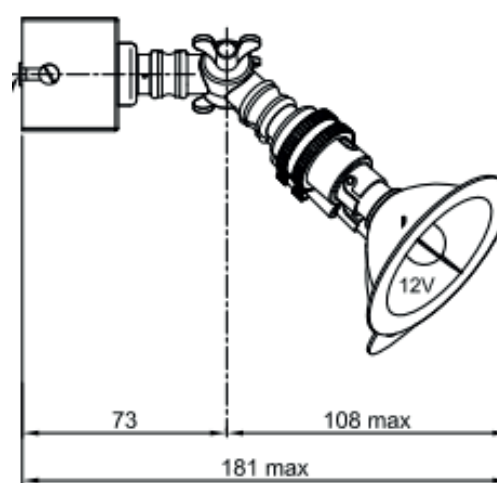

**inédit**

LIGHTING

**TEKNA**

Name **LILLEY SPOT ON RAIL 4 - LED**  
Number **N054**  
Collection **NAUTIC**

## General

Location Indoor  
Main material Brass  
IP rating IP20  
Class .  
Bathroom zone Zone 3  
Voltage 230V  
Driver Required Integrated  
Cable length ( m ) .  
Dimensions ( mm/ W-H-D ) 40-160-900  
Mounting method CEILING bracket  
Brut weight (kg) .  
Gross weight (kg) .  
Packing (mm / W-H-D ) .  
Energy Efficiency % A

## Lamp



Included  
Light source Spot  
Number of light sources 4  
Soket Type B15D  
Bulb shape AR70  
Max Lamp Length 48mm  
power consumption 7W  
Luminous Flux 380lm  
Colour Temp 2700K/3000K  
CRI 80  
Lifetime 35000  
Beam angle 40°

## Electrical

Switched .  
Battery No  
Dimmible .  
Dimming Range .  
Dimming method .  
Supply Frequency 50Hz  
Driver/Ballast Voltage .  
Efficacy A

## Finishes

■ Dark Bronze  
■ Polished Chrome Plated Brass  
■ Brushed Nickel Plated Brass  
■ Polished Nickel Plated Brass

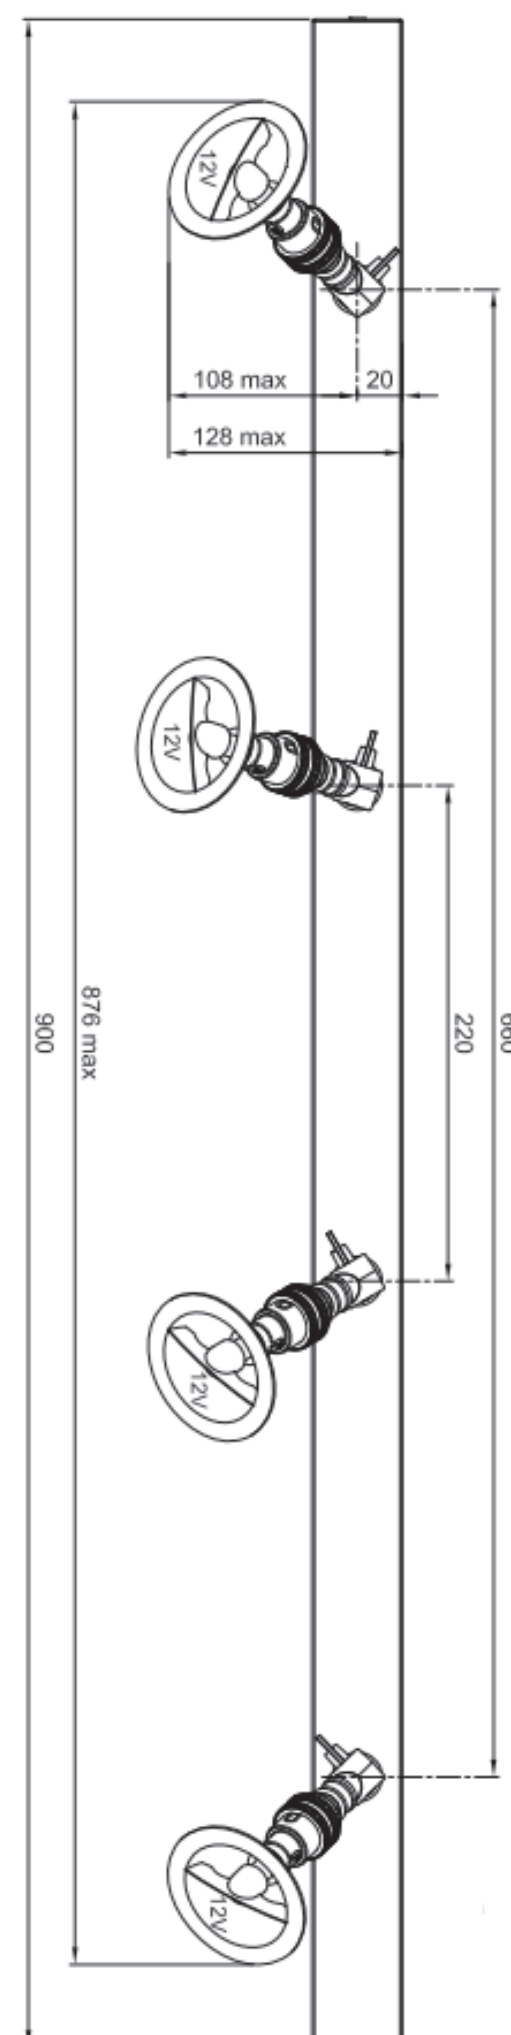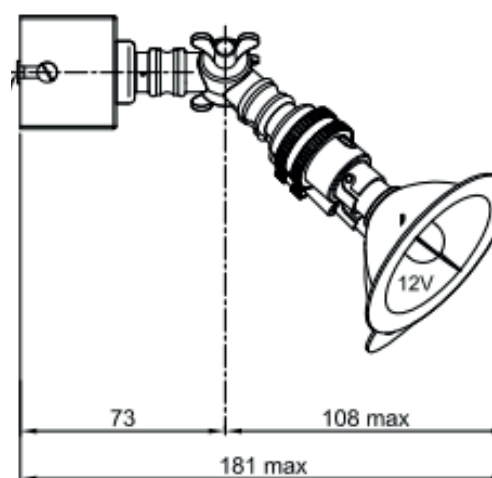



**inédit**

LIGHTING

**TEKNA**

Name **LILLEY SPOT ON RAIL 3 - LED**  
Number **N053**  
Collection **NAUTIC**



## General

Location Indoor  
Main material Brass  
IP rating IP20  
Class .  
Bathroom zone Zone 3  
Voltage 230V  
Driver Required Integrated  
Cable length ( m ) .  
Dimensions ( mm/ W-H-D ) 40-160-600  
Mounting method CEILING bracket  
Brut weight (kg) .  
Gross weight (kg) .  
Packing (mm / W-H-D) .  
Energy Efficiency % A



## Lamp

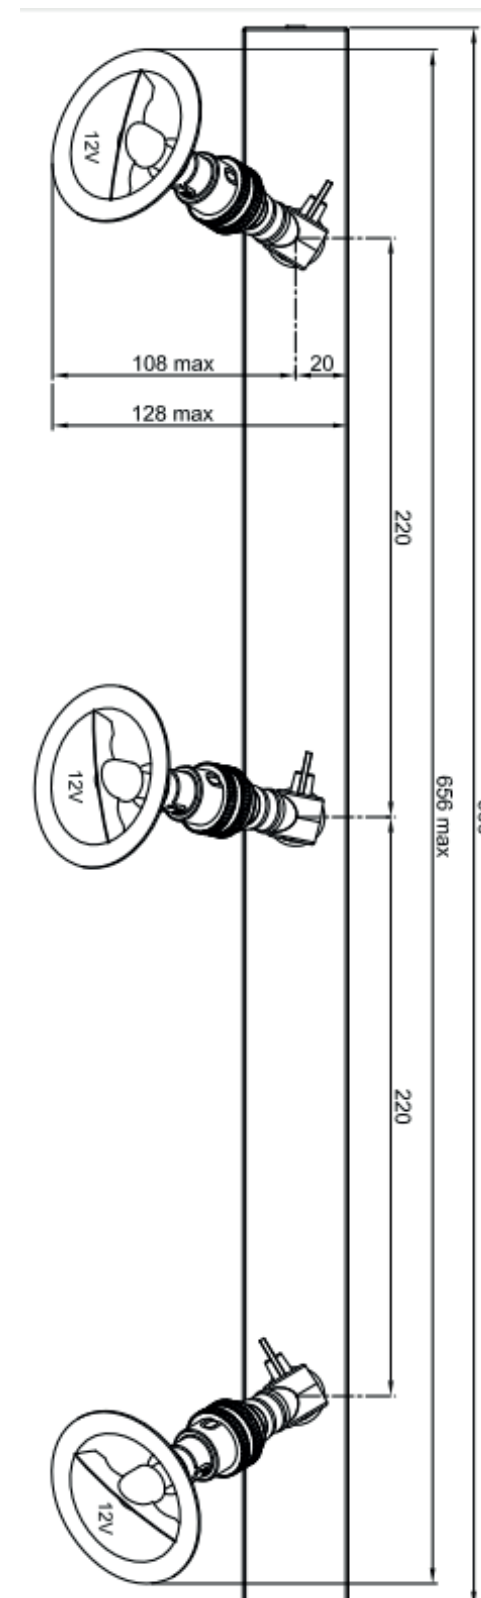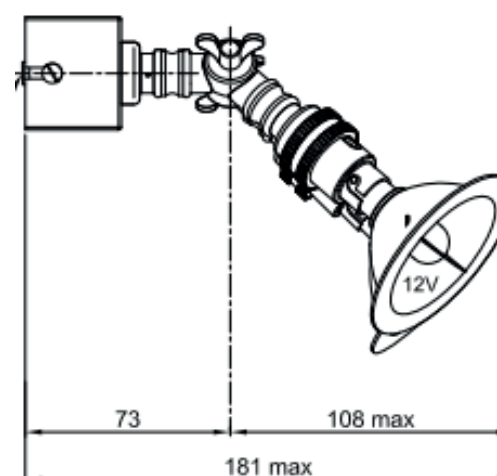

Light source Spot  
Number of light sources 3  
Soket Type B15D  
Bulb shape AR70  
Max Lamp Length 48mm  
power consumption 7W  
Luminous Flux 380lm  
Colour Temp 2700K/3000K  
CRI 80  
Lifetime 35000  
Beam angle 40°



## Electrical

Swiched .  
Battery No  
Dimmible .  
Dimming Range .  
Dimming method .  
Supply Frequency 50Hz  
Driver/Ballast Voltage .  
Efficacy A

## Finishes

 Dark Bronze  
 Polished Chrome Plated Brass  
 Brushed Nickel Plated Brass  
 Polished Nickel Plated Brass

inédit

LIGHTING

TEKNA

Name **LILLEY SPOT ON RAIL 2 - LED**  
Number **N052**  
Collection **NAUTIC**

## General

Location Indoor  
Main material Brass  
IP rating IP20  
Class .  
Bathroom zone Zone 3  
Voltage 230V  
Driver Required Integrated  
Cable length ( m ) .  
Dimensions ( mm/ W-H-D ) 40-160-300  
Mounting method CEILING bracket  
Brut weight (kg) .  
Gross weight (kg) .  
Packing (mm / W-H-D ) .  
Energy Efficiency % A



## Lamp





Light source Spot  
Number of light sources 2  
Socket Type B15D  
Bulb shape AR70  
Max Lamp Length 48mm  
power consumption 7W  
Luminous Flux 380lm  
Colour Temp 2700K/3000K  
CRI 80  
Lifetime 35000  
Beam angle 40°


Included

## Electrical

Switched .  
Battery No  
Dimmible .  
Dimming Range .  
Dimming method .  
Supply Frequency 50Hz  
Driver/Ballast Voltage .  
Efficacy A

## Finishes

-  Dark Bronze
-  Polished Chrome Plated Brass
-  Brushed Nickel Plated Brass
-  Polished Nickel Plated Brass

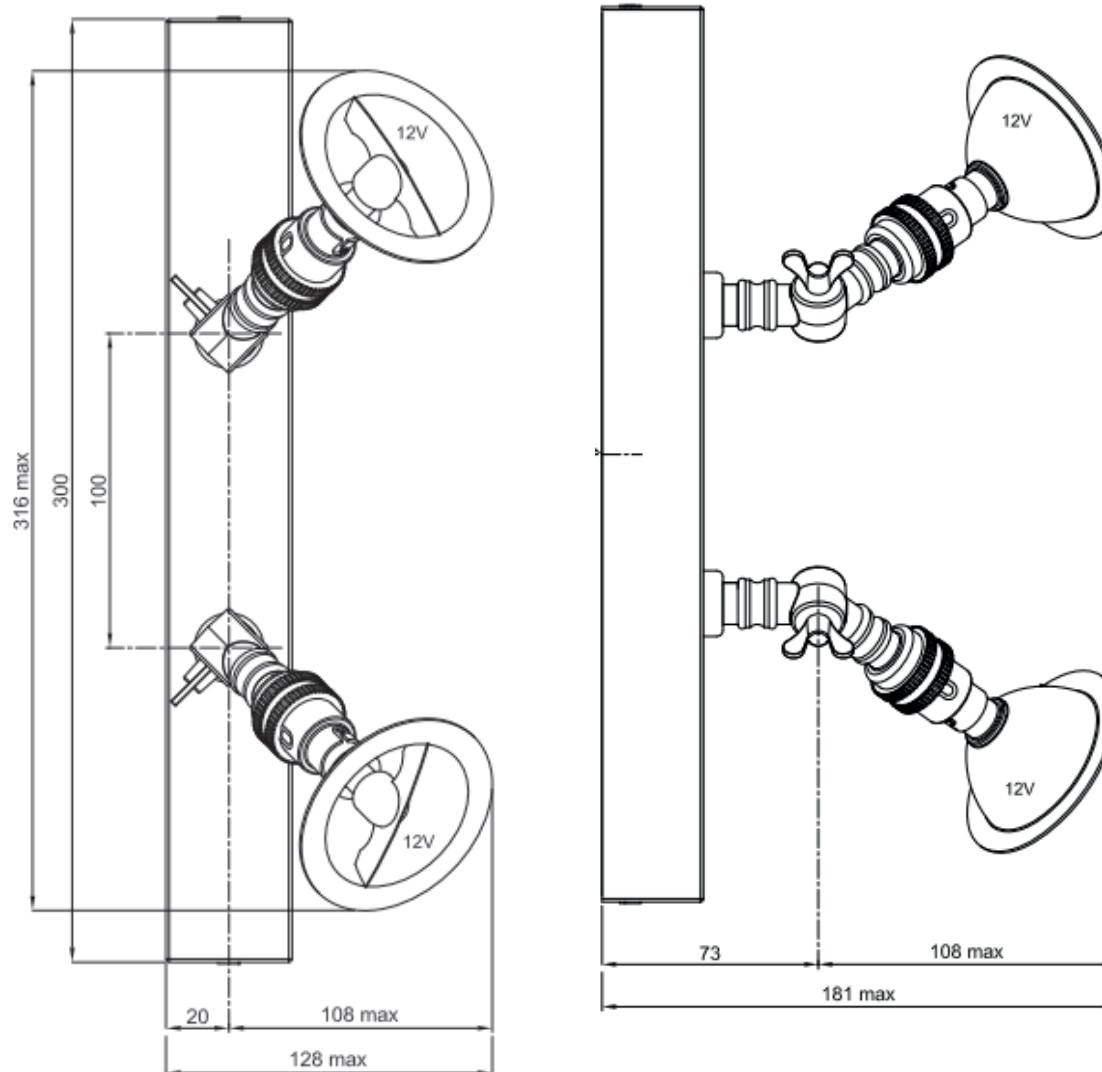

inédit

LIGHTING

TEKNA

Name **LILLEY SPOT ON BOX**  
Number **N035**  
Collection **NAUTIC**




## General

Location Indoor  
Main material Brass  
IP rating IP20  
Class .  
Bathroom zone Zone 3  
Voltage 230V  
Driver Required Integrated  
Cable length ( m ) .  
Dimensions ( mm/ W-H-D ) 90-185-90  
Mounting method CEILING bracket  
Brut weight (kg) .  
Gross weight (kg) .  
Packing (mm / W-H-D ) .  
Energy Efficiency % A

## Lamp

Included  
Light source Spot  
Number of light sources 1  
Socket Type B15D  
Bulb shape AR70  
Max Lamp Length 48mm  
power consumption 7W  
Luminous Flux 380lm  
Colour Temp 2700K/3000K  
CRI 80  
Lifetime 35000  
Beam angle 40°

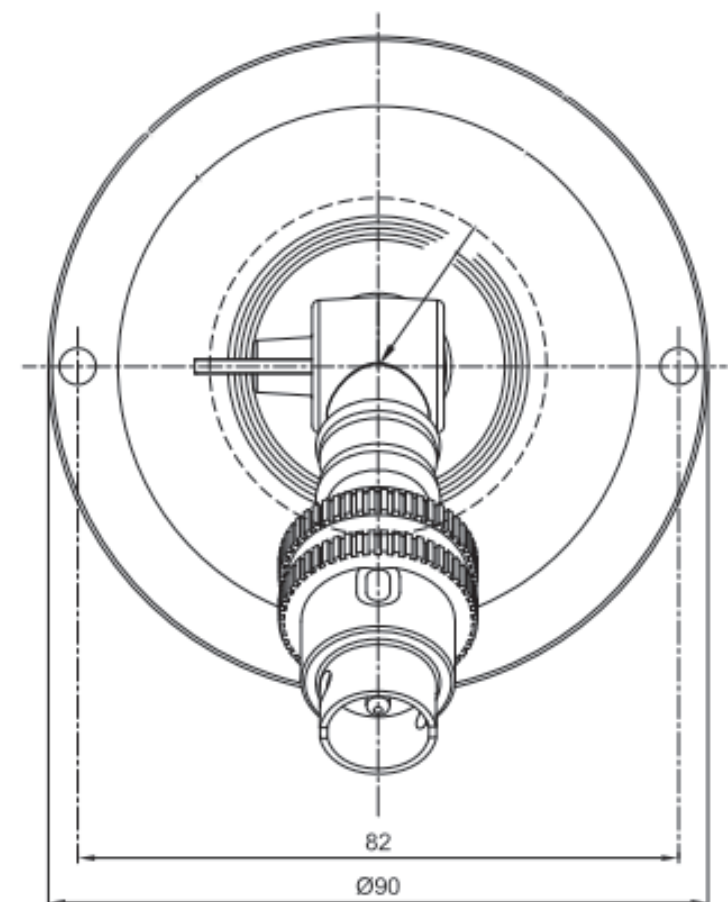


## Electrical

Switched .  
Battery No  
Dimmible .  
Dimming Range .  
Dimming method .  
Supply Frequency 50Hz  
Driver/Ballast Voltage .  
Efficacy A

## Finishes

■ Dark Bronze  
■ Polished Chrome Plated Brass  
■ Brushed Nickel Plated Brass  
■ Polished Nickel Plated Brass

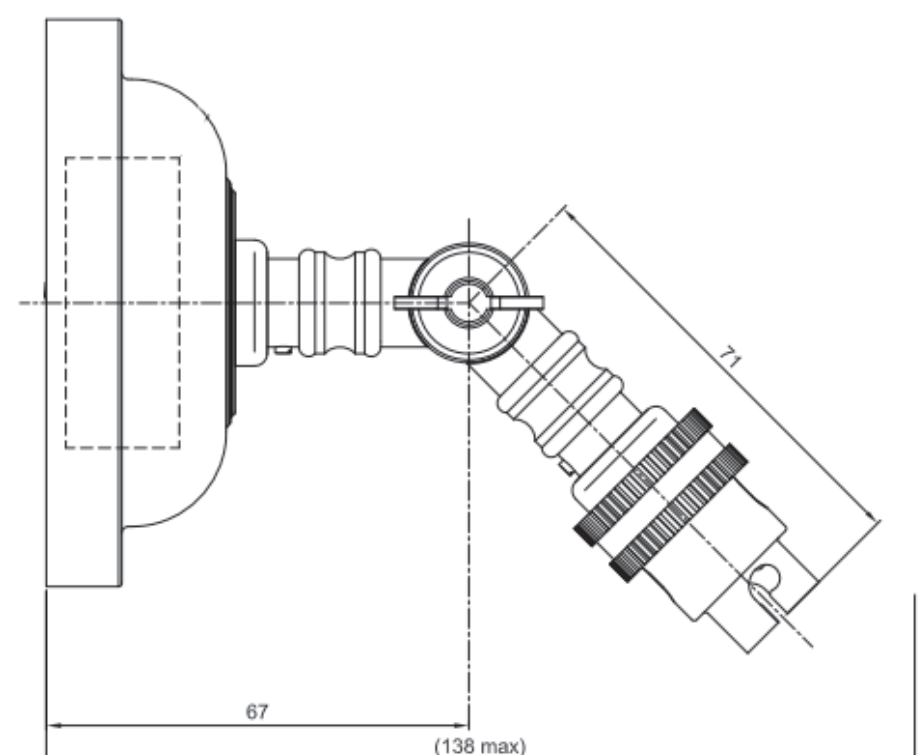

inédit

LIGHTING

TEKNA

Name **LILLEY SPOT - LED**  
Number **N032**  
Collection **NAUTIC**


## General

|                          |                 |
|--------------------------|-----------------|
| Location                 | Indoor          |
| Main material            | Brass           |
| IP rating                | IP20            |
| Class                    | .               |
| Bathroom zone            | Zone 3          |
| Voltage                  | 230V            |
| Driver Required          | Integrated      |
| Cable length ( m )       | .               |
| Dimensions ( mm/ W-H-D ) | 66-160-66       |
| Mounting method          | CEILING bracket |
| Brut weight (kg)         | .               |
| Gross weight (kg)        | .               |
| Packing (mm / W-H-D )    | .               |
| Energy Efficiency %      | A               |



## Lamp



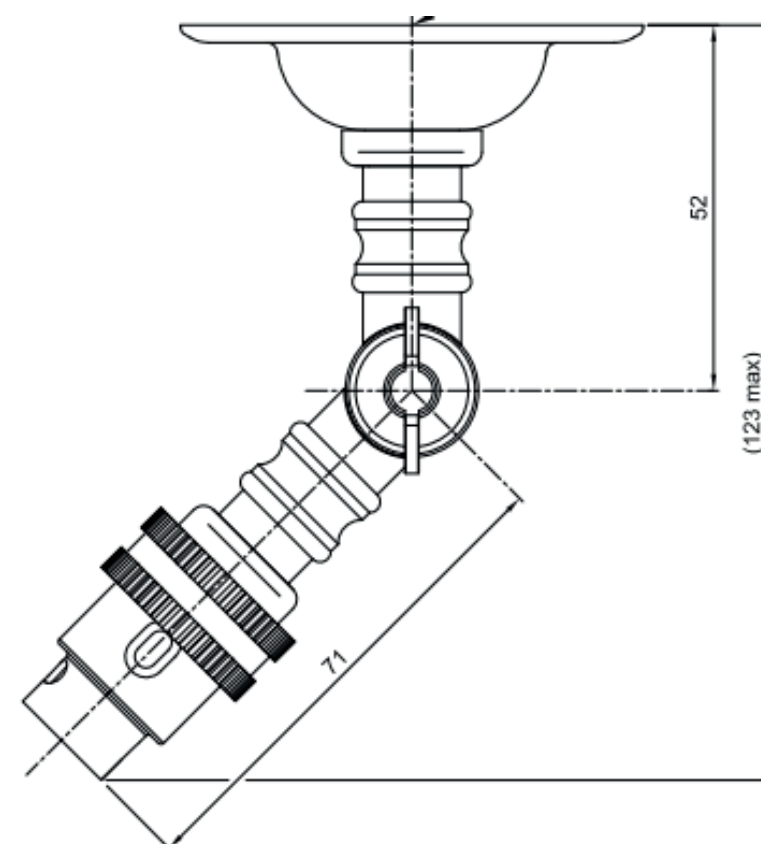

|                         |             |
|-------------------------|-------------|
|                         | Included    |
| Light source            | Spot        |
| Number of light sources | 1           |
| Socket Type             | B15D        |
| Bulb shape              | AR70        |
| Max Lamp Length         | 48mm        |
| power consumption       | 7W          |
| Luminous Flux           | 380lm       |
| Colour Temp             | 2700K/3000K |
| CRI                     | 80          |
| Lifetime                | 35000       |
| Beam angle              | 40°         |



## Electrical

|                        |      |
|------------------------|------|
| Switched               | .    |
| Battery                | No   |
| Dimmible               | .    |
| Dimming Range          | .    |
| Dimming method         | .    |
| Supply Frequency       | 50Hz |
| Driver/Ballast Voltage | .    |
| Efficacy               | A    |

## Finishes

|   |                              |
|---|------------------------------|
|  | Dark Bronze                  |
|  | Polished Chrome Plated Brass |
|  | Brushed Nickel Plated Brass  |
|  | Polished Nickel Plated Brass |

