


inédit

LIGHTING

Liro

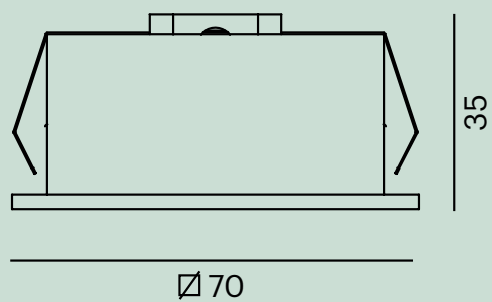

1 - 20 mm

65 mm

62 x 62 mm

Liro R

LED driver separatly order

LED · 220-240V AC · 6W · 2700K · CRI>90 · 620lm
beam angel 15°

472-30003560 **PW**
472-30003660 **B**

LED · 220-240V AC · 6W · 2700K · CRI>90 · 620lm
beam angel 34°

472-30013560 **PW**
472-30013660 **B**

LED · 220-240V AC · 6W · 3000K · CRI>90 · 620lm
beam angel 15°

472-30009560 **PW**
472-30009660 **B**

LED · 220-240V AC · 6W · 3000K · CRI>90 · 620lm
beam angel 34°

472-30019560 **PW**
472-30019660 **B**

CE IP 20

LED driver Liro R

not dimmable · 23W · 500mA · L: 147 · B: 44 · H: 30mm

24-127532n **w**

DALI dimmable · 20W · 250mA · L: 111 · B: 52 · H: 22mm

24-151403 **w**



Makes perfectly happy. For the realisation of individual light concepts.