

inédit

LIGHTING

TEKNA

Name **LOFT CEILING**
Number **N084**
Collection **NAUTIC**

General

Location	Indoor
Main material	Aluminium/brass
IP rating	IP20
Class	I
Bathroom zone	Zone 3
Voltage	230V
Driver Required	Integrated
Cable length (m)	.
Dimensions (mm/ W-H-D)	W155-H242
Mounting method	.
Brut weight (kg)	1,5
Gross weight (kg)	1
Packing (mm / W-H-D)	165x160x410
Energy Efficiency %	A



Lamp


	Included
Light source	Xicato COB LED 16W
Number of light sources	1
Socket Type	E27
Bulb shape	.
Max Lamp Length	.
power consumption	16w
Luminous Flux	1000lm
Colour Temp	2700K /3000K
CRI	95
Lifetime	50000
Beam angle	.

Electrical

Switched	No
Battery	No
Dimmible	Yes
Dimming Range	10 - 100%
Dimming method	Phase DIM
Supply Frequency	50Hz
Driver/Ballast Voltage	230V
Efficacy	.

Finishes

 Dark bronze

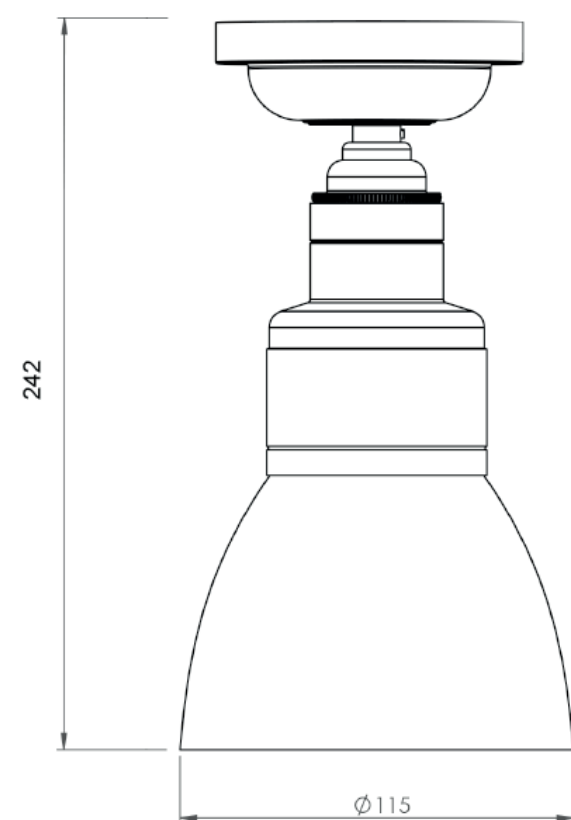

inédit

LIGHTING

TEKNA

Name **LOFT ON BOX**
Number **N085**
Collection **NAUTIC**


General

Location	Indoor
Main material	Aluminium/brass
IP rating	IP20
Class	I
Bathroom zone	Zone 3
Voltage	230V
Driver Required	Integrated
Cable length (m)	0,15
Dimenstions (mm/ W-H-D)	W115-H255-D125
Mounting method	.
Brut weight (kg)	1,5
Gross weight (kg)	1
Packing (mm / W-H-D)	165x160x410
Energy Efficiency %	A



Lamp

	Included
Light source	Xicato COB LED 16W
Number of light sources	1
Socket Type	E27
Bulb shape	.
Max Lamp Length	.
power consumption	16w
Luminous Flux	1000lm
Colour Temp	2700K /3000K
CRI	95
Lifetime	50000
Beam angle	.

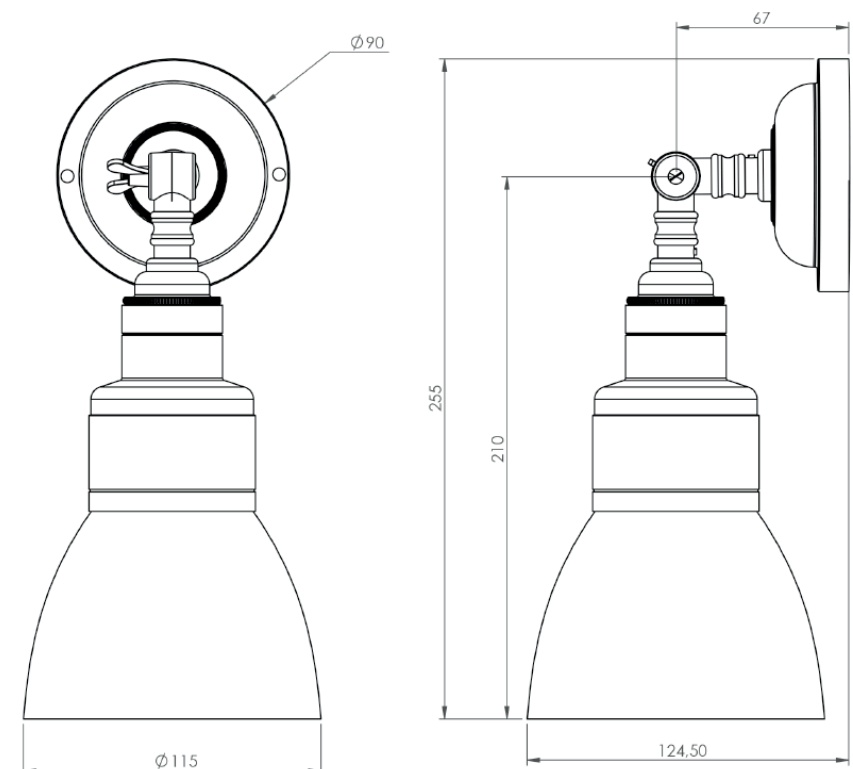

Electrical

Switched	No
Battery	No
Dimmible	Yes
Dimming Range	10 - 100%
Dimming method	Phase DIM
Supply Frequency	50Hz
Driver/Ballast Voltage	230V
Efficacy	.

Finishes

 Dark bronze

inédit

LIGHTING

TEKNA

Name **LOFT WALL**
Number **N087**
Collection **NAUTIC**


General

Location	Indoor
Main material	Aluminium/brass
IP rating	IP20
Class	I
Bathroom zone	Zone 3
Voltage	230V
Driver Required	Integrated
Cable length (m)	.
Dimensions (mm/ W-H-D)	W115-H240-D170
Mounting method	Wall bracket
Brut weight (kg)	1,5
Gross weight (kg)	1
Packing (mm / W-H-D)	165x160x410
Energy Efficiency %	A



Lamp

Light source	Included
Number of light sources	Xicato COB LED 16W
Soket Type	1
Bulb shape	E27
Max Lamp Length	.
power consumption	16w
Luminous Flux	1000lm
Colour Temp	2700K /3000K
CRI	95
Lifetime	50000
Beam angle	.

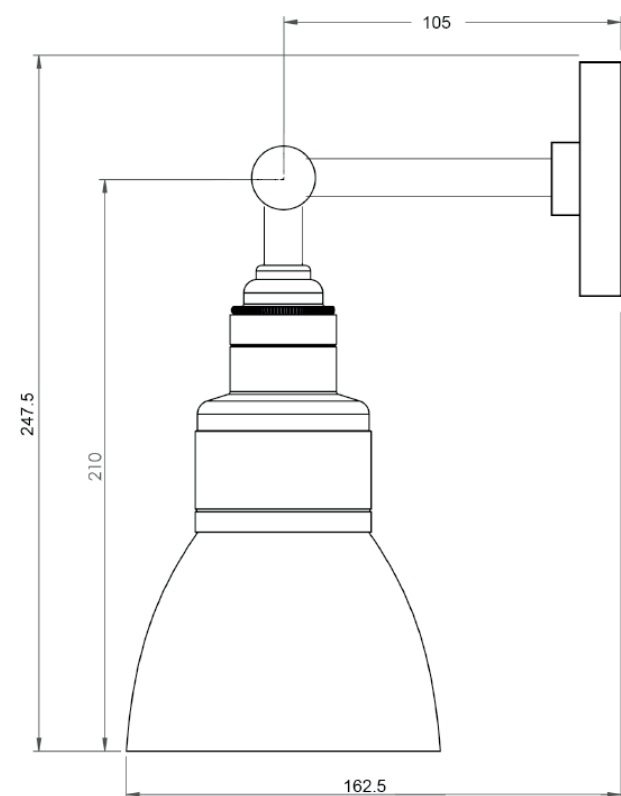


Electrical

Switched	No
Battery	No
Dimmible	Yes
Dimming Range	10 - 100%
Dimming method	Phase DIM
Supply Frequency	50Hz
Driver/Ballast Voltage	230V
Efficacy	.

Finishes

■ Dark bronze

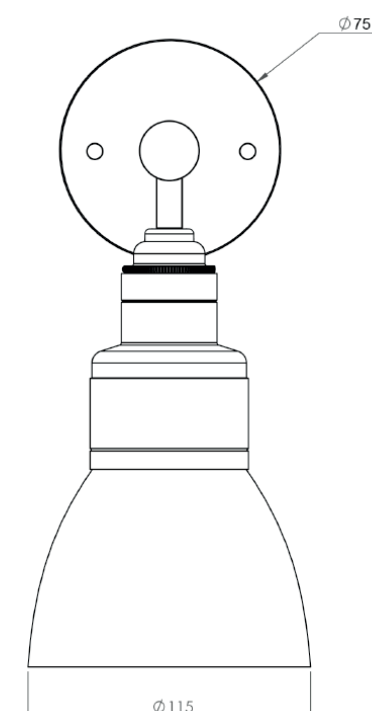

inédit

LIGHTING

TEKNA

Name **LOFT PENDANT**
Number **N086**
Collection **NAUTIC**

General

Location	Indoor
Main material	Aluminium/brass
IP rating	IP20
Class	I
Bathroom zone	Zone 3
Voltage	230V
Driver Required	Integrated
Cable length (m)	.
Dimensions (mm/ W-H-D)	W115-H190
Mounting method	
Brut weight (kg)	2
Gross weight (kg)	1,5
Packing (mm / W-H-D)	165x165x1350
Energy Efficiency %	A



Lamp


	Included
Light source	Xicato COB LED 16W
Number of light sources	1
Socket Type	E27
Bulb shape	.
Max Lamp Length	.
power consumption	16w
Luminous Flux	1000lm
Colour Temp	2700K /3000K
CRI	95
Lifetime	50000
Beam angle	.

Electrical

Switched	No
Battery	No
Dimmible	Yes
Dimming Range	10 - 100%
Dimming method	Phase DIM
Supply Frequency	50Hz
Driver/Ballast Voltage	230V
Efficacy	.

Finishes

■ Dark bronze

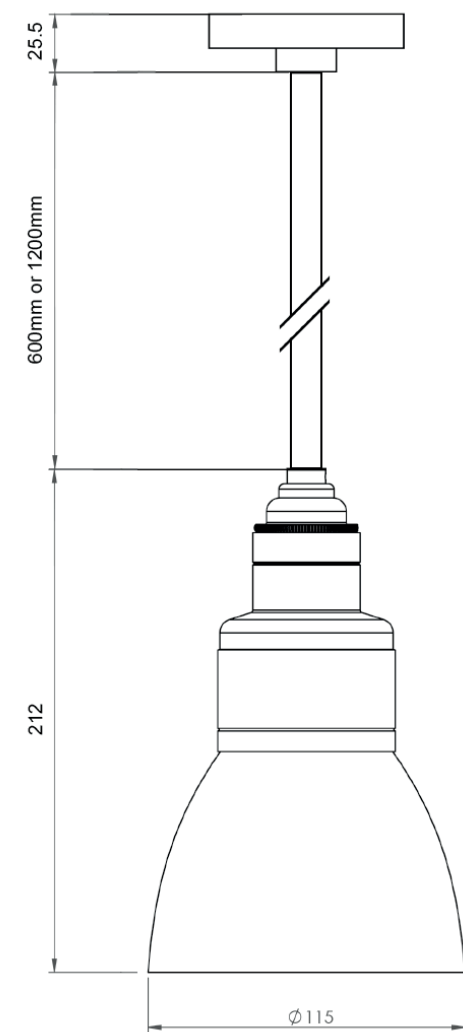

inédit

LIGHTING

TEKNA

Name **LOFT RECESSED**
Number **N177**
Collection **NAUTIC**

General

Location	Indoor
Main material	Aluminium/brass
IP rating	IP20
Class	I
Bathroom zone	Zone 3
Voltage	230V
Driver Required	Integrated
Cable length (m)	.
Dimensions (mm/ W-H-D)	See instalation sheet
Mounting method	.
Brut weight (kg)	1,5
Gross weight (kg)	1
Packing (mm / W-H-D)	165x160x410
Energy Efficiency %	A



Lamp

	Included
Light source	Xicato COB LED 16W
Number of light sources	1
Socket Type	E27
Bulb shape	.
Max Lamp Length	.
power consumption	16w
Luminous Flux	1000lm
Colour Temp	2700K /3000K
CRI	95
Lifetime	50000
Beam angle	.

Electrical

Switched	No
Battery	No
Dimmible	Yes
Dimming Range	10 - 100%
Dimming method	Phase DIM
Supply Frequency	50Hz
Driver/Ballast Voltage	230V
Efficacy	.

Finishes

 Dark bronze

