

**inédit**

LIGHTING

**TEKNA**

Name **MERCER**  
Number **N119**  
Collection **ARTON**

## General

Location Indoor  
Main material Brass/glass  
IP rating IP20  
Class I  
Bathroom zone Zone 3  
Voltage 230V  
Driver Required Integrated  
Cable length ( m ) 0,3  
Dimenstions ( mm/ W-H-D ) .  
Mounting method Wall bracket  
Brut weight (kg) 2.6  
Gross weight (kg) 2.1  
Packing (mm / W-H-D ) 160x160x400  
Energy Efficiency % A







## Lamp

Included  
Light source Filament LED  
Number of light sources 1  
Soket Type S14s  
Bulb shape Linear Lamp  
Max Lamp Length 300mm  
power consumption 8w  
Luminous Flux 270lm  
Colour Temp 2200k  
CRI 90  
Lifetime 30000h  
Beam angle 360°

## Electrical


Switched Yes  
Battery No  
Dimmible Yes  
Dimming Range <20% to 100%  
Dimming method Phase dim  
Supply Frequency 50Hz / 60Hz  
Driver/Ballast Voltage 230Vac  
Efficacy A

## Finishes


 Polished Brass  
 Dark Bronze  
 Polished Chrome Plated Brass  
 Polished Nickel Plated Brass  
 Gold Plated Brass  
 Black Mirror Plated Brass



FRONT VIEW

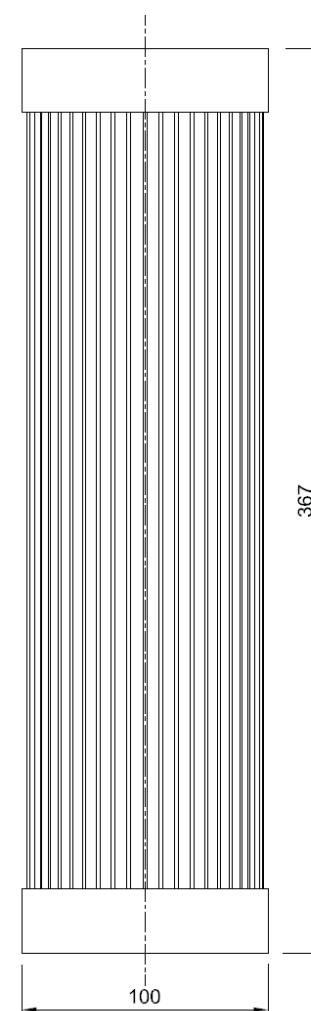

SIDE VIEW

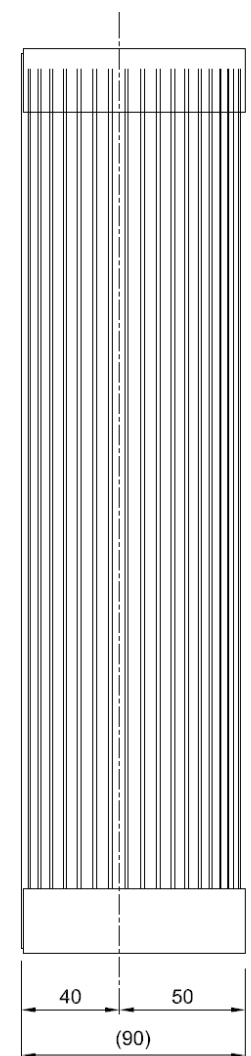

inédit

LIGHTING

TEKNA

Name **MERCER LONG**  
Number **N120**  
Collection **ARTON**

## General

Location Indoor  
Main material Brass/glass  
IP rating IP20  
Class I  
Bathroom zone Zone 3  
Voltage 230V  
Driver Required Integrated  
Cable length ( m ) 0,3  
Dimensions ( mm/ W-H-D ) .  
Mounting method Wall bracket  
Brut weight (kg) 4  
Gross weight (kg) 3.5  
Packing (mm / W-H-D ) 700x160x500  
Energy Efficiency % A







## Lamp

Included  
Light source Filament LED  
Number of light sources 1  
Socket Type S14s  
Bulb shape Linear Lamp  
Max Lamp Length 500mm  
power consumption 12w  
Luminous Flux 500lm  
Colour Temp 2200k  
CRI 90  
Lifetime 30000h  
Beam angle 360°

## Electrical

Switched Yes  
Battery No  
Dimmible Yes  
Dimming Range <20% to 100%  
Dimming method Phase dim  
Supply Frequency 50Hz / 60Hz  
Driver/Ballast Voltage 230Vac  
Efficacy A

## Finishes

-  Polished Brass
-  Dark Bronze
-  Polished Chrome Plated Brass
-  Polished Nickel Plated Brass
-  Gold Plated Brass
-  Black Mirror Plated Brass



FRONT VIEW

SIDE VIEW

