



inédit

LIGHTING

MICRO

Petit encastré de sol pour balisage (sans vis apparentes)

Small ground recess for walkways (without visible screws)

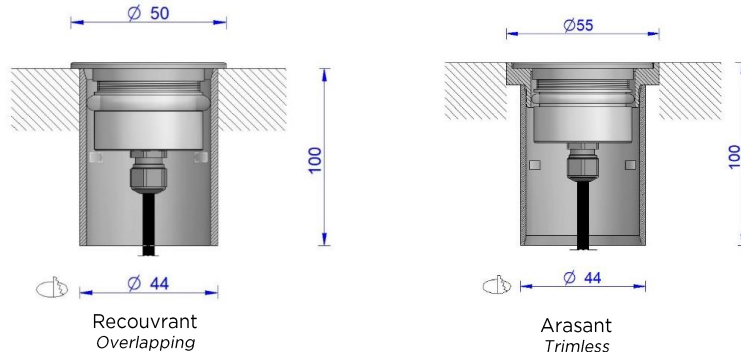

- . **Matière / Material:** Corps Aluminium anodisé / Body in anodized Aluminium
Disque Aluminium - Inox 316L - Laiton / Aluminium - Stainless Steel 316L - Brass
Verre trempé extra blanc / Tempered glass extra white
- . **Fixation / Fixing:** Encastré de sol / Ground recess
- . **Source / LED Source:** 1 LED OSRAM 3-SDCM
- . **T° de couleur / Color T°:** 2700K / 3000K / 4000K
- . **Flux produit / Product flux:** 159lm (caractérisé @ 3000K-12°)
- . **Efficacité / Efficacy:** 99lm/W
- . **IRC / CRI:** 80+ / 90+
- . **Optique / Optic:** 12° / 24° / 30° / 50° / Dépoli
- . **Orientable / Adjustable:** Non / No
- . **Dimensions / Dimensions:** Ø50mm / Ø55mm
- . **Poids / Weight:** 0.240Kg
- . **Protection / Protection:** IP68
- . **Indice Choc / Impact:** IK09
- . **Charge Statique / Static load:** 3T
- . **Karcher / High pressure:** Non / No
- . **Classe Protection / Protection:** Classe III
- . **Puissance / Power:** 1.6W
- . **Alimentation / Voltage:** 350mA / 500mA / 12-24VDC
- . **Convertisseur / Driver:** Déporté / Remote
- . **Pilotage / Control:** On-Off / 1-10V / DALI
- . **Câblage / Cables:** 1ml standard - (2x0.22mm² noir / 2x0.50mm² noir)
- . **Normes / Norms:** NF-EN 60529/60598-1/60598-2-1/60598-2-3/60598-2-5/62471
- . **Garantie / Warranty:** 2 ans standard / 2 years standard