

**inédit**

LIGHTING

**TEKNA**

Name **MONTROSE CITY-C**  
Number **N147**  
Collection **NAUTIC**

## General

Location	Indoor/outdoor
Main material	Brass/glass
IP rating	IP44
Class	I
Bathroom zone	Zone 3
Voltage	220-240V
Driver Required	No
Cable length ( m )	0,15
Dimensions ( mm/ W-H-D )	322-610-235
Mounting method	Wall bracket
Brut weight (kg)	3
Gross weight (kg)	2,5
Packing (mm / W-H-D )	410x360x510
Energy Efficiency %	0,78



## Lamp


Light source	Included
Number of light sources	Caret squirrel cage
Socket Type	2
Bulb shape	E27
Max Lamp Length	ST64
power consumption	165 mm
Luminous Flux	7,7W
Colour Temp	350lm
CRI	2300K
Lifetime	>80
Beam angle	25000hrs.
	360°

## Electrical

Switched	No
Battery	No
Dimmible	Yes
Dimming Range	See dimming list
Dimming method	Phase dimming
Supply Frequency	50/60Hz
Driver/Ballast Voltage	220-240V
Efficacy	A

## Finishes

 Dark Bronze

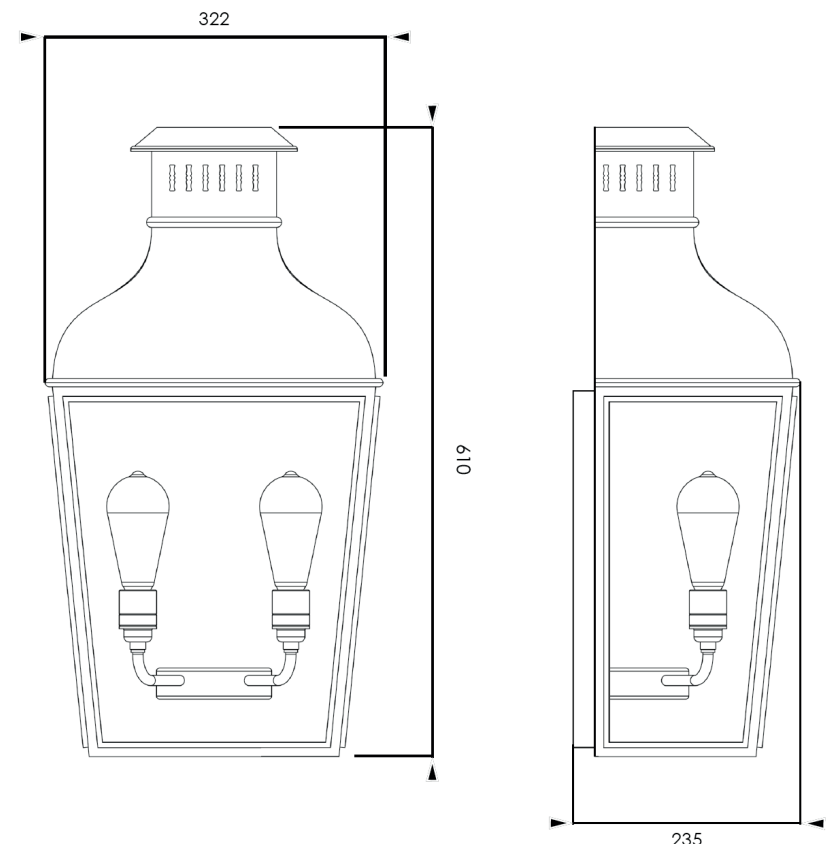

inédit

LIGHTING

Name **MONTROSE CITY SMALL-C**  
Number **N148**  
Collection **NAUTIC**

**TEKNA**


## General

Location	Indoor/outdoor
Main material	Brass/glass
IP rating	IP44
Class	I
Bathroom zone	Zone 3
Voltage	220-240V
Driver Required	No
Cable length ( m )	0,15
Dimensions ( mm/ W-H-D )	216-400-160
Mounting method	Wall bracket
Brut weight (kg)	3
Gross weight (kg)	2,5
Packing (mm / W-H-D )	410x360x511
Energy Efficiency %	0,78



## Lamp

	Included
Light source	Caret squirrel cage
Number of light sources	1
Socket Type	E27
Bulb shape	ST64
Max Lamp Length	165 mm
power consumption	7,7W
Luminous Flux	350lm
Colour Temp	2300K
CRI	>80
Lifetime	25000hrs.
Beam angle	360°

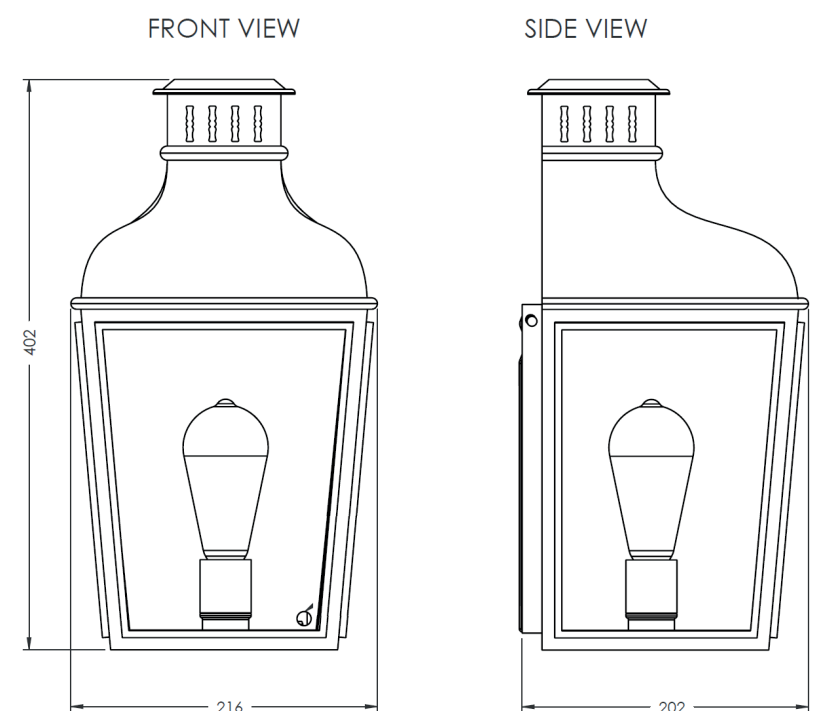

## Electrical

Switched	No
Battery	No
Dimmible	Yes
Dimming Range	See dimming list
Dimming method	Phase dimming
Supply Frequency	50/60Hz
Driver/Ballast Voltage	220-240V
Efficacy	A

## Finishes

■ Dark Bronze

