

inédit

LIGHTING

TEKNA

Name **MONTROSE SMALL ON BRACKET-C**
Number **N155**
Collection **NAUTIC**

General

Location Indoor/outdoor
Main material Brass/glass
IP rating IP43
Class I
Bathroom zone Zone 3
Voltage 220-240V
Driver Required No
Cable length (m) 0,15
Dimenstions (mm/ W-H-D) 216-605-303
Mounting method Wall bracket
Brut weight (kg) 7
Gross weight (kg) 6,5
Packing (mm / W-H-D) 460x460x950
Energy Efficiency % 0,78

Lamp

Light source Included
Number of light sources Caret squirrel cage
Soket Type 1
Bulb shape E27
Max Lamp Length ST64
power consumption 165 mm
Luminous Flux 7,7W
Colour Temp 350lm
CRI 2300K
Lifetime >80
Beam angle 25000hrs.
360°

Electrical


Switched No
Battery No
Dimmible Yes
Dimming Range See dimming list
Dimming method Phase dimming
Supply Frequency 50/60Hz
Driver/Ballast Voltage 220-240V
Efficacy A

Finishes


Dark Bronze



FRONT VIEW

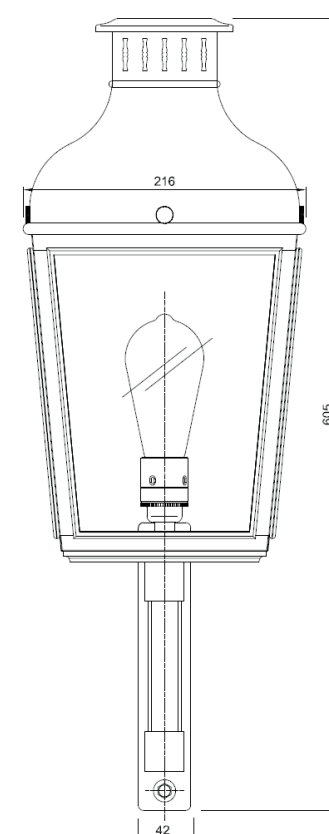

SIDE VIEW

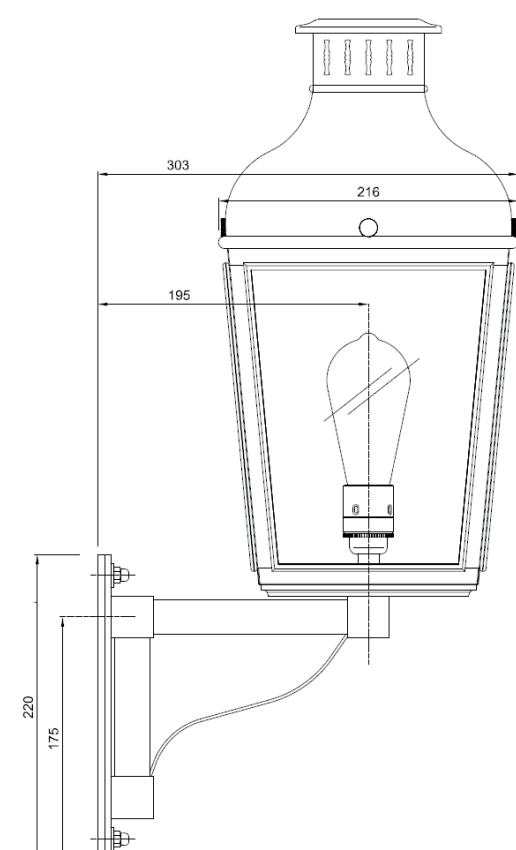



Name **MONTROSE WALL-C**
Number **N156**
Collection **NAUTIC**

TEKNA


General

Location	Indoor/outdoor
Main material	Brass/glass
IP rating	IP43
Class	I
Bathroom zone	Zone 3
Voltage	220-240V
Driver Required	No
Cable length (m)	0,3
Dimenstions (mm/ W-H-D)	322-822-761
Mounting method	Wall bracket
Brut weight (kg)	7
Gross weight (kg)	6,5
Packing (mm / W-H-D)	460x460x950
Energy Efficiency %	0,78



Lamp

	Included
Light source	Caret squirrel cage
Number of light sources	1
Soket Type	E27
Bulb shape	ST64
Max Lamp Length	165 mm
power consumption	7,7W
Luminous Flux	350lm
Colour Temp	2300K
CRI	>80
Lifetime	25000hrs.
Beam angle	360°

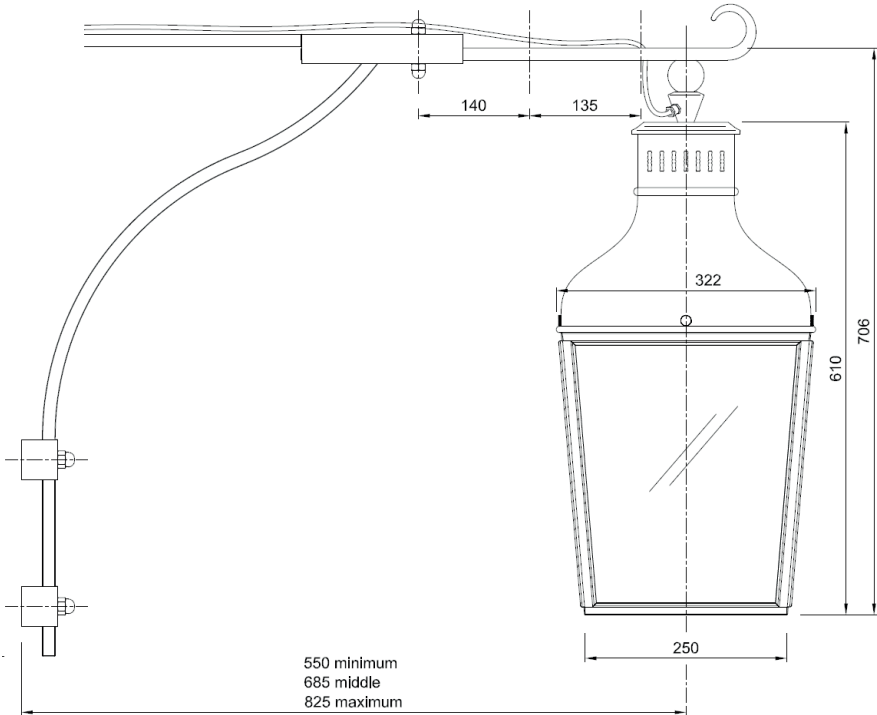

Electrical

Switched	No
Battery	No
Dimmible	Yes
Dimming Range	See dimming list
Dimming method	Phase dimming
Supply Frequency	50/60Hz
Driver/Ballast Voltage	220-240V
Efficacy	A

Finishes  Dark Bronze



Name **MONTROSE WALL LARGE-C**
Number **N157**
Collection **NAUTIC**

TEKNA

General

Location	Indoor/outdoor
Main material	Brass/glass
IP rating	IP43
Class	I
Bathroom zone	Zone 3
Voltage	220-240V
Driver Required	No
Cable length (m)	0,3
Dimenstions (mm/ W-H-D)	436-1085-818
Mounting method	Wall bracket
Brut weight (kg)	13
Gross weight (kg)	11
Packing (mm / W-H-D)	460x460x950
Energy Efficiency %	0,78




Lamp

	Included
Light source	Caret squirrel cage
Number of light sources	4
Soket Type	E27
Bulb shape	ST64
Max Lamp Length	165 mm
power consumption	7,7W
Luminous Flux	350lm
Colour Temp	2300K
CRI	>80
Lifetime	25000hrs.
Beam angle	360°

Electrical

Switched	No
Battery	No
Dimmible	Yes
Dimming Range	See dimming list
Dimming method	Phase dimming
Supply Frequency	50/60Hz
Driver/Ballast Voltage	220-240V
Efficacy	A

Finishes  Dark Bronze

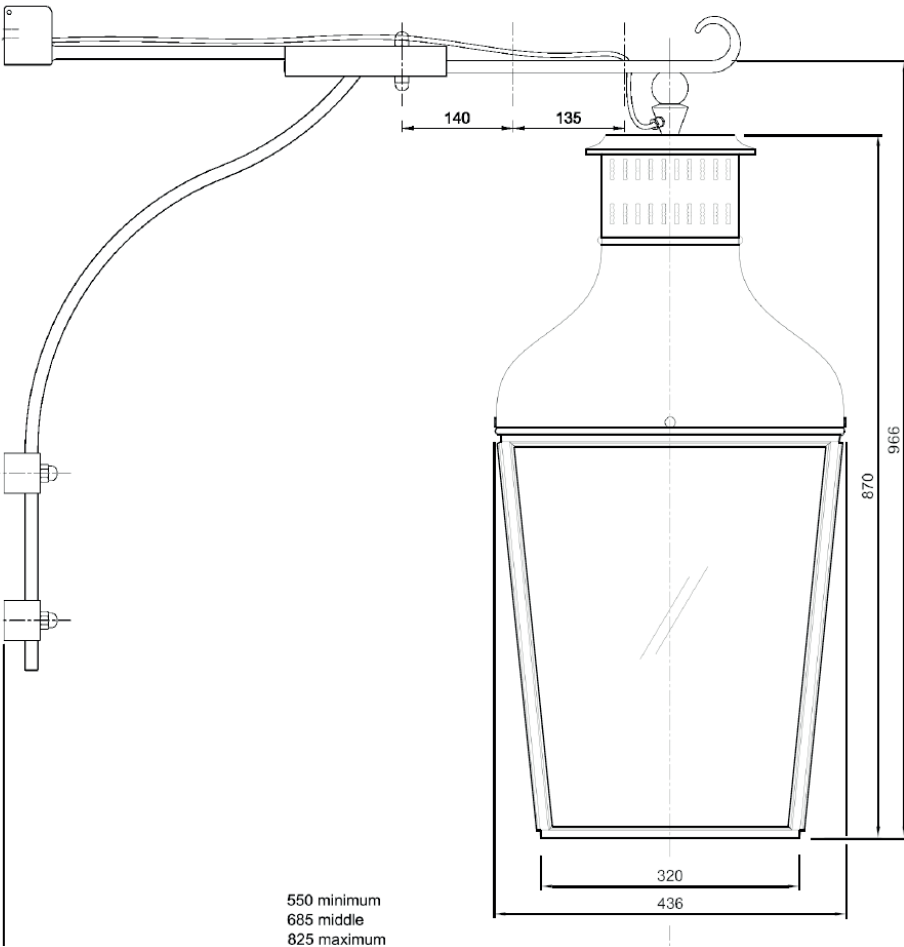



Name **MONTROSE WALL LARGE-LED**
Number **N159**
Collection **NAUTIC**

TEKNA

General

Location Indoor/outdoor
Main material Brass/glass
IP rating IP43
Class I
Bathroom zone Zone 3
Voltage 230V
Driver Required Integrated
Cable length (m) 0,3
Dimenstions (mm/ W-H-D) 436-1085-818
Mounting method Wall bracket
Brut weight (kg) 13
Gross weight (kg) 11
Packing (mm / W-H-D) 460x460x950
Energy Efficiency % A



Lamp


Included
Light source COB LED 12W
Number of light sources 1
Soket Type Flatspot
Bulb shape Flatspot 2
Max Lamp Length .
power consumption 12W
Luminous Flux 850lm
Colour Temp 2700K /3000K
CRI 97
Lifetime 25000
Beam angle 60°°

Electrical

Switched No
Battery No
Dimmible No / upon request
Dimming Range .
Dimming method upon request
Supply Frequency 50/60Hz
Driver/Ballast Voltage 90-264V
Efficacy 83%

Finishes

 Dark bronze

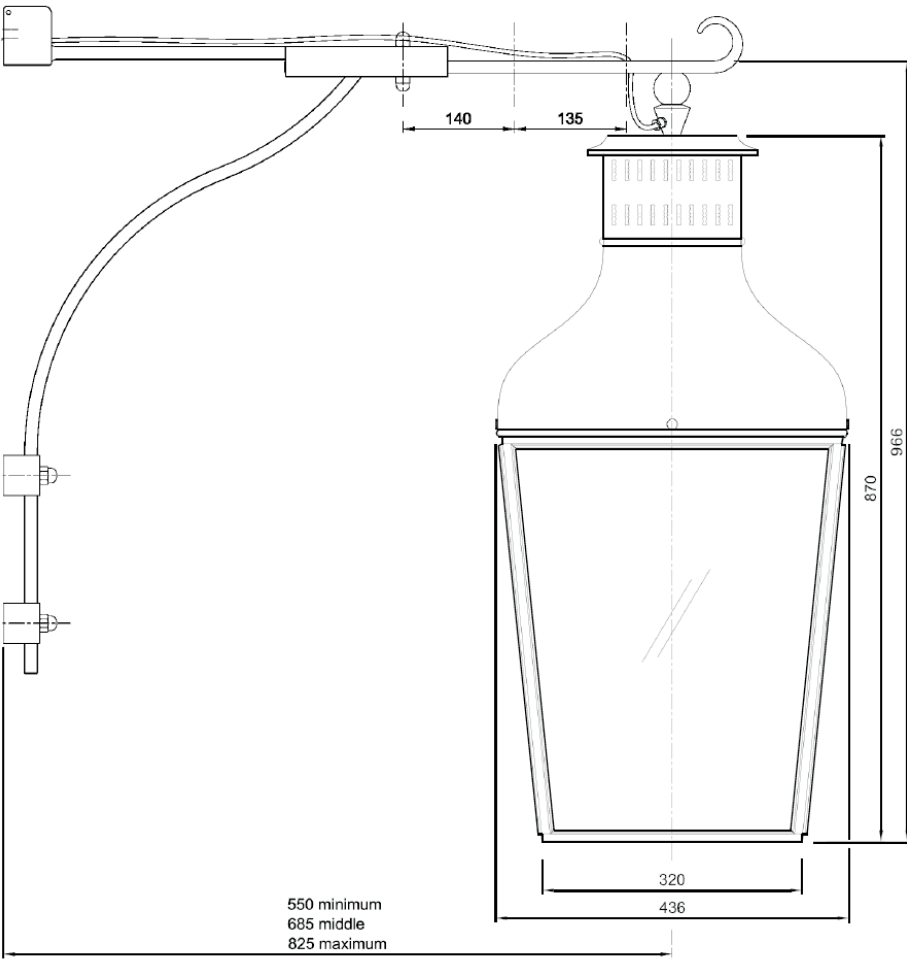



Name **MONTROSE WALL-LED**
Number **N157**
Collection **NAUTIC**

TEKNA


General

Location	Indoor/outdoor
Main material	Brass/glass
IP rating	IP43
Class	I
Bathroom zone	Zone 3
Voltage	230V
Driver Required	Integrated
Cable length (m)	0,3
Dimenstions (mm/ W-H-D)	322-822-761
Mounting method	Wall bracket
Brut weight (kg)	7
Gross weight (kg)	6,5
Packing (mm / W-H-D)	460x460x950
Energy Efficiency %	A



Lamp

	Included
Light source	COB LED 12W
Number of light sources	1
Soket Type	Flatspot
Bulb shape	Flatspot 2
Max Lamp Length	.
power consumption	12W
Luminous Flux	850lm
Colour Temp	2700K /3000K
CRI	97
Lifetime	25000
Beam angle	60°°

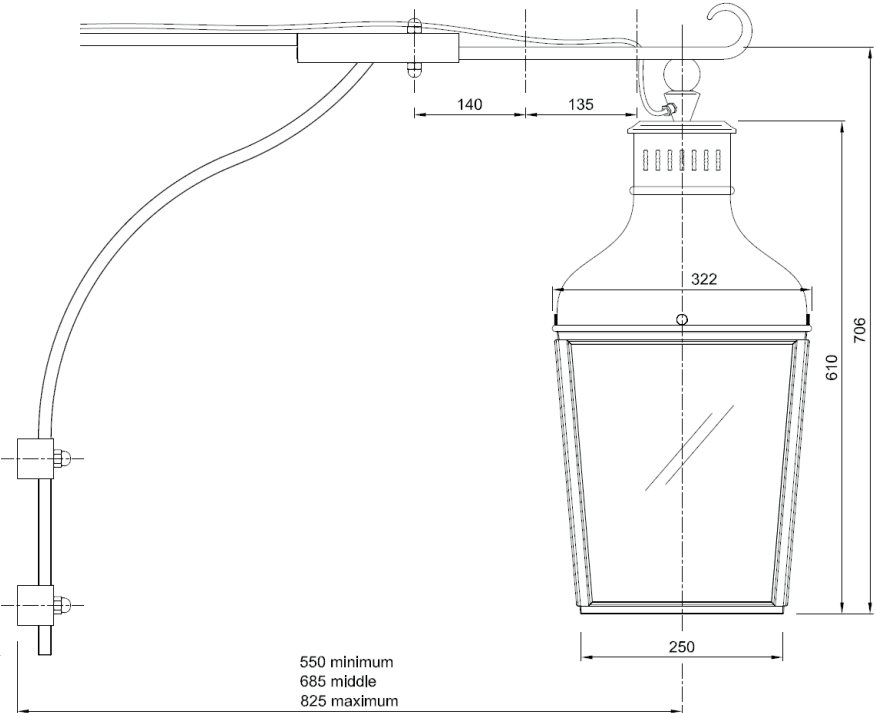

Electrical

Switched	No
Battery	No
Dimmible	No / upon request
Dimming Range	.
Dimming method	upon request
Supply Frequency	50/60Hz
Driver/Ballast Voltage	90-264V
Efficacy	83%

Finishes  Dark bronze



Name **MONTROSE LARGE PENDANT-LED**
Number **N154**
Collection **NAUTIC**

TEKNA

General

Location	Indoor/outdoor
Main material	Brass/glass
IP rating	IP43
Class	I
Bathroom zone	Zone 3
Voltage	230V
Driver Required	Integrated
Cable length (m)	made to order
Dimenstions (mm/ W-H-D)	436-922-436
Mounting method	Suspension rod
Brut weight (kg)	13
Gross weight (kg)	11
Packing (mm / W-H-D)	460x460x950
Energy Efficiency %	A



Lamp


	Included
Light source	COB LED 12W
Number of light sources	1
Soket Type	Flatspot
Bulb shape	Flatspot 2
Max Lamp Length	.
power consumption	12W
Luminous Flux	850lm
Colour Temp	2700K /3000K
CRI	97
Lifetime	25000
Beam angle	60°°

Electrical

Switched	No
Battery	No
Dimmible	No / upon request
Dimming Range	.
Dimming method	upon request
Supply Frequency	50/60Hz
Driver/Ballast Voltage	90-264V
Efficacy	83%

Finishes

 Dark bronze

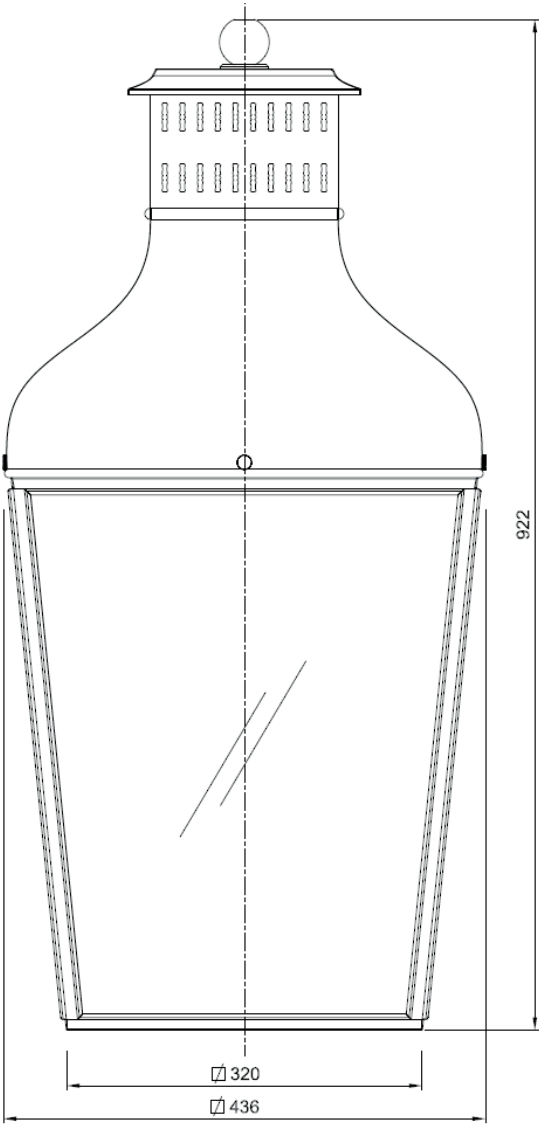



Name **MONTROSE PENDANT-C**
Number **N151**
Collection **NAUTIC**

TEKNA

General

Location	Indoor/outdoor
Main material	Brass/glass
IP rating	IP43
Class	I
Bathroom zone	Zone 3
Voltage	220-240V
Driver Required	No
Cable length (m)	Made to order
Dimenstions (mm/ W-H-D)	322x719x322
Mounting method	Suspension rod
Brut weight (kg)	7
Gross weight (kg)	6,5
Packing (mm / W-H-D)	460x460x950
Energy Efficiency %	0,78



Lamp


	Included
Light source	Caret squirrel cage
Number of light sources	1
Soket Type	E27
Bulb shape	ST64
Max Lamp Length	165 mm
power consumption	7,7W
Luminous Flux	350lm
Colour Temp	2300K
CRI	>80
Lifetime	25000hrs.
Beam angle	360°

Electrical

Switched	No
Battery	No
Dimmible	Yes
Dimming Range	See dimming list
Dimming method	Phase dimming
Supply Frequency	50/60Hz
Driver/Ballast Voltage	220-240V
Efficacy	A

Finishes

 Dark Bronze

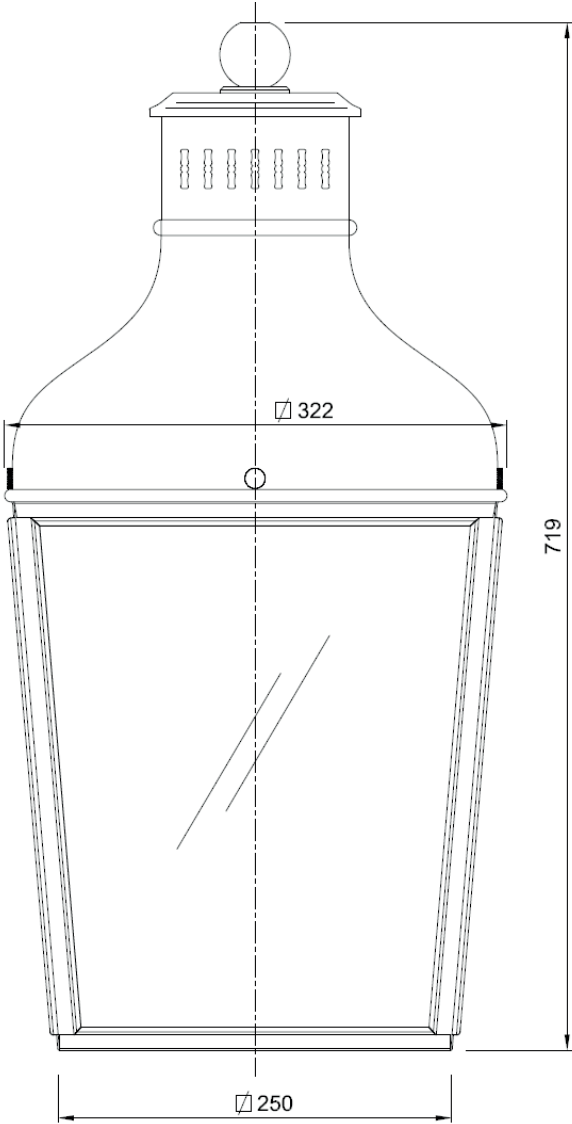



Name **MONTROSE LARGE PENDANT-C**
Number **N153**
Collection **NAUTIC**

TEKNA

General

Location Indoor/outdoor
Main material Brass/glass
IP rating IP43
Class I
Bathroom zone Zone 3
Voltage 220-240V
Driver Required No
Cable length (m) Made to order
Dimenstions (mm/ W-H-D) 436-922-436
Mounting method Suspension rod
Brut weight (kg) 13
Gross weight (kg) 11
Packing (mm / W-H-D) 460x460x950
Energy Efficiency % 0,78



Lamp


Light source Included
Number of light sources Caret squirrel cage
Soket Type 4
Bulb shape E27
Max Lamp Length ST64
power consumption 165 mm
Luminous Flux 7,7W
Colour Temp 350lm
CRI 2300K
Lifetime >80
Beam angle 25000hrs.
360°

Electrical

Switched No
Battery No
Dimmible Yes
Dimming Range See dimming list
Dimming method Phase dimming
Supply Frequency 50/60Hz
Driver/Ballast Voltage 220-240V
Efficacy A

Finishes

 Dark Bronze

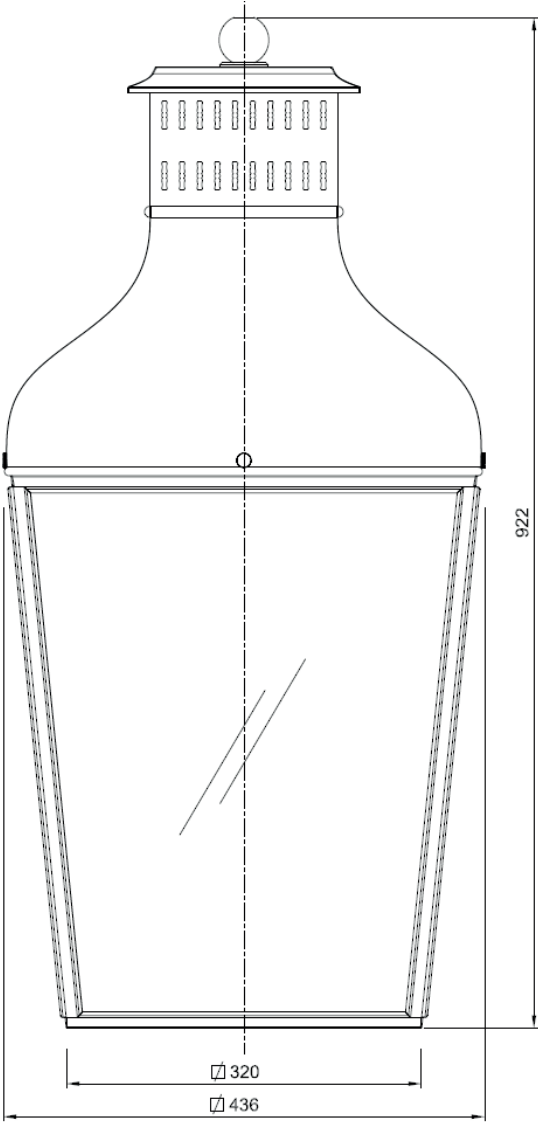



Name **MONTROSE PENDANT-LED**
Number **N152**
Collection **NAUTIC**

TEKNA

General

Location	Indoor/outdoor
Main material	Brass/glass
IP rating	IP43
Class	I
Bathroom zone	Zone 3
Voltage	230V
Driver Required	Included
Cable length (m)	made to order
Dimenstions (mm/ W-H-D)	322x719x323
Mounting method	Suspension rod
Brut weight (kg)	7
Gross weight (kg)	6,5
Packing (mm / W-H-D)	460x460x951
Energy Efficiency %	A



Lamp


	Included
Light source	COB LED 12W
Number of light sources	1
Soket Type	Flatspot
Bulb shape	Flatspot 2
Max Lamp Length	.
power consumption	12W
Luminous Flux	850lm
Colour Temp	2700K /3000K
CRI	97
Lifetime	25000
Beam angle	60°°

Electrical

Switched	No
Battery	No
Dimmible	No / upon request
Dimming Range	.
Dimming method	upon request
Supply Frequency	50/60Hz
Driver/Ballast Voltage	90-264V
Efficacy	83%

Finishes

 Dark bronze

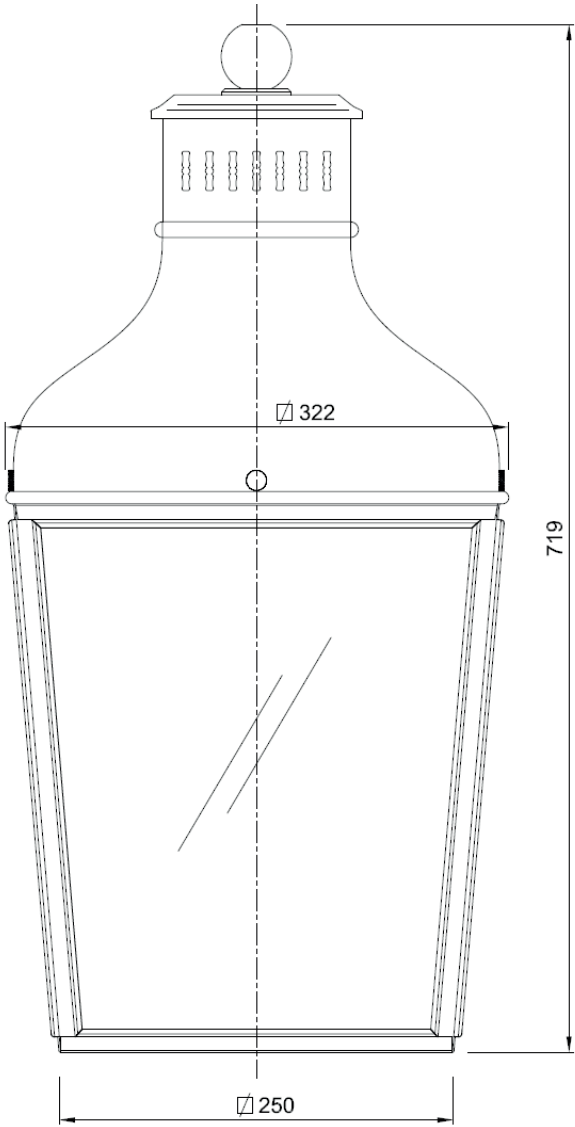



Name **MONTROSE SMALL PENDANT-C**
Number **N150**
Collection **NAUTIC**

TEKNA


General

Location	Indoor/outdoor
Main material	Brass/glass
IP rating	IP43
Class	I
Bathroom zone	Zone 3
Voltage	220-240V
Driver Required	No
Cable length (m)	Made to order
Dimenstions (mm/ W-H-D)	216x431x216
Mounting method	Suspension rod
Brut weight (kg)	4
Gross weight (kg)	2,5
Packing (mm / W-H-D)	410x360x510
Energy Efficiency %	0,78



Lamp

	Included
Light source	Caret squirrel cage
Number of light sources	1
Soket Type	E27
Bulb shape	ST64
Max Lamp Length	165 mm
power consumption	7,7W
Luminous Flux	350lm
Colour Temp	2300K
CRI	>80
Lifetime	25000hrs.
Beam angle	360°

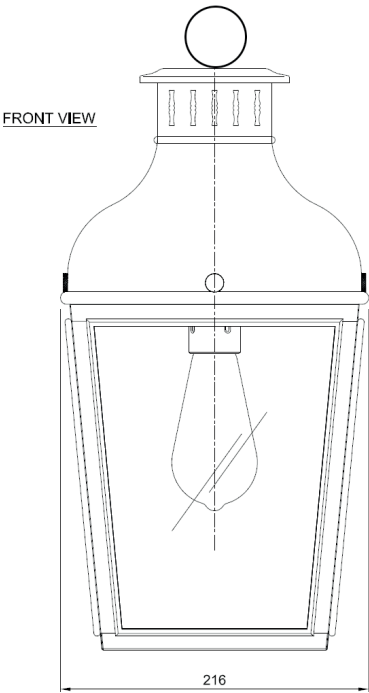

Electrical

Switched	No
Battery	No
Dimmible	Yes
Dimming Range	See dimming list
Dimming method	Phase dimming
Supply Frequency	50/60Hz
Driver/Ballast Voltage	220-240V
Efficacy	A

Finishes



Dark Bronze

