

inédit

LIGHTING

TEKNA

Name **PICTURE LIGHT MEDIUM**
Number **N146**
Collection **NAUTIC**


General

Location	Indoor
Main material	Brass/glass
IP rating	IP20
Class	I
Bathroom zone	Zone 3
Voltage	230V
Driver Required	Integrated
Cable length (m)	0,15
Dimensions (mm/ W-H-D)	330-115-249
Mounting method	Wall bracket
Brut weight (kg)	2
Gross weight (kg)	1,5
Packing (mm / W-H-D)	370x270x160
Energy Efficiency %	A+



Lamp






Lamp	Included
Light source	Filament LED
Number of light sources	2
Socket Type	E14
Bulb shape	T25
Max Lamp Length	115mm
power consumption	4w
Luminous Flux	260lm
Colour Temp	2200k
CRI	95
Lifetime	25000
Beam angle	360°

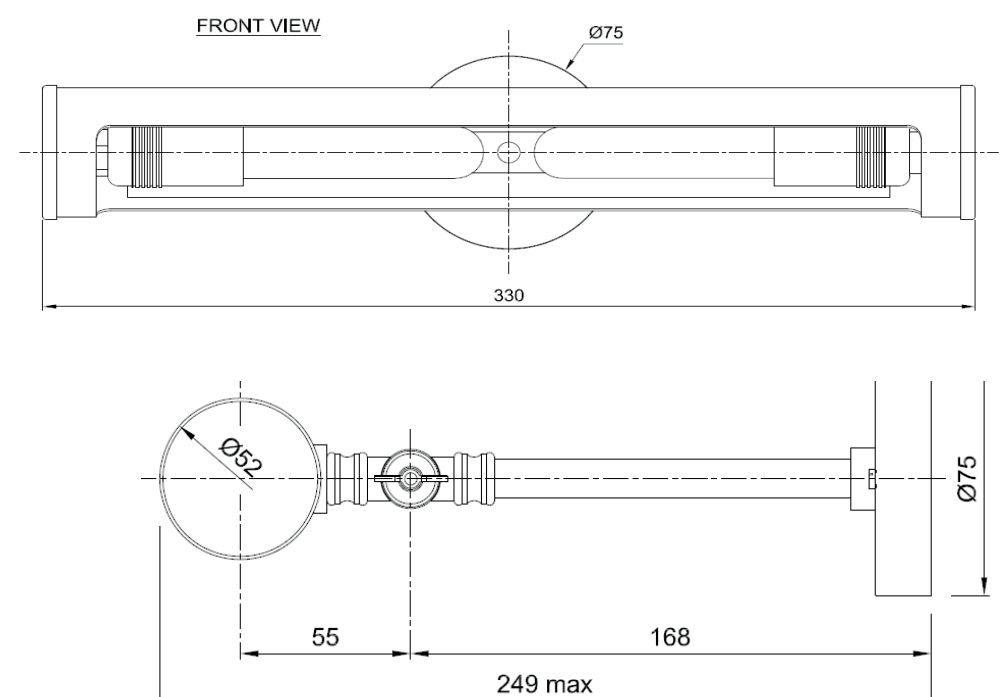

Electrical

Switched	No
Battery	No
Dimmible	Yes
Dimming Range	see dimming list
Dimming method	Phase dimming
Supply Frequency	50Hz
Driver/Ballast Voltage	220v-240v
Efficacy	.

Finishes

	Dark Bronze
	Polished Brass
	Polished Chrome Plated Brass
	Brushed Nickel Plated Brass
	Polished Nickel Plated Brass

inédit

LIGHTING

TEKNA

Name **PICTURE LIGHT SMALL**
Number **N145**
Collection **NAUTIC**


General

Location	Indoor
Main material	Brass/glass
IP rating	IP20
Class	I
Bathroom zone	Zone 3
Voltage	230V
Driver Required	Integrated
Cable length (m)	0,15
Dimensions (mm/ W-H-D)	210-115-249
Mounting method	Wall bracket
Brut weight (kg)	1,5
Gross weight (kg)	1
Packing (mm / W-H-D)	370x270x160
Energy Efficiency %	A+



Lamp

Light source	Included	Filament LED
Number of light sources	1	
Socket Type	E14	
Bulb shape	T25	
Max Lamp Length	115mm	
power consumption	4w	
Luminous Flux	260lm	
Colour Temp	2200k	
CRI	95	
Lifetime	25000	
Beam angle	360°	

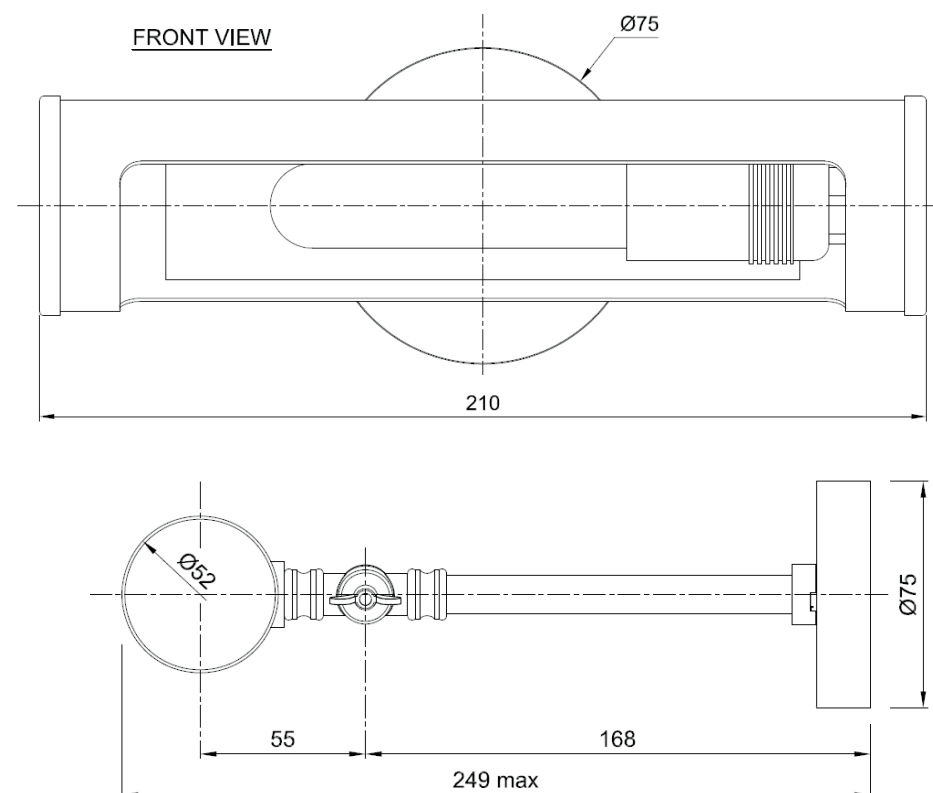

Electrical

Switched	No
Battery	No
Dimmible	Yes
Dimming Range	see dimming list
Dimming method	Phase dimming
Supply Frequency	50Hz
Driver/Ballast Voltage	220v-240v
Efficacy	.

Finishes

