


light + ventilation mini

prado

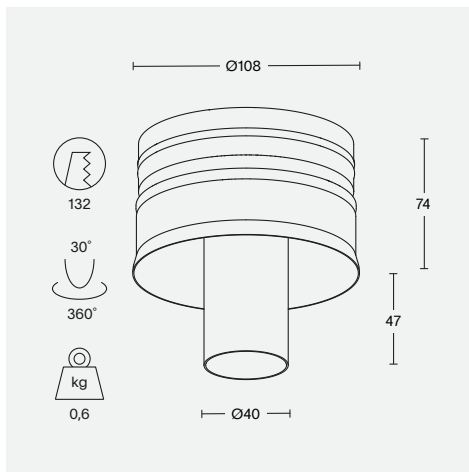

light specs

lamp	LED
optic	lens
driver	excluded
IP	44
CRI	90+ / 97
class	III

ventilation specs

type	air extraction
air flow	max. 50m ³ /h
pressure	7 - 75 Pa
noise level	< 25 dB(A)
adjustment	32 steps
lock mechanism	integrated

luminaire output

	2700K				3000K			
	10°	20°	40°	60°	10°	20°	40°	60°
350mA (5.7W)	425 lm	525 lm	525 lm	525 lm	450 lm	550 lm	550 lm	550 lm
500mA (8.5W)		710 lm	710 lm	710 lm		750 lm	750 lm	750 lm
700mA (12.8W)			950 lm				1000 lm	


order number

	2700K				3000K			
	10°	20°	40°	60°	10°	20°	40°	60°
black ano.	8000-2332	8000-1778	8000-1411	8000-2522	8000-2333	8000-1789	8000-1412	8000-2526
white struc.	8000-2334	8000-1782	8000-1415	8000-2523	8000-2335	8000-11783	8000-1416	8000-2527


light + ventilation mini

ventilation - capacity graphs

air extraction

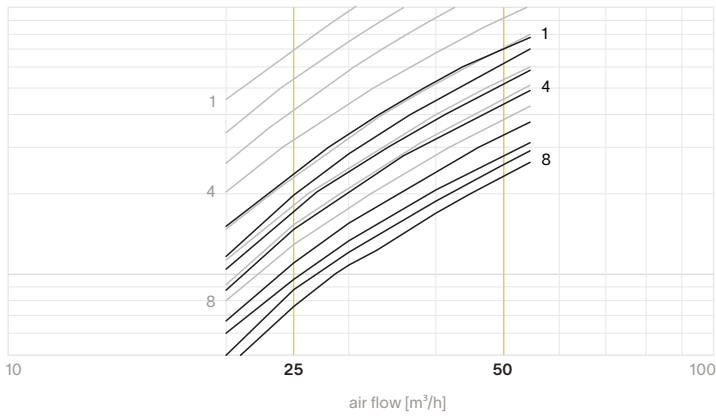

air supply*

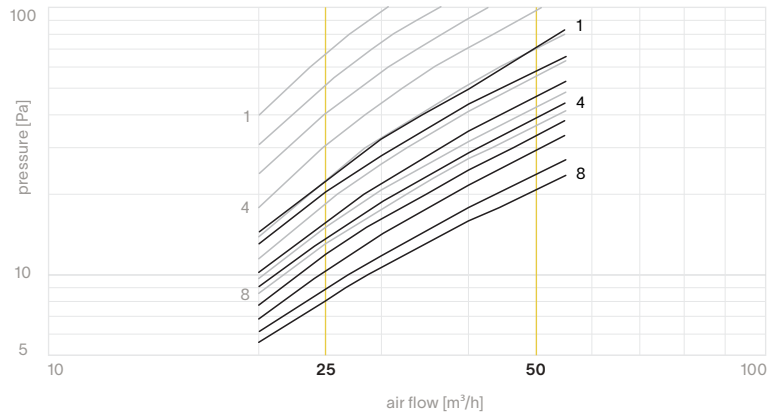

— with 25m³/h ring

— without 25m³/h ring

*downward airflow not suited for installation in or above comfort zones

accessoires

installation

8000 - 0001	plaster ring Ø108
8000 - 0011	clt csc ring Ø108

drivers

8000 - 0021	DALI dimmable driver 38W
8000 - 0022	1-10V dimmable driver 36W
8000 - 0023	non-dimmable driver 42W
8000 - 0026	DALI dimmable driver 60W
8000 - 0027	DALI deep dim driver 20W