


inédit

LIGHTING

Sator

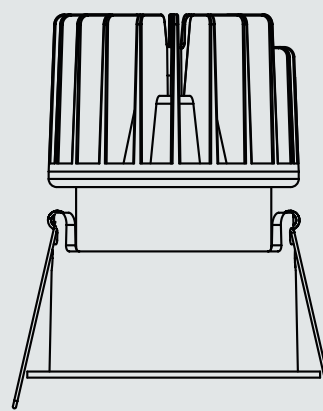

Ø 8

Ø 72

1 - 20 mm

119 mm

Ø 68 mm


30°

Sator Round R


LED driver separately order


LED · 220-240V AC · 10W · 2700K · CRI>90 · 600lm
beam angle 24°


305-30013500 

305-30013600 

LED · 220-240V AC · 10W · 3000K · CRI>90 · 600lm
beam angle 24°

305-30019500 

305-30019600 

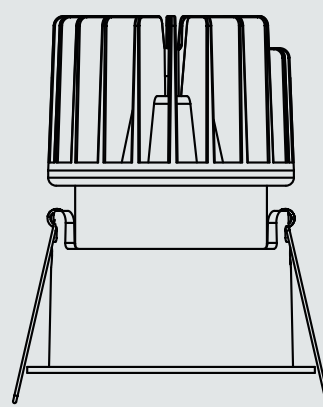

Ø 8

Ø 72

1 - 20 mm

119 mm


65 x 65 mm


30°

Sator Square R


LED driver separately order


LED · 220-240V AC · 10W · 2700K · CRI>90 · 600lm
beam angle 24°

305-30023500 

305-30023600 


LED · 220-240V AC · 10W · 3000K · CRI>90 · 600lm
beam angle 24°

305-30029500 


305-30029600 

LED driver Sator R

not dimmable · 11W · 250mA · L: 147 · B: 44 · H: 22mm

24-127570 

DALI dimmable · 12W · 250mA · L: 111 · B: 52 · H: 22mm

24-151403 

Pleasant lighting for
many possible
applications.

  IP 44