

**inédit**

LIGHTING

**TEKNA**

Name **TRIBECA 2**  
Number **N138**  
Collection **ARTON**

## General

Location Indoor  
Main material Brass/Aluminum alloy  
IP rating IP20  
Class I  
Bathroom zone Zone 3  
Voltage 230V  
Driver Required Integrated  
Cable length ( m ) 0,2  
Dimenstions ( mm/W-H-D ) .  
Mounting method Ceiling installation kit  
Brut weight (kg) 9  
Gross weight (kg) 7  
Packing (mm / W-H-D ) .  
Energy Efficiency % A

## Lamp



Light source Included  
Light source Soraa retrofit led  
Number of light sources 2  
Soket Type GU10  
Bulb shape MR16  
Max Lamp Length 54,5  
power consumption 7,5W / 9,5W  
Luminous Flux 390lm / 465lm  
Colour Temp 2700K / 3000K  
CRI 95  
Lifetime 35000  
Beam angle 10° / 25° / 36° / 60°

## Electrical

Switched .  
Battery No  
Dimmible Yes  
Dimming Range <20% to 100%  
Dimming method Phase dim  
Supply Frequency 50Hz / 60Hz  
Driver/Ballast Voltage 230Vac  
Efficacy A

## Finishes

■ Dark Bronze  
■ Polished Chrome Plated Brass  
■ Burshed Nickel Plated Brass

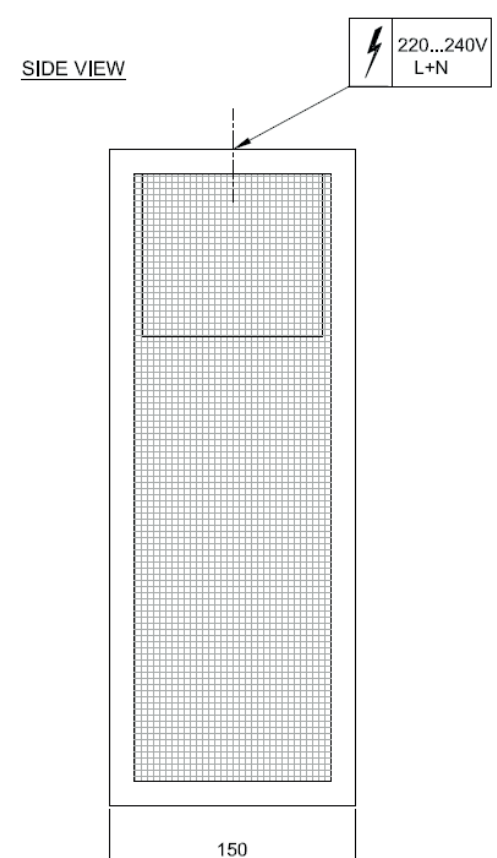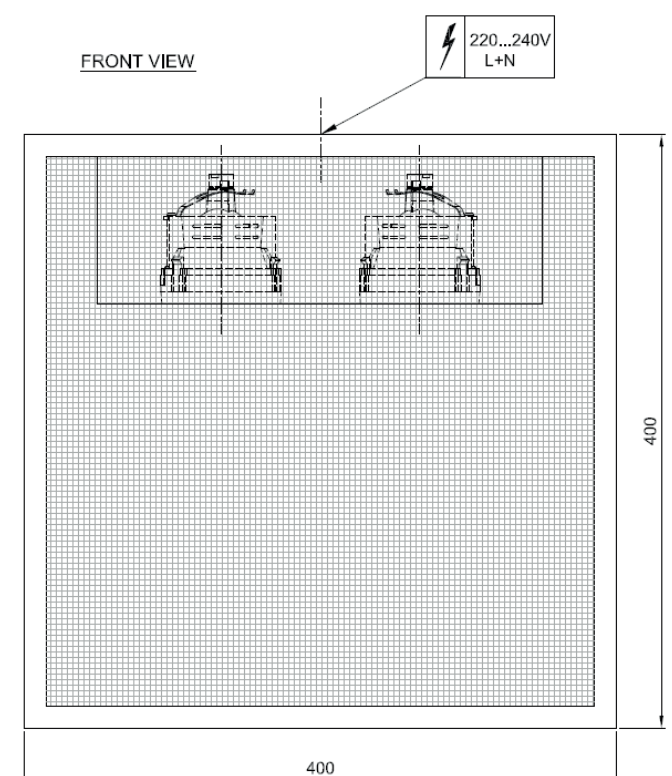

inédit

LIGHTING

TEKNA

Name **TRIBECA 4**  
Number **N139**  
Collection **ARTON**

## General

Location Indoor  
Main material Brass/Aluminum alloy  
IP rating IP20  
Class I  
Bathroom zone Zone 3  
Voltage 230V  
Driver Required Integrated  
Cable length ( m ) 0,2  
Dimensions ( mm/ W-H-D ) .  
Mounting method Ceiling installation kit  
Brut weight (kg) 13.4  
Gross weight (kg) 10  
Packing (mm / W-H-D ) 530x530x500  
Energy Efficiency % A

## Lamp



Light source Soraa retrofit led  
Number of light sources 4  
Socket Type GU10  
Bulb shape MR16  
Max Lamp Length 54,5  
power consumption 7,5W / 9,5W  
Luminous Flux 390lm / 465lm  
Colour Temp 2700K / 3000K  
CRI 95  
Lifetime 35000  
Beam angle 10° / 25° / 36° / 60°

## Electrical

Switched .  
Battery No  
Dimmible Yes  
Dimming Range <20% to 100%  
Dimming method Phase dim  
Supply Frequency 50Hz / 60Hz  
Driver/Ballast Voltage 230Vac  
Efficacy A

## Finishes

■ Dark Bronze  
■ Polished Chrome Plated Brass  
■ Burshed Nickel Plated Brass

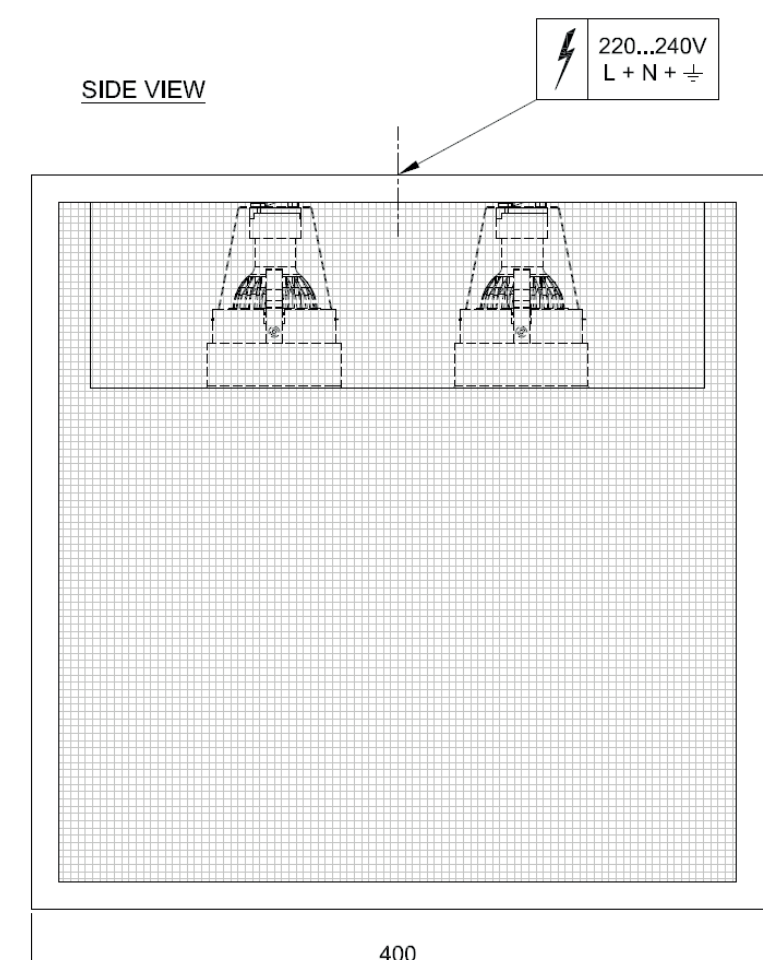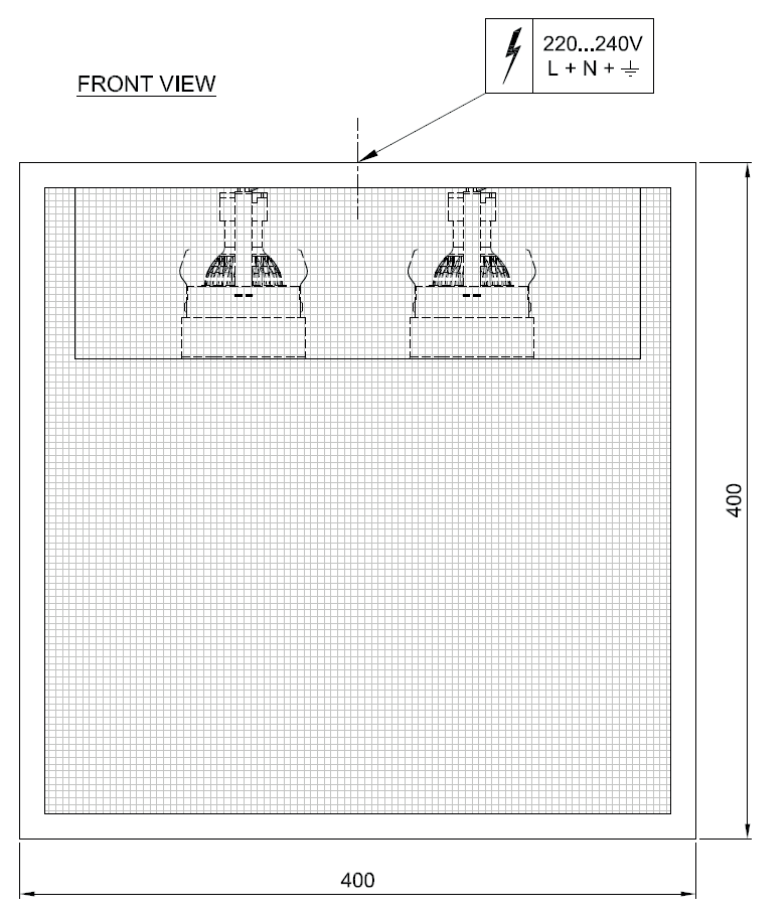

inédit

LIGHTING

TEKNA

Name **TRIBECA 5**  
Number **N140**  
Collection **ARTON**



## General

Location Indoor  
Main material Brass/Aluminum alloy  
IP rating IP20  
Class I  
Bathroom zone Zone 3  
Voltage 230V  
Driver Required Integrated  
Cable length ( m ) 0,3  
Dimenstions ( mm/ W-H-D ) .  
Mounting method Ceiling installation kit  
Brut weight (kg) 15.4  
Gross weight (kg) 2  
Packing (mm / W-H-D) 145x40x40  
Energy Efficiency % A



## Lamp

Light source Soraal retrofit led  
Number of light sources 4  
Soket Type GU10  
Bulb shape MR16  
Max Lamp Length 54,5  
power consumption 7,5W / 9,5W  
Luminous Flux 390lm / 465lm  
Colour Temp 2700K / 3000K  
CRI 95  
Lifetime 35000  
Beam angle 10° / 25° / 36° / 60°

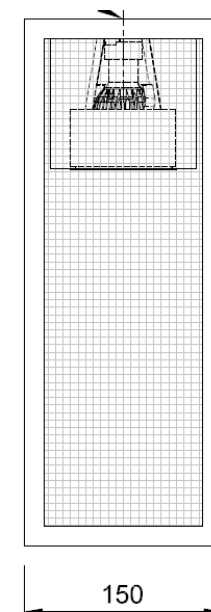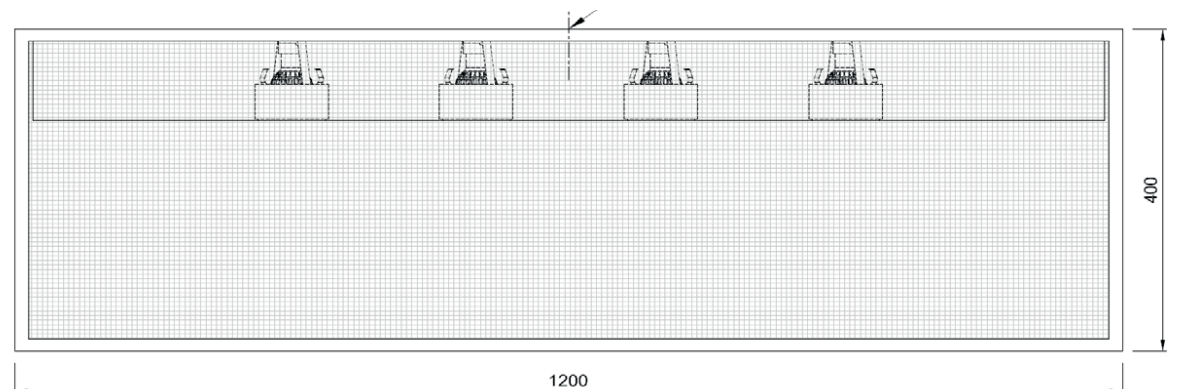

## Electrical

Switched .  
Battery No  
Dimmible Yes  
Dimming Range <20% to 100%  
Dimming method Phase dim  
Supply Frequency 50Hz / 60Hz  
Driver/Ballast Voltage 230Vac  
Efficacy A

## Finishes

■ Dark Bronze  
■ Polished Chrome Plated Brass  
■ Brushed Nickel Plated Brass