

**inédit**

LIGHTING

**TEKNA**

Name **ILFORD LARGE-C**  
Number **N100**  
Collection **NAUTIC**

## General

Location	Indoor
Main material	Brass/glass
IP rating	IP20
Class	I
Bathroom zone	Zone 3
Voltage	220-240V
Driver Required	No
Cable length ( m )	Made to order
Dimensions ( mm/ W-H-D )	W395-H587-D395
Mounting method	Suspension rod
Brut weight (kg)	17
Gross weight (kg)	9
Packing (mm / W-H-D )	535x535x770
Energy Efficiency %	0,78



## Lamp

Light source	Included
Number of light sources	Caret squirrel cage
Socket Type	4
Bulb shape	E27
Max Lamp Length	ST64
power consumption	165 mm
Luminous Flux	7,7W
Colour Temp	350lm
CRI	2300K
Lifetime	>80
Beam angle	25000hrs.
	360°


## Electrical

Switched	No
Battery	No
Dimmible	Yes
Dimming Range	See dimming list
Dimming method	Phase dimming
Supply Frequency	50/60Hz
Driver/Ballast Voltage	220-240V
Efficacy	A


## Finishes

■ Dark Bronze

FRONT VIEW

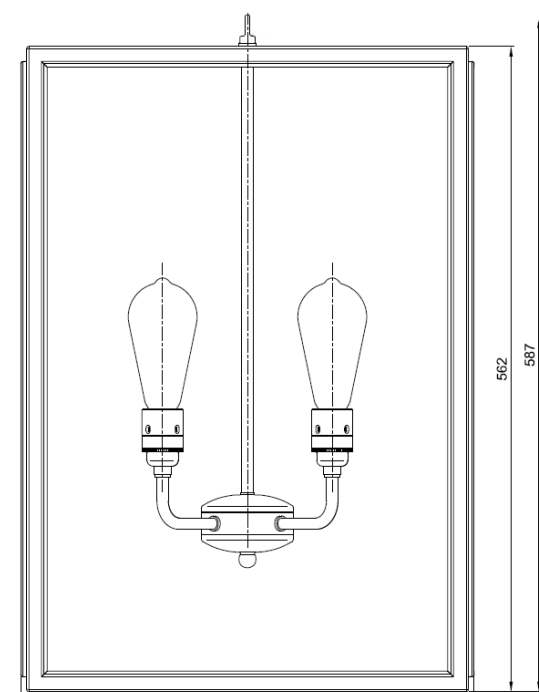

SIDE VIEW

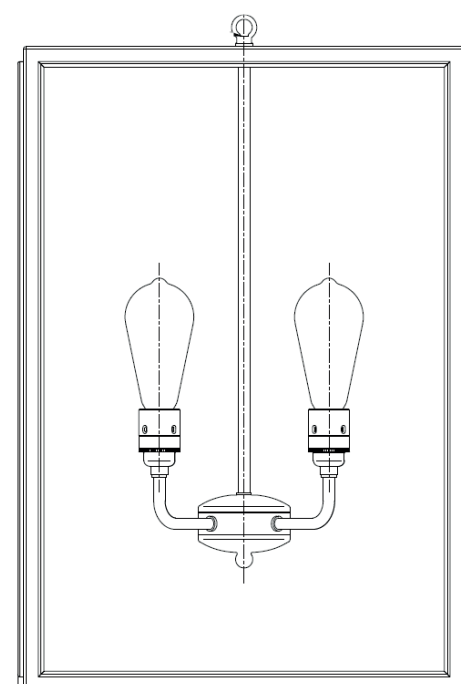

**inédit**

LIGHTING

Name **ILFORD CLOSED TOP-C**  
Number **N101**  
Collection **NAUTIC**

**TEKNA**

## General

Location	Indoor
Main material	Brass/glass
IP rating	IP43
Class	I
Bathroom zone	Zone 3
Voltage	220-240V
Driver Required	No
Cable length ( m )	Made to order
Dimensions ( mm/ W-H-D )	W252-h446-D252
Mounting method	Suspension rod
Brut weight (kg)	4
Gross weight (kg)	5
Packing (mm / W-H-D )	460x460x950
Energy Efficiency %	0,78



## Lamp

Light source	Included
Number of light sources	Caret squirrel cage
Socket Type	1
Bulb shape	E27
Max Lamp Length	ST64
power consumption	165 mm
Luminous Flux	7,7W
Colour Temp	350lm
CRI	2300K
Lifetime	>80
Beam angle	25000hrs.
	360°

## Electrical

Switched	No
Battery	No
Dimmible	Yes
Dimming Range	See dimming list
Dimming method	Phase dimming
Supply Frequency	50/60Hz
Driver/Ballast Voltage	220-240V
Efficacy	A

## Finishes

■ Dark Bronze

