

inédit

LIGHTING


SMALL IP20

INDOOR - INTERNO - INNENBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Fix (not adjustable) 0° - 0°

124x365 mm

Material : CALCYT® plaster

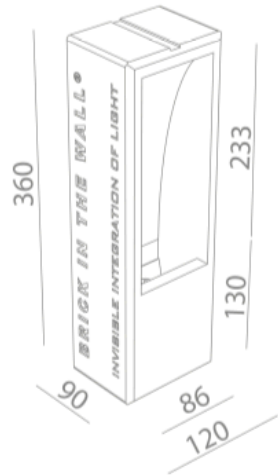

SMALL LED WARMDIM 500LM 230VAC

WARMDIM : DIMS FROM 3000°K TO 2000°K

REF N° 106 71 600 phase DIM

230V/50Hz - 6,0W - incl. line voltage LEDdriver

□ - parallel wiring ▽ 0.2m E-CE-P - 4 Step MacAdam - CRI 80 - B

SMALL LED WARMDIM 500LM REMOTE DRIVER

WARMDIM : DIMS FROM 3000°K TO 2000°K

REF N° 106 29 600 remote driver

230V/50Hz - 6,0W - requires remote LEDdriver

□ - serial wiring ▽ 0.2m E-CE-P - 4 Step MacAdam - CRI 80 - B

SMALL LED 1000LM 230 VAC

REF N°	2700°K	3000°K	4000°K
phase DIM	106 73 000	106 73 100	106 73 200

230V/50Hz - 6,8W - incl. line voltage LEDdriver

□ - parallel wiring ▽ 0.2m E-CE-P - 2 Step MacAdam - CRI 80 - A+

SMALL LED 1000LM REMOTE DRIVER

REF N°	2700°K	3000°K	4000°K
excl. driver	106 27 000	106 27 100	106 27 200

230V/50Hz - 6,8W - requires remote LEDdriver

□ - serial wiring ▽ 0.2m E-CE-P - 2 Step MacAdam - CRI 80 - A+

SMALL LED 600LM 230 VAC

REF N°	2200°K	2700°K	3000°K
phase DIM	106 21 500	106 21 000	106 21 100

230V/50Hz - 6,5W - incl. line voltage LEDdriver

□ - parallel wiring ▽ 0.2m E-CE-P - 2 Step MacAdam - CRI 90 - A

SMALL LED 600LM REMOTE DRIVER

REF N°	2200°K	2700°K	3000°K
excl. driver	106 29 500	106 29 000	106 29 100

230V/50Hz - 6,5W - requires remote LEDdriver

□ - serial wiring ▽ 0.2m E-CE-P - 2 Step MacAdam - CRI 90 - A

SMALL HAL

REF N° 106 01 040

QT14 - max 40W - G9

230V/50Hz ▽ 0.5m E-CE-D

REMOTE LED DRIVER DIM

REF N° 697 60 040 DIM 1-10V DALI PUSH 30W


230V/50Hz - □ - current controlled

▽ - CE - IP20 - 250mA/350mA

Ready for installation in solid walls
Optional plasterkit for installation into gypsum walls

PLASTERKIT SMALL

REF N° 706 01 000 For mounting into gypsum walls
Housing: perforated aluminium

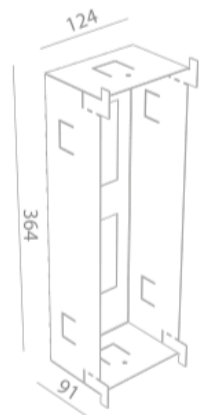

inédit

LIGHTING


SMALL IP54

BATHROOM - STANZA DA BAGNO - BADEZIMMER - BADKAMER - SALLE DE BAINS - CUARTO DE BAÑO

Fix (not adjustable) 0° - 0°

124x365 mm


Material : CALCYT® plaster

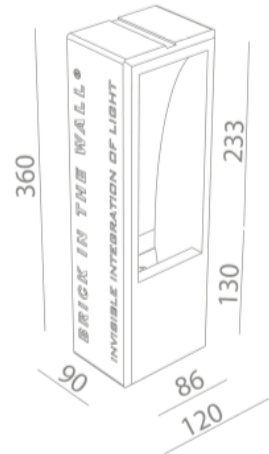

Ready for installation in solid walls
Optional plasterkit for installation into gypsum walls

PLASTERKIT SMALL

REF N° 706 01 000 For mounting into gypsum walls
Housing: perforated aluminium

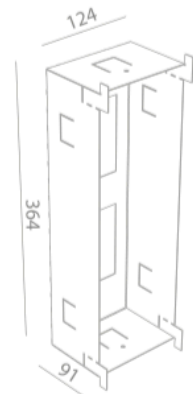

SMALL

392

SMALL LED 600LM 230 VAC

REF N°	2200°K	2700°K	3000°K
phase DIM	106 21 501	106 21 001	106 21 101

230V/50Hz - 6,5W - ind. line voltage LEDdriver

□ - parallel wiring ▽ 0.2m E-CE - P -

2 Step MacAdam - CRI 90 - A

SMALL LED 600LM REMOTE DRIVER

REF N°	2200°K	2700°K	3000°K
excl. driver	106 29 501	106 29 001	106 29 101

230V/50Hz - 6,5W - requires remote LEDdriver

□ - serial wiring ▽ 0.2m E-CE - P -

2 Step MacAdam - CRI 90 - A

REMOTE LED DRIVER DIM

REF N° 697 60 040 DIM 1-10V DALI PUSH 30W

230V/50Hz - □ - current controlled

▽ - CE - IP20 - 250mA/350mA